

SECTION 2.

PROGRAMMING

2.1 GENERAL

The information in this section will enable you to program the radio using any hex programmer that can program 2764 EPROMs. Separate EPROMs are used for the transmitter and receiver. You can calculate the channel data using the procedures listed under Section 2.2. In addition, we've provided "look-up" tables for EPROM data in Tables 2-2 and 2-3.

2.2 FREQUENCY PROGRAMMING

Use the following procedure to calculate the EPROM data for each channel.

2.2.1 REFERENCE DIVISION RATE "R"

The reference division rate must always be calculated for both the transmit and receive frequencies. The 12.0 MHz TCXO output signal (f_{TCXO}) is divided by 16 (f_D) to provide a 750 Hz reference frequency (f_{REF}).

$$f_{REF} = \frac{f_{TCXO}}{f_D} = \frac{12.0(10^6)}{16} = 750(10^3) \quad (1)$$

where,

f_{REF} = reference frequency

f_{TCXO} = TCXO frequency = 12.0 MHz

f_D = fixed divider rate = 16

This reference frequency is sampled and divided by the loop reference frequency (12.5 kHz) to determine the reference division rate (R), as follows:

$$R = \frac{f_{REF}}{f_{LOOP}} = \frac{750(10^3)}{12.5(10^3)} = 150(\text{decimal}) \quad (2)$$

where,

R = reference division rate

f_{REF} = reference frequency = 750 kHz

f_{LOOP} = loop reference frequency = 12.5 kHz

Next, convert this value of R (in decimal) to the data to be stored in the EPROM. Notice that the EPROM data is really the hex equivalent of the decimal number with the characters in reverse order.

$$R = 60 (\text{decimal}) = 03C (\text{hex}) = C30 (\text{data}) \quad (3)$$

Finally, add a leading "0" (zero) to each character before entering the code into the EPROM.

Again, referring to our example:

$$R = C30 (\text{data}) = 0C 03 00 (\text{EPROM code}) \quad (4)$$

Table 2-1 lists some values of the reference division rate (R) for the more common loop reference frequencies. UHF Models generally use 10 kHz or 12.5 kHz.

Table 2-1. Reference Division Rate Values

LOOP REF. FREQ.	REFERENCE DIVISION RATE (R)			
	DECIMAL	HEX	DATA	CODE*
30 kHz	25	019	910	09 01 00
25 kHz	30	01E	E10	0E 01 00
15 kHz	50	032	230	02 03 00
12.5 kHz	60	03C	C30	0C 03 00
10 kHz	75	04B	B40	0B 04 00
5 kHz	150	096	690	06 09 00

2.2.2 TRANSMIT CHANNEL DATA

First, calculate the basic division frequency:

$$D = \frac{f_{TX}}{f_{LOOP}} \quad (5)$$

where,

f_{TX} = transmit channel frequency

f_{LOOP} = loop reference frequency

D = basic division frequency

Next, calculate the divide-by-N and divide-by-A values as follows:

$$D = N(d) + A \quad (6)$$

where,

D = basic division frequency

d = prescaler division rate (fixed at 64)

N = divide-by-N value = no. of whole divisions

A = divide-by-A value = remainder

For example, let's use 455.150 MHz for the transmit channel frequency, and a 12.5 kHz loop reference frequency:

$$D = \frac{f_{TX}}{f_{LOOP}} = \frac{455.150(10^6)}{12.5(10^3)} = 36412 \quad (7)$$

and,

$$D = N(d) + A \quad (8)$$

$$36412 = N(64) + A$$

$$\frac{36412}{64} = N + \frac{A}{64}$$

$$568.9375 = N + \frac{A}{64}$$

$$N = 568 \text{ (decimal) whole divisions}$$

$$A = 0.9375 (64) = 60 \text{ (decimal) remainder}$$

Next, convert these values of N and A (in decimal) to the data to be stored in the EPROM. Notice that the EPROM data is really the hex equivalent of the decimal number *with the characters in reverse order*.

$$N = 568 \text{ (decimal)} = 238 \text{ (hex)} = 832 \text{ (data)} \quad (9)$$

$$A = 60 \text{ (decimal)} = 3C \text{ (hex)} = C3 \text{ (data)} \quad (10)$$

Finally, add a leading "0" (zero) to each character before entering the code into the EPROM.

Again referring to our example:

$$N = 832 \text{ (data)} = 08\ 03\ 02 \text{ (EPROM code)} \quad (11)$$

$$A = C3 \text{ (data)} = 0C\ 03 \text{ (EPROM code)}$$

2.2.3 RECEIVE CHANNEL DATA

The receiver frequency is actually the local oscillator injection frequency, which is 21.6 MHz below the channel frequency. First, calculate the basic division frequency:

$$D = \frac{f_{RX} - f_{IF}}{f_{LOOP}} \quad (12)$$

where,

$$f_{RX} = \text{receive channel frequency}$$

$$f_{IF} = \text{1st IF frequency} = 21.6 \text{ MHz}$$

$$f_{LOOP} = \text{loop reference frequency} = 12.5 \text{ kHz}$$

$$D = \text{basic division frequency}$$

Next, calculate the divide-by- N and divide-by- A values as follows:

$$D = N(d) + A \quad (13)$$

where,

$$D = \text{basic division frequency}$$

$$d = \text{prescaler division rate (fixed at 64)}$$

$$N = \text{divide-by-}N \text{ value}$$

$$A = \text{divide-by-}A \text{ value}$$

As an example, let's use 455.150 MHz for the transmit channel frequency, and a 12.5 kHz loop reference frequency:

$$\begin{aligned} D &= \frac{f_{RX} - f_{IF}}{f_{LOOP}} = \frac{455.150(10^6) - 21.6(10^6)}{12.5(10^3)} \\ &= \frac{433.55(10^6)}{12.5(10^3)} = 34684 \end{aligned} \quad (14)$$

and,

$$D = N(d) + A \quad (15)$$

$$34684 = N(64) + A$$

$$\frac{34684}{64} = N + \frac{A}{64}$$

$$541.9375 = N + \frac{A}{64}$$

$$N = 541 \text{ (decimal) whole divisions}$$

$$A = 0.9375 (64) = 60 \text{ (decimal) remainder}$$

Next, convert these values of A and N (in decimal) to the data to be stored in the EPROM using Table 2-2. Notice that the EPROM data is really the hex equivalent of the decimal number *with the characters in reverse order*.

$$N = 541 \text{ (decimal)} = 21D \text{ (hex)} = D12 \text{ (data)} \quad (16)$$

$$A = 60 \text{ (decimal)} = 3C \text{ (hex)} = C3 \text{ (data)} \quad (17)$$

Finally, add a leading "0" (zero) to each character before entering the code into the EPROM.

Again referring to our example:

$$N = D12 \text{ (data)} = 0D\ 01\ 02 \text{ (EPROM code)} \quad (18)$$

$$A = C3 \text{ (data)} = 0C\ 03 \text{ (EPROM code)}$$

2.2.4 THE MEMORY MAP

Enter the calculated data into the memory map provided in Table 2-2.

2.2.5 PROGRAMMING THE EPROM

Program the EPROM according to the instructions supplied with the programmer that you are using.

Table 2-2. Receiver Frequency EPROM Memory Map

CH.	DATAVALUE	FREQ.	RX (A)			RX (N)			RX (R)			RX (A)			RX (N)			RX (R)			FREQ.	CH.
1	ADDRESS		00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F				2
	CODE																					
3	ADDRESS		10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F				4
	CODE																					
5	ADDRESS		20	21	22	23	24	25	26	27	28	29	2A	2B	2C	2D	2E	2F				6
	CODE																					
7	ADDRESS		30	31	32	33	34	35	36	37	38	39	3A	3B	3C	3D	3E	3F				8
	CODE																					
9	ADDRESS→		40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F				10
	CODE→																					
11	ADDRESS→		50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F				12
	CODE→																					
13	ADDRESS→		60	61	62	63	64	65	66	67	68	69	6A	6B	6C	6D	6E	6F				14
	CODE→																					
15	ADDRESS→		70	71	72	73	74	75	76	77	78	79	7A	7B	7C	7D	7E	7F				16
	CODE→																					

Table 2-3. Transmitter Frequency EPROM Memory Map

CH.	DATAVALUE	FREQ.	TX (A)			TX (N)			TX (R)			TX (A)			TX (N)			TX (R)			FREQ.	CH.
1	ADDRESS		00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F				2
	CODE																					
3	ADDRESS		10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	1E	1F				4
	CODE																					
5	ADDRESS		20	21	22	23	24	25	26	27	28	29	2A	2B	2C	2D	2E	2F				6
	CODE																					
7	ADDRESS		30	31	32	33	34	35	36	37	38	39	3A	3B	3C	3D	3E	3F				8
	CODE																					
9	ADDRESS→		40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F				10
	CODE→																					
11	ADDRESS→		50	51	52	53	54	55	56	57	58	59	5A	5B	5C	5D	5E	5F				12
	CODE→																					
13	ADDRESS→		60	61	62	63	64	65	66	67	68	69	6A	6B	6C	6D	6E	6F				14
	CODE→																					
15	ADDRESS→		70	71	72	73	74	75	76	77	78	79	7A	7B	7C	7D	7E	7F				16
	CODE→																					

2.3 EPROM INSTALLATION

(See Figure 2-1)

1. Cap Bolts
2. Bolt Spacers
3. Cap Bolts
4. Bottom Cover
5. Oval Screws
6. TX Unit Cover
7. RX Unit Cover
8. TX Programmed EPROM
9. RX Programmed EPROM
10. TX Unit
11. RX Unit
12. Main Unit

Table 2-4. EPROM Installation

TYPE	STEP	PROCEDURE
RX UNIT	1	Turn KG106 transceiver over to remove four cap bolts (1) & (3) and two bolt spacers (2).
	2	Remove bottom cover (4) from main unit (12).
	3	Remove ten screws (5) from RX unit cover (7).
	4	Remove RX unit cover (7) from RX unit chassis (11).
	5	Insert the programmed EPROM (9), making sure that the notch on the EPROM lines up with the notch on the PCB.
TX UNIT	1	Remove eight screws (5) from TX unit cover (6).
	2	Remove TX unit cover (6) from TX unit (10).
	3	Insert the programmed EPROM (8), making sure that the notch on the EPROM lines up with the notch on the PCB.
	4	To reassemble reverse the steps above.

NOTE:

DO NOT reassemble until tuning adjustments are completed.

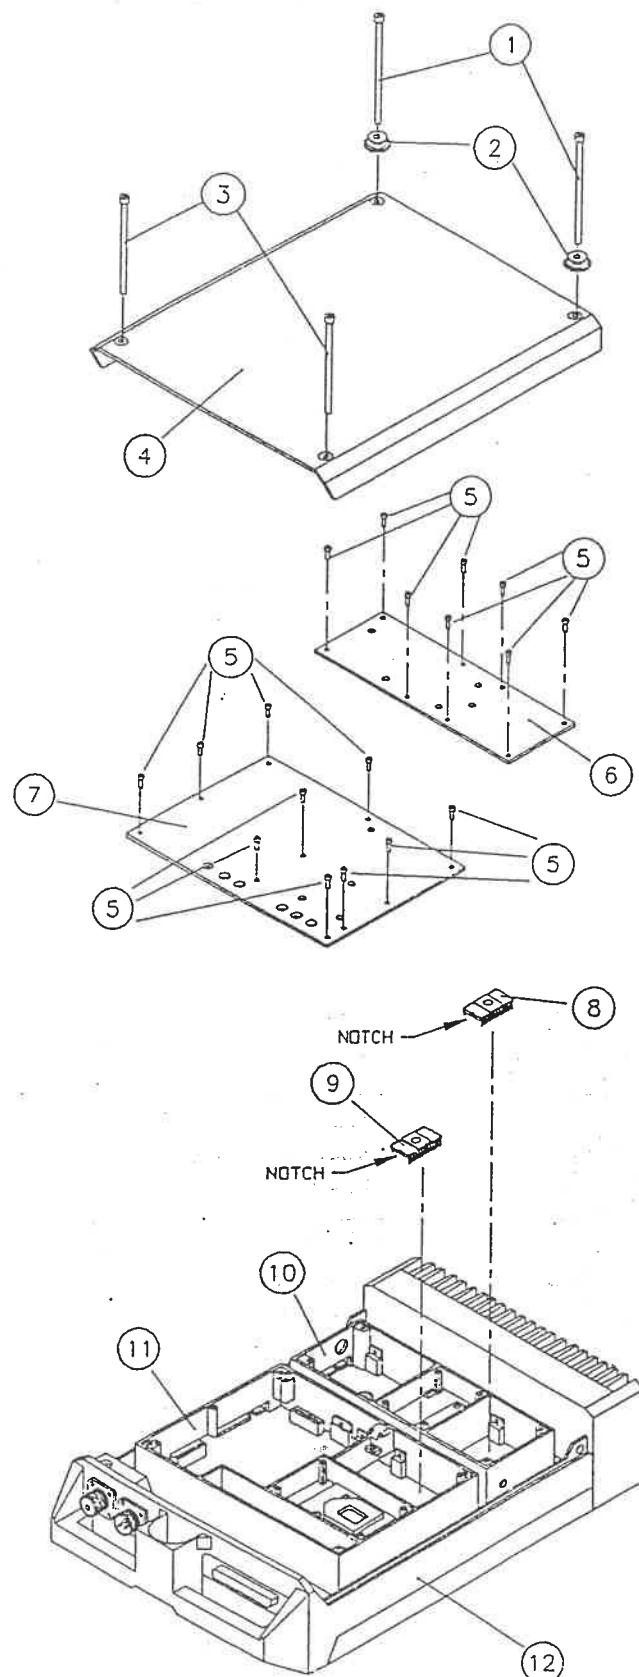


Figure 2-1. EPROM Installation

2.4 EPROM CHARTS

A - D' CONVERSION LIST (1)

No.	Code	No.	Code	No.	Code	No.	Code	No.	Code	No.	Code	No.	Code	No.	Code
1	1 0	76	C 4	151	7 9	226	2 E	301	0 2 1	376	8 7 1	451	J C 1	526	E 0 2
2	2 0	77	0 4	152	8 9	227	3 E	302	E 2 1	377	9 7 1	452	4 C 1	527	F 0 2
3	3 0	78	E 4	153	9 9	228	4 E	303	F 2 1	378	A 7 1	453	5 C 1	528	0 1 2
4	4 0	79	F 4	154	A 9	229	5 E	304	0 3 1	379	0 7 1	454	6 C 1	529	1 1 2
5	5 0	80	0 5	155	B 9	230	6 E	305	1 3 1	380	C 7 1	455	7 C 1	530	2 1 2
6	6 0	81	1 5	156	C 9	231	7 E	306	2 3 1	381	D 7 1	456	8 C 1	531	3 1 2
7	7 0	82	2 5	157	D 9	232	8 E	307	3 3 1	382	E 7 1	457	9 C 1	532	4 1 2
8	8 0	83	3 5	158	E 9	233	9 E	308	4 3 1	383	F 7 1	458	A C 1	533	5 1 2
9	9 0	84	4 5	159	F 9	234	A E	309	5 3 1	384	0 8 1	459	B C 1	534	6 1 2
10	A 0	85	5 5	160	0 A	235	B E	310	6 3 1	385	1 8 1	460	C C 1	535	7 1 2
11	B 0	86	6 5	161	1 A	236	C E	311	7 3 1	386	2 8 1	461	D C 1	536	8 1 2
12	C 0	87	7 5	162	2 A	237	D E	312	8 3 1	387	3 8 1	462	E C 1	537	9 1 2
13	D 0	88	8 5	163	3 A	238	E E	313	9 3 1	388	4 8 1	463	F C 1	538	A 1 2
14	E 0	89	9 5	164	4 A	239	F E	314	A 3 1	389	5 8 1	464	0 0 1	539	0 1 2
15	F 0	90	A 5	165	5 A	240	0 F	315	B 3 1	390	6 8 1	465	1 0 1	540	C 1 2
16	0 1	91	B 5	166	6 A	241	1 F	316	C 3 1	391	7 8 1	466	2 0 1	541	D 1 2
17	1 1	92	C 5	167	7 A	242	2 F	317	D 3 1	392	8 8 1	467	3 0 1	542	E 1 2
18	2 1	93	D 5	168	8 A	243	3 F	318	E 3 1	393	9 8 1	468	4 0 1	543	F 1 2
19	3 1	94	E 5	169	9 A	244	4 F	319	F 3 1	394	A 8 1	469	5 0 1	544	0 2 2
20	4 1	95	F 5	170	A A	245	5 F	320	0 4 1	395	B 8 1	470	6 0 1	545	1 2 2
21	5 1	96	0 6	171	B A	246	6 F	321	1 4 1	396	C 8 1	471	7 0 1	546	2 2 2
22	6 1	97	1 6	172	C A	247	7 F	322	2 4 1	397	D 8 1	472	8 0 1	547	3 2 2
23	7 1	98	2 6	173	D A	248	8 F	323	3 4 1	398	E 8 1	473	9 0 1	548	4 2 2
24	8 1	99	3 6	174	E A	249	9 F	324	4 4 1	399	F 8 1	474	A 0 1	549	5 2 2
25	9 1	100	4 6	175	F A	250	A F	325	5 4 1	400	0 9 1	475	B 0 1	550	6 2 2
26	A 1	101	5 6	176	0 B	251	B F	326	6 4 1	401	1 9 1	476	C 0 1	551	7 2 2
27	B 1	102	6 6	177	1 B	252	C F	327	7 4 1	402	2 9 1	477	D 0 1	552	8 2 2
28	C 1	103	7 6	178	2 B	253	D F	328	8 4 1	403	3 9 1	478	E 0 1	553	9 2 2
29	D 1	104	8 6	179	3 B	254	E F	329	9 4 1	404	4 9 1	479	F 0 1	554	A 2 2
30	E 1	105	9 6	180	4 B	255	F F	330	A 4 1	405	5 9 1	480	0 E 1	555	B 2 2
31	F 1	106	A 6	181	5 B	256	0 0 1	331	B 4 1	406	6 9 1	481	1 E 1	556	C 2 2
32	0 2	107	B 6	182	6 B	257	1 0 1	332	C 4 1	407	7 9 1	482	2 E 1	557	D 2 2
33	1 2	108	C 6	183	7 B	258	2 0 1	333	D 4 1	408	8 9 1	483	3 E 1	558	E 2 2
34	2 2	109	D 6	184	8 B	259	3 0 1	334	E 4 1	409	9 9 1	484	4 E 1	559	F 2 2
35	3 2	110	E 6	185	9 B	260	4 0 1	335	F 4 1	410	A 9 1	485	5 E 1	560	0 3 2
36	4 2	111	F 6	186	A B	261	5 0 1	336	0 5 1	411	B 9 1	486	6 E 1	561	1 3 2
37	5 2	112	0 7	187	B B	262	6 0 1	337	1 5 1	412	C 9 1	487	7 E 1	562	2 3 2
38	6 2	113	1 7	188	C B	263	7 0 1	338	2 5 1	413	D 9 1	488	8 E 1	563	3 3 2
39	7 2	114	2 7	189	D B	264	8 0 1	339	3 5 1	414	E 9 1	489	9 E 1	564	4 3 2
40	8 2	115	3 7	190	E B	265	9 0 1	340	4 5 1	415	F 9 1	490	A E 1	565	5 3 2
41	9 2	116	4 7	191	F B	266	A 0 1	341	5 5 1	416	0 A 1	491	B E 1	566	6 3 2
42	A 2	117	5 7	192	0 C	267	B 0 1	342	6 5 1	417	1 A 1	492	C E 1	567	7 3 2
43	B 2	118	6 7	193	1 C	268	C 0 1	343	7 5 1	418	2 A 1	493	D E 1	568	8 3 2
44	C 2	119	7 7	194	2 C	269	D 0 1	344	8 5 1	419	3 A 1	494	E E 1	569	9 3 2
45	D 2	120	8 7	195	3 C	270	E 0 1	345	9 5 1	420	4 A 1	495	F E 1	570	A 3 2
46	E 2	121	9 7	196	4 C	271	F 0 1	346	A 5 1	421	5 A 1	496	0 F 1	571	B 3 2
47	F 2	122	A 7	197	5 C	272	0 1 1	347	B 5 1	422	6 A 1	497	1 F 1	572	C 3 2
48	0 3	123	B 7	198	6 C	273	1 1 1	348	C 5 1	423	7 A 1	498	2 F 1	573	D 3 2
49	1 3	124	C 7	199	7 C	274	2 1 1	349	D 5 1	424	8 A 1	499	3 F 1	574	E 3 2
50	2 3	125	0 7	200	8 C	275	3 1 1	350	E 5 1	425	9 A 1	500	4 F 1	575	F 3 2
51	3 3	126	E 7	201	9 C	276	4 1 1	351	F 5 1	426	A A 1	501	5 F 1	576	0 4 2
52	4 3	127	F 7	202	A C	277	5 1 1	352	0 6 1	427	B A 1	502	6 F 1	577	1 4 2
53	5 3	128	0 8	203	B C	278	6 1 1	353	1 6 1	428	C A 1	503	7 F 1	578	2 4 2
54	6 3	129	1 8	204	C C	279	7 1 1	354	2 6 1	429	D A 1	504	8 F 1	579	3 4 2
55	7 3	130	2 8	205	D C	280	8 1 1	355	3 6 1	430	E A 1	505	9 F 1	580	4 4 2
56	8 3	131	3 8	206	E C	281	9 1 1	356	4 6 1	431	F A 1	506	A F 1	581	5 4 2
57	9 3	132	4 8	207	F C	282	A 1 1	357	5 6 1	432	0 B 1	507	B F 1	582	6 4 2
58	A 3	133	5 8	208	0 D	283	B 1 1	358	6 6 1	433	1 B 1	508	C F 1	583	7 4 2
59	B 3	134	6 8	209	1 D	284	C 1 1	359	7 6 1	434	2 B 1	509	D F 1	584	8 4 2
60	C 3	135	7 8	210	2 D	285	D 1 1	360	8 6 1	435	3 B 1	510	E F 1	585	9 4 2
61	D 3	136	8 8	211	3 D	286	E 1 1	361	9 6 1	436	4 B 1	511	F F 1	586	A 4 2
62	E 3	137	9 8	212	4 D	287	F 1 1	362	A 6 1	437	5 B 1	512	0 0 2	587	B 4 2
63	F 3	138	A 8	213	5 D	288	0 2 1	363	B 6 1	438	6 B 1	513	1 0 2	588	C 4 2
64	0 4	139	B 8	214	6 D	289	1 2 1	364	C 6 1	439	7 B 1	514	2 0 2	589	D 4 2
65	1 4	140	C 8	215	7 D	290	2 2 1	365	0 6 1	440	8 B 1	515	3 0 2	590	E 4 2
66	2 4	141	D 8	216	8 D	291	3 2 1	366	E 6 1	441	9 B 1	516	4 0 2	591	F 4 2
67	3 4	142	E 8	217	9 D	292	4 2 1	367	F 6 1	442	A 0 1	517	5 0 2	592	0 5 2
68	4 4	143	F 8	218	A D	293	5 2 1	368	0 7 1	443	B 0 1	518	6 0 2	593	1 5 2
69	5 4	144	0 9	219	B D	294	6 2 1	369	1 7 1	444	C 0 1	519	7 0 2	594	2 5 2
70	6 4	145	1 9	220	C D	295	7 2 1	370	2 7 1	445	D 0 1	520	8 0 2	595	3 5 2
71	7 4	146	2 9	221	D D	296	8 2 1	371	3 7 1	446	E 0 1	521	9 0 2	596	4 5 2
72	8 4	147	3 9	222	E D	297	9 2 1	372	4 7 1	447	F 0 1	522	A 0 2	597	5 5 2
73	9 4	148	4 9	223	F D	298	A 2 1	373	5 7 1	448	0 C 1	523	B 0 2	598	6 5 2
74	A 4	149	5 9	224	0 E	299	B 2 1	374	6 7 1	449	1 C 1	524	C 0 2	599	7 5 2
75	0 4	150	6 9	225	1 E	300	C 2 1	375	7 7 1	450	2 C 1	525	D 0 2	600	8 5 2
0-75		76-150		151-225		226-300		301-375		376-450		451-525		526-600	

A - D CONVERSION LIST (2)

No.	Code	No.	Code	No.	Code	No.	Code	No.	Code	No.	Code
601	9 5 2	676	4 A 2	751	F E 2	826	A 3 3	901	5 8 3	976	0 0 3
602	A 5 2	677	5 A 2	752	0 F 2	827	8 3 3	902	6 8 3	977	1 0 3
603	8 5 2	678	6 A 2	753	1 F 2	828	C 3 3	903	7 8 3	978	2 0 3
604	C 5 2	679	7 A 2	754	2 F 2	829	0 3 3	904	8 8 3	979	3 0 3
605	D 5 2	680	8 A 2	755	3 F 2	830	E 3 3	905	9 8 3	980	4 0 3
606	C 5 2	681	9 A 2	756	4 F 2	831	F 3 3	906	A 8 3	981	5 0 3
607	F 5 2	682	A A 2	757	5 F 2	832	0 4 3	907	8 8 3	982	6 0 3
608	0 6 2	683	B A 2	758	6 F 2	833	1 4 3	908	C 8 3	983	7 0 3
609	1 6 2	684	C A 2	759	7 F 2	834	2 4 3	909	D 8 3	984	8 0 3
610	2 6 2	685	0 A 2	760	8 F 2	835	3 4 3	910	E 8 3	985	9 0 3
611	3 6 2	686	E A 2	761	9 F 2	836	4 4 3	911	F 8 3	986	A 0 3
612	4 6 2	687	F A 2	762	A F 2	837	5 4 3	912	0 9 3	987	8 0 3
613	5 6 2	688	0 8 2	763	B F 2	838	6 4 3	913	1 9 3	988	C 0 3
614	6 6 2	689	1 8 2	764	C F 2	839	7 4 3	914	2 9 3	989	0 0 3
615	7 6 2	690	2 8 2	765	0 F 2	840	8 4 3	915	3 9 3	990	E 0 3
616	8 6 2	691	3 8 2	766	E F 2	841	9 4 3	916	4 9 3	991	F 0 3
617	9 6 2	692	4 8 2	767	F F 2	842	A 4 3	917	5 9 3	992	0 E 3
618	A 6 2	693	5 8 2	768	0 0 3	843	8 4 3	918	6 9 3	993	1 E 3
619	B 6 2	694	6 8 2	769	1 0 3	844	C 4 3	919	7 9 3	994	2 E 3
620	C 6 2	695	7 8 2	770	2 0 3	845	0 4 3	920	8 9 3	995	3 E 3
621	0 6 2	696	8 8 2	771	3 0 3	846	E 4 3	921	9 9 3	996	4 E 3
622	E 6 2	697	9 8 2	772	4 0 3	847	F 4 3	922	A 9 3	997	5 E 3
623	F 6 2	698	A 8 2	773	5 0 3	848	0 5 3	923	8 9 3	998	6 E 3
624	0 7 2	699	0 8 2	774	6 0 3	849	1 5 3	924	C 9 3	999	7 E 3
625	1 7 2	700	C 8 2	775	7 0 3	850	2 5 3	925	0 9 3	1000	8 E 3
626	2 7 2	701	0 8 2	776	8 0 3	851	3 5 3	926	E 9 3		
627	3 7 2	702	E 8 2	777	9 0 3	852	4 5 3	927	F 9 3		
628	4 7 2	703	F 8 2	778	A 0 3	853	5 5 3	928	0 A 3		
629	5 7 2	704	0 C 2	779	8 0 3	854	6 5 3	929	1 A 3		
630	6 7 2	705	1 C 2	780	C 0 3	855	7 5 3	930	2 A 3		
631	7 7 2	706	2 C 2	781	0 0 3	856	8 5 3	931	3 A 3		
632	8 7 2	707	3 C 2	782	E 0 3	857	9 5 3	932	4 A 3		
633	9 7 2	708	4 C 2	783	F 0 3	858	A 5 3	933	5 A 3		
634	A 7 2	709	5 C 2	784	0 1 3	859	B 5 3	934	6 A 3		
635	8 7 2	710	6 C 2	785	1 1 3	860	C 5 3	935	7 A 3		
636	C 7 2	711	7 C 2	786	2 1 3	861	0 5 3	936	8 A 3		
637	0 7 2	712	8 C 2	787	3 1 3	862	E 5 3	937	9 A 3		
638	E 7 2	713	9 C 2	788	4 1 3	863	F 5 3	938	A A 3		
639	F 7 2	714	A C 2	789	5 1 3	864	0 6 3	939	0 A 3		
640	0 8 2	715	0 C 2	790	6 1 3	865	1 6 3	940	C A 3		
641	1 8 2	716	C C 2	791	7 1 3	866	2 6 3	941	0 A 3		
642	2 0 2	717	0 C 2	792	8 1 3	867	3 6 3	942	E A 3		
643	3 8 2	718	E C 2	793	9 1 3	868	4 6 3	943	F A 3		
644	4 8 2	719	F C 2	794	A 1 3	869	5 6 3	944	0 0 3		
645	5 8 2	720	0 0 2	795	8 1 3	870	6 6 3	945	1 8 3		
646	6 8 2	721	1 0 2	796	C 1 3	871	7 6 3	946	2 8 3		
647	7 8 2	722	2 0 2	797	D 1 3	872	8 6 3	947	3 0 3		
648	8 0 2	723	3 0 2	798	E 1 3	873	9 6 3	948	4 0 3		
649	9 8 2	724	4 0 2	799	F 1 3	874	A 6 3	949	5 8 3		
650	A 8 2	725	5 0 2	800	0 2 3	875	8 6 3	950	6 0 3		
651	0 0 2	726	6 0 2	801	1 2 3	876	C 6 3	951	7 0 3		
652	C 8 2	727	7 0 2	802	2 2 3	877	0 6 3	952	8 0 3		
653	0 8 2	728	8 0 2	803	3 2 3	878	E 6 3	953	9 0 3		
654	E 8 2	729	9 0 2	804	4 2 3	879	F 6 3	954	A 0 3		
655	F 8 2	730	A 0 2	805	5 2 3	880	0 7 3	955	B 8 3		
656	0 9 2	731	8 0 2	806	6 2 3	881	1 7 3	956	C 0 3		
657	1 9 2	732	C 0 2	807	7 2 3	882	2 7 3	957	0 0 3		
658	2 9 2	733	0 0 2	808	8 2 3	883	3 7 3	958	E 0 3		
659	3 9 2	734	E 0 2	809	9 2 3	884	4 7 3	959	F 0 3		
660	4 9 2	735	F 0 2	810	A 2 3	885	5 7 3	960	0 C 3		
661	5 9 2	736	0 E 2	811	0 2 3	886	6 7 3	961	1 C 3		
662	6 9 2	737	1 E 2	812	C 2 3	887	7 7 3	962	2 C 3		
663	7 9 2	738	2 E 2	813	0 2 3	888	0 7 3	963	3 C 3		
664	8 9 2	739	3 E 2	814	E 2 3	889	9 7 3	964	4 C 3		
665	9 9 2	740	4 E 2	815	F 2 3	890	A 7 3	965	5 C 3		
666	A 9 2	741	5 E 2	816	0 3 3	891	0 7 3	966	6 C 3		
667	0 9 2	742	6 E 2	817	1 3 3	892	C 7 3	967	7 C 3		
668	C 9 2	743	7 E 2	818	2 3 3	893	0 7 3	968	8 C 3		
669	0 9 2	744	8 E 2	819	3 3 3	894	E 7 3	969	9 C 3		
670	E 9 2	745	9 E 2	820	4 3 3	895	F 7 3	970	A C 3		
671	F 9 2	746	A E 2	821	5 3 3	896	0 8 3	971	8 C 3		
672	0 A 2	747	0 E 2	822	6 3 3	897	1 0 3	972	C C 3		
673	1 A 2	748	C E 2	823	7 3 3	898	2 8 3	973	0 C 3		
674	2 A 2	749	0 E 2	824	8 3 3	899	3 0 3	974	E C 3		
675	3 A 2	750	E E 2	825	9 3 3	900	4 0 3	975	F C 3		
601-675		676-750		751-825		826-900		901-975		976-1000	

***B	UHF TX PROGRAM							UHF RX PROGRAM									
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	
364.000	00	00	07	0C	01	0C	03	00	00	00	0C	0A	01	0C	03	00	
364.025	02	00	07	0C	01	0C	03	00	02	00	0C	0A	01	0C	03	00	
364.050	04	00	07	0C	01	0C	03	00	04	00	0C	0A	01	0C	03	00	
364.075	06	00	07	0C	01	0C	03	00	06	00	0C	0A	01	0C	03	00	
364.100	08	00	07	0C	01	0C	03	00	08	00	0C	0A	01	0C	03	00	
364.125	0A	00	07	0C	01	0C	03	00	0A	00	0C	0A	01	0C	03	00	
364.150	0C	00	07	0C	01	0C	03	00	0C	00	0C	0A	01	0C	03	00	
364.175	0E	00	07	0C	01	0C	03	00	0E	00	0C	0A	01	0C	03	00	
364.200	00	01	07	0C	01	0C	03	00	00	01	0C	0A	01	0C	03	00	
364.225	02	01	07	0C	01	0C	03	00	02	01	0C	0A	01	0C	03	00	
364.250	04	01	07	0C	01	0C	03	00	04	01	0C	0A	01	0C	03	00	
364.275	06	01	07	0C	01	0C	03	00	06	01	0C	0A	01	0C	03	00	
364.300	08	01	07	0C	01	0C	03	00	08	01	0C	0A	01	0C	03	00	
364.325	0A	01	07	0C	01	0C	03	00	0A	01	0C	0A	01	0C	03	00	
364.350	0C	01	07	0C	01	0C	03	00	0C	01	0C	0A	01	0C	03	00	
364.375	0E	01	07	0C	01	0C	03	00	0E	01	0C	0A	01	0C	03	00	
364.400	00	02	07	0C	01	0C	03	00	00	02	0C	0A	01	0C	03	00	
364.425	02	02	07	0C	01	0C	03	00	02	02	0C	0A	01	0C	03	00	
364.450	04	02	07	0C	01	0C	03	00	04	02	0C	0A	01	0C	03	00	
364.475	06	02	07	0C	01	0C	03	00	06	02	0C	0A	01	0C	03	00	
364.500	08	02	07	0C	01	0C	03	00	08	02	0C	0A	01	0C	03	00	
364.525	0A	02	07	0C	01	0C	03	00	0A	02	0C	0A	01	0C	03	00	
364.550	0C	02	07	0C	01	0C	03	00	0C	02	0C	0A	01	0C	03	00	
364.575	0E	02	07	0C	01	0C	03	00	0E	02	0C	0A	01	0C	03	00	
364.600	00	03	07	0C	01	0C	03	00	00	03	0C	0A	01	0C	03	00	
364.625	02	03	07	0C	01	0C	03	00	02	03	0C	0A	01	0C	03	00	
364.650	04	03	07	0C	01	0C	03	00	04	03	0C	0A	01	0C	03	00	
364.675	06	03	07	0C	01	0C	03	00	06	03	0C	0A	01	0C	03	00	
364.700	08	03	07	0C	01	0C	03	00	08	03	0C	0A	01	0C	03	00	
364.725	0A	03	07	0C	01	0C	03	00	0A	03	0C	0A	01	0C	03	00	
364.750	0C	03	07	0C	01	0C	03	00	0C	03	0C	0A	01	0C	03	00	
364.775	0E	03	07	0C	01	0C	03	00	0E	03	0C	0A	01	0C	03	00	
364.800	00	04	08	0C	01	0C	03	00	00	04	08	0C	0A	01	0C	03	00
364.825	02	00	08	0C	01	0C	03	00	02	00	08	0C	0A	01	0C	03	00
364.850	04	00	08	0C	01	0C	03	00	04	00	08	0C	0A	01	0C	03	00
364.875	06	00	08	0C	01	0C	03	00	06	00	08	0C	0A	01	0C	03	00
364.900	08	00	08	0C	01	0C	03	00	08	00	08	0C	0A	01	0C	03	00
364.925	0A	00	08	0C	01	0C	03	00	0A	00	08	0C	0A	01	0C	03	00
364.950	0C	00	08	0C	01	0C	03	00	0C	00	08	0C	0A	01	0C	03	00
364.975	0E	00	08	0C	01	0C	03	00	0E	00	08	0C	0A	01	0C	03	00
365.000	00	01	08	0C	01	0C	03	00	00	01	08	0C	0A	01	0C	03	00
365.025	02	01	08	0C	01	0C	03	00	02	01	08	0C	0A	01	0C	03	00
365.050	04	01	08	0C	01	0C	03	00	04	01	08	0C	0A	01	0C	03	00
365.075	06	01	08	0C	01	0C	03	00	06	01	08	0C	0A	01	0C	03	00
365.100	08	01	08	0C	01	0C	03	00	08	01	08	0C	0A	01	0C	03	00
365.125	0A	01	08	0C	01	0C	03	00	0A	01	08	0C	0A	01	0C	03	00
365.150	0C	01	08	0C	01	0C	03	00	0C	01	08	0C	0A	01	0C	03	00
365.175	0E	01	08	0C	01	0C	03	00	0E	01	08	0C	0A	01	0C	03	00
365.200	00	02	08	0C	01	0C	03	00	00	02	08	0C	0A	01	0C	03	00
365.225	02	02	08	0C	01	0C	03	00	02	02	08	0C	0A	01	0C	03	00
365.250	04	02	08	0C	01	0C	03	00	04	02	08	0C	0A	01	0C	03	00
365.275	06	02	08	0C	01	0C	03	00	06	02	08	0C	0A	01	0C	03	00
365.300	08	02	08	0C	01	0C	03	00	08	02	08	0C	0A	01	0C	03	00
365.325	0A	02	08	0C	01	0C	03	00	0A	02	08	0C	0A	01	0C	03	00
365.350	0C	02	08	0C	01	0C	03	00	0C	02	08	0C	0A	01	0C	03	00
365.375	0E	02	08	0C	01	0C	03	00	0E	02	08	0C	0A	01	0C	03	00
365.400	00	03	08	0C	01	0C	03	00	00	03	08	0C	0A	01	0C	03	00
365.425	02	03	08	0C	01	0C	03	00	02	03	08	0C	0A	01	0C	03	00
365.450	04	03	08	0C	01	0C	03	00	04	03	08	0C	0A	01	0C	03	00
365.475	06	03	08	0C	01	0C	03	00	06	03	08	0C	0A	01	0C	03	00

--- UHF TX PROGRAM ---																	--- UHF RX PROGRAM ---																
0 1 2 3 4 5 6 7																	0 1 2 3 4 5 6 7																
F (MHz) 8 9 A B C D E F																	0 1 2 3 4 5 6 7																
367.000	00	03	0A	0C	01	0C	03	00	00	03	0F	0A	01	0C	03	00	08	02	01	0B	01	0C	03	00									
367.025	02	03	0A	0C	01	0C	03	00	02	03	0F	0A	01	0C	03	00	0A	02	01	0B	01	0C	03	00									
367.050	04	03	0A	0C	01	0C	03	00	04	03	0F	0A	01	0C	03	00	0C	02	01	0B	01	0C	03	00									
367.075	06	03	0A	0C	01	0C	03	00	06	03	0F	0A	01	0C	03	00	0E	02	01	0B	01	0C	03	00									
367.100	08	03	0A	0C	01	0C	03	00	08	03	0F	0A	01	0C	03	00	00	03	01	0B	01	0C	03	00									
367.125	0A	03	0A	0C	01	0C	03	00	0A	03	0F	0A	01	0C	03	00	02	03	01	0B	01	0C	03	00									
367.150	0C	03	0A	0C	01	0C	03	00	0C	03	0F	0A	01	0C	03	00	04	03	01	0B	01	0C	03	00									
367.175	0E	03	0A	0C	01	0C	03	00	0E	03	0F	0A	01	0C	03	00	06	03	01	0B	01	0C	03	00									
367.200	00	00	0B	0C	01	0C	03	00	00	00	00	0B	01	0C	03	00	06	03	01	0B	01	0C	03	00									
367.225	02	00	0B	0C	01	0C	03	00	02	00	00	0B	01	0C	03	00	0A	03	01	0B	01	0C	03	00									
367.250	04	00	0B	0C	01	0C	03	00	04	00	00	0B	01	0C	03	00	0C	03	01	0B	01	0C	03	00									
367.275	06	00	0B	0C	01	0C	03	00	06	00	00	0B	01	0C	03	00	0E	03	01	0B	01	0C	03	00									
367.300	08	00	0B	0C	01	0C	03	00	08	00	00	0B	01	0C	03	00	00	00	02	0B	01	0C	03	00									
367.325	0A	00	0B	0C	01	0C	03	00	0A	00	00	0B	01	0C	03	00	02	00	02	0B	01	0C	03	00									
367.350	0C	00	0B	0C	01	0C	03	00	0C	00	00	0B	01	0C	03	00	04	00	02	0B	01	0C	03	00									
367.375	0E	00	0B	0C	01	0C	03	00	0E	00	00	0B	01	0C	03	00	06	00	02	0B	01	0C	03	00									
367.400	00	01	0B	0C	01	0C	03	00	00	01	00	0B	01	0C	03	00	08	00	02	0B	01	0C	03	00									
367.425	02	01	0B	0C	01	0C	03	00	02	01	00	0B	01	0C	03	00	0A	01	02	0B	01	0C	03	00									
367.450	04	01	0B	0C	01	0C	03	00	04	01	00	0B	01	0C	03	00	0C	01	02	0B	01	0C	03	00									
367.475	06	01	0B	0C	01	0C	03	00	06	01	00	0B	01	0C	03	00	0E	01	02	0B	01	0C	03	00									
367.500	08	01	0B	0C	01	0C	03	00	08	01	00	0B	01	0C	03	00	00	01	02	0B	01	0C	03	00									
367.525	0A	01	0B	0C	01	0C	03	00	0A	01	00	0B	01	0C	03	00	02	01	02	0B	01	0C	03	00									
367.550	0C	01	0B	0C	01	0C	03	00	0C	01	00	0B	01	0C	03	00	04	01	02	0B	01	0C	03	00									
367.575	0E	01	0B	0C	01	0C	03	00	0E	01	00	0B	01	0C	03	00	06	01	02	0B	01	0C	03	00									
367.600	00	02	0B	0C	01	0C	03	00	00	02	00	0B	01	0C	03	00	08	01	02	0B	01	0C	03	00									
367.625	02	02	0B	0C	01	0C	03	00	02	02	00	0B	01	0C	03	00	0A	01	02	0B	01	0C	03	00									
367.650	04	02	0B	0C	01	0C	03	00	04	02	00	0B	01	0C	03	00	0C	01	02	0B	01	0C	03	00									
367.675	06	02	0B	0C	01	0C	03	00	06	02	00	0B	01	0C	03	00	0E	01	02	0B	01	0C	03	00									
367.700	08	02	0B	0C	01	0C	03	00	08	02	00	0B	01	0C	03	00	00	02	02	0B	01	0C	03	00									
367.725	0A	02	0B	0C	01	0C	03	00	0A	02	00	0B	01	0C	03	00	02	02	02	0B	01	0C	03	00									
367.750	0C	02	0B	0C	01	0C	03	00	0C	02	00	0B	01	0C	03	00	04	02	02	0B	01	0C	03	00									
367.775	0E	02	0B	0C	01	0C	03	00	0E	02	00	0B	01	0C	03	00	06	02	02	0B	01	0C	03	00									
367.800	00	03	0B	0C	01	0C	03	00	00	03	00	0B	01	0C	03	00	08	02	02	0B	01	0C	03	00									
367.825	02	03	0B	0C	01	0C	03	00	02	03	00	0B	01	0C	03	00	0A	02	02	0B	01	0C	03	00									
367.850	04	03	0B	0C	01	0C	03	00	04	03	00	0B	01	0C	03	00	0C	02	02	0B	01	0C	03	00									
367.875	06	03	0B	0C	01	0C	03	00	06	03	00	0B	01	0C	03	00	0E	02	02	0B	01	0C	03	00									
367.900	08	03	0B	0C	01	0C	03	00	08	03	00	0B	01	0C	03	00	00	03	02	0B	01	0C	03	00									
367.925	0A	03	0B	0C	01	0C	03	00	0A	03	00	0B	01	0C	03	00	02	03	02	0B	01	0C	03	00									
367.950	0C	03	0B	0C	01	0C	03	00	0C	03	00	0B	01	0C	03	00	04	03	02	0B	01	0C	03	00									
368.000	00	00	0C	0C	01	0C	03	00	00	00	01	0B	01	0C	03	00	06	03	02	0B	01	0C	03	00									
368.025	02	00	0C	0C	01	0C	03	00	02	00	01	0B	01	0C	03	00	0A	03	02	0B	01	0C	03	00									
368.050	04	00	0C	0C	01	0C	03	00	04	00	01	0B	01	0C	03	00	0C	03	02	0B	01	0C	03	00									
368.075	06	00	0C	0C	01	0C	03	00	06	00	01	0B	01	0C	03	00	0E	03	02	0B	01	0C	03	00									
368.100	08	00	0C	0C	01	0C	03	00	08	00	01	0B	01	0C	03	00	00	00	03	0B	01	0C	03	00									
368.125	0A	00	0C	0C	01	0C	03	00	0A	00	01	0B	01	0C	03	00	02	00	03	0B	01	0C	03	00									
368.150	0C	00	0C	0C	01	0C	03	00	0C	00	01	0B	01	0C	03	00	04	00	03	0B	01	0C	03	00									
368.175	0E	00	0C	0C	01	0C	03	00	0E	00	01	0B	01	0C	03	00	06	00	03	0B	01	0C	03	00									
368.200	00	01	0C	0C	01	0C	03	00	00	01	01	0B	01	0C	03	00	08	00	03	0B	01	0C	03	00									
368.225	02	01	0C	0C	01	0C	03	00	02	01	01	0B	01	0C	03	00	0A	00	03	0B	01	0C	03	00									
368.250	04	01	0C	0C	01	0C	03	00	04	01	01	0B	01	0C	03	00	0C	00	03	0B	01	0C	03	00									
368.275	06	01	0C	0C	01	0C	03	00	06	01	01	0B	01	0C	03	00	0E	00	03	0B	01	0C	03	00									
368.300	08	01	0C	0C	01	0C	03	00	08	01	01	0B	01	0C	03	00	00	01	03	0B	01	0C	03	00									
368.325	0A	01	0C	0C	01	0C	03	00	0A	01	01	0B	01	0C	03	00	02	01	03	0B	01	0C	03	00									
368.350	0C	01	0C	0C	01	0C	03	00	0C	01	01	0B	01	0C	03	00	04	01	03	0B	01	0C	03	00									
368.375	0E	01	0C	0C	01	0C	03	00	0E	01	01	0B	01	0C	03	00	06	01	03	0B	01	0C	03	00									
368.400	00	02	0C	0C	01	0C	03	00	00	02	01	0B	01	0C	03	00	08	01	03	0B	01	0C	03	00									
368.425	02	02	0C	0C	01	0C	03	00	02	02	01	0B	01	0C	03	00	0A	01	03	0B	01	0C	03	00									
368.450	04	02	0C	0C	01	0C	03	00	04	02	01	0B	01	0C	03	00	0C	01	03	0B	01	0C	03	00									
368.475	06	02	0C	0C	01	0C	03	00	06	02	01	0B	01	0C	03	00	0E	01	03	0B	01	0C	03	00									

F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM						
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7						
	8	9	A	B	C	D	E	8	9	A	B	C	D	E
370.000	00	02	0E	0C	01	0C	03	00	00	02	03	0B	01	0C
370.025	02	02	0E	0C	01	0C	03	00	02	02	03	0B	01	0C
370.050	04	02	0E	0C	01	0C	03	00	04	02	03	0B	01	0C
370.075	06	02	0E	0C	01	0C	03	00	06	02	03	0B	01	0C
370.100	08	02	0E	0C	01	0C	03	00	08	02	03	0B	01	0C
370.125	0A	02	0E	0C	01	0C	03	00	0A	02	03	0B	01	0C
370.150	0C	02	0E	0C	01	0C	03	00	0C	02	03	0B	01	0C
370.175	0E	02	0E	0C	01	0C	03	00	0E	02	03	0B	01	0C
370.200	00	03	0E	0C	01	0C	03	00	00	03	03	0B	01	0C
370.225	02	03	0E	0C	01	0C	03	00	02	03	03	0B	01	0C
370.250	04	03	0E	0C	01	0C	03	00	04	03	03	0B	01	0C
370.275	06	03	0E	0C	01	0C	03	00	06	03	03	0B	01	0C
370.300	08	03	0E	0C	01	0C	03	00	08	03	03	0B	01	0C
370.325	0A	03	0E	0C	01	0C	03	00	0A	03	03	0B	01	0C
370.350	0C	03	0E	0C	01	0C	03	00	0C	03	03	0B	01	0C
370.375	0E	03	0E	0C	01	0C	03	00	0E	03	03	0B	01	0C
370.400	00	04	0F	0C	01	0C	03	00	00	04	04	0B	01	0C
370.425	02	04	0F	0C	01	0C	03	00	02	04	04	0B	01	0C
370.450	04	04	0F	0C	01	0C	03	00	04	04	04	0B	01	0C
370.475	06	04	0F	0C	01	0C	03	00	06	04	04	0B	01	0C
370.500	08	04	0F	0C	01	0C	03	00	08	04	04	0B	01	0C
370.525	0A	04	0F	0C	01	0C	03	00	0A	04	04	0B	01	0C
370.550	0C	04	0F	0C	01	0C	03	00	0C	04	04	0B	01	0C
370.575	0E	04	0F	0C	01	0C	03	00	0E	04	04	0B	01	0C
370.600	00	05	0F	0C	01	0C	03	00	00	05	05	0B	01	0C
370.625	02	05	0F	0C	01	0C	03	00	02	05	05	0B	01	0C
370.650	04	05	0F	0C	01	0C	03	00	04	05	05	0B	01	0C
370.675	06	05	0F	0C	01	0C	03	00	06	05	05	0B	01	0C
370.700	08	05	0F	0C	01	0C	03	00	08	05	05	0B	01	0C
370.725	0A	05	0F	0C	01	0C	03	00	0A	05	05	0B	01	0C
370.750	0C	05	0F	0C	01	0C	03	00	0C	05	05	0B	01	0C
370.775	0E	05	0F	0C	01	0C	03	00	0E	05	05	0B	01	0C
370.800	00	06	0F	0C	01	0C	03	00	00	06	06	0B	01	0C
370.825	02	06	0F	0C	01	0C	03	00	02	06	06	0B	01	0C
370.850	04	06	0F	0C	01	0C	03	00	04	06	06	0B	01	0C
370.875	06	06	0F	0C	01	0C	03	00	06	06	06	0B	01	0C
370.900	08	06	0F	0C	01	0C	03	00	08	06	06	0B	01	0C
370.925	0A	06	0F	0C	01	0C	03	00	0A	06	06	0B	01	0C
370.950	0C	06	0F	0C	01	0C	03	00	0C	06	06	0B	01	0C
370.975	0E	06	0F	0C	01	0C	03	00	0E	06	06	0B	01	0C
371.000	00	07	0F	0C	01	0C	03	00	00	07	07	0B	01	0C
371.025	02	07	0F	0C	01	0C	03	00	02	07	07	0B	01	0C
371.050	04	07	0F	0C	01	0C	03	00	04	07	07	0B	01	0C
371.075	06	07	0F	0C	01	0C	03	00	06	07	07	0B	01	0C
371.100	08	07	0F	0C	01	0C	03	00	08	07	07	0B	01	0C
371.125	0A	07	0F	0C	01	0C	03	00	0A	07	07	0B	01	0C
371.150	0C	07	0F	0C	01	0C	03	00	0C	07	07	0B	01	0C
371.175	0E	07	0F	0C	01	0C	03	00	0E	07	07	0B	01	0C
371.200	00	08	0F	0C	01	0C	03	00	00	08	08	0B	01	0C
371.225	02	08	0F	0C	01	0C	03	00	02	08	08	0B	01	0C
371.250	04	08	0F	0C	01	0C	03	00	04	08	08	0B	01	0C
371.275	06	08	0F	0C	01	0C	03	00	06	08	08	0B	01	0C
371.300	08	08	0F	0C	01	0C	03	00	08	08	08	0B	01	0C
371.325	0A	08	0F	0C	01	0C	03	00	0A	08	08	0B	01	0C
371.350	0C	08	0F	0C	01	0C	03	00	0C	08	08	0B	01	0C
371.375	0E	08	0F	0C	01	0C	03	00	0E	08	08	0B	01	0C
371.400	00	09	0F	0C	01	0C	03	00	00	09	09	0B	01	0C
371.425	02	09	0F	0C	01	0C	03	00	02	09	09	0B	01	0C
371.450	04	09	0F	0C	01	0C	03	00	04	09	09	0B	01	0C
371.475	06	09	0F	0C	01	0C	03	00	06	09	09	0B	01	0C

***B	UHF TX PROGRAM							UHF RX PROGRAM								
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7
373.000	00	01	02	0D	01	0C	03	00	00	01	07	0B	01	0C	03	00
373.025	02	01	02	0D	01	0C	03	00	02	01	07	0B	01	0C	03	00
373.050	04	01	02	0D	01	0C	03	00	04	01	07	0B	01	0C	03	00
373.075	06	01	02	0D	01	0C	03	00	06	01	07	0B	01	0C	03	00
373.100	08	01	02	0D	01	0C	03	00	08	01	07	0B	01	0C	03	00
373.125	0A	01	02	0D	01	0C	03	00	0A	01	07	0B	01	0C	03	00
373.150	0C	01	02	0D	01	0C	03	00	0C	01	07	0B	01	0C	03	00
373.175	0E	01	02	0D	01	0C	03	00	0E	01	07	0B	01	0C	03	00
373.200	00	02	00	01	0C	03	00	00	02	07	0B	01	0C	03	00	00
373.225	02	02	00	01	0C	03	00	02	02	07	0B	01	0C	03	00	00
373.250	04	02	00	01	0C	03	00	04	02	07	0B	01	0C	03	00	00
373.275	06	02	00	01	0C	03	00	06	02	07	0B	01	0C	03	00	00
373.300	08	02	00	01	0C	03	00	08	02	07	0B	01	0C	03	00	00
373.325	0A	02	00	01	0C	03	00	0A	02	07	0B	01	0C	03	00	00
373.350	0C	02	00	01	0C	03	00	0C	02	07	0B	01	0C	03	00	00
373.375	0E	02	00	01	0C	03	00	0E	02	07	0B	01	0C	03	00	00
373.400	00	03	02	0D	01	0C	03	00	00	03	07	0B	01	0C	03	00
373.425	02	03	02	0D	01	0C	03	00	02	03	07	0B	01	0C	03	00
373.450	04	03	02	0D	01	0C	03	00	04	03	07	0B	01	0C	03	00
373.475	06	03	02	0D	01	0C	03	00	06	03	07	0B	01	0C	03	00
373.500	08	03	02	0D	01	0C	03	00	08	03	07	0B	01	0C	03	00
373.525	0A	03	02	0D	01	0C	03	00	0A	03	07	0B	01	0C	03	00
373.550	0C	03	02	0D	01	0C	03	00	0C	03	07	0B	01	0C	03	00
373.575	0E	03	02	0D	01	0C	03	00	0E	03	07	0B	01	0C	03	00
373.600	00	00	03	00	01	0C	03	00	00	00	08	08	01	0C	03	00
373.625	02	00	03	00	01	0C	03	00	02	00	08	08	01	0C	03	00
373.650	04	00	03	00	01	0C	03	00	04	00	08	08	01	0C	03	00
373.675	06	00	03	00	01	0C	03	00	06	00	08	08	01	0C	03	00
373.700	08	00	03	00	01	0C	03	00	08	00	08	08	01	0C	03	00
373.725	0A	00	03	00	01	0C	03	00	0A	00	08	08	01	0C	03	00
373.750	0C	00	03	00	01	0C	03	00	0C	00	08	08	01	0C	03	00
373.775	0E	00	03	00	01	0C	03	00	0E	00	08	08	01	0C	03	00
373.800	00	01	03	00	01	0C	03	00	00	01	08	08	01	0C	03	00
373.825	02	01	03	00	01	0C	03	00	02	01	08	08	01	0C	03	00
373.850	04	01	03	00	01	0C	03	00	04	01	08	08	01	0C	03	00
373.875	06	01	03	00	01	0C	03	00	06	01	08	08	01	0C	03	00
373.900	08	01	03	00	01	0C	03	00	08	01	08	08	01	0C	03	00
373.925	0A	01	03	00	01	0C	03	00	0A	01	08	08	01	0C	03	00
373.950	0C	01	03	00	01	0C	03	00	0C	01	08	08	01	0C	03	00
373.975	0E	01	03	00	01	0C	03	00	0E	01	08	08	01	0C	03	00
374.000	00	02	03	00	01	0C	03	00	00	02	08	08	01	0C	03	00
374.025	02	02	03	00	01	0C	03	00	02	02	08	08	01	0C	03	00
374.050	04	02	03	00	01	0C	03	00	04	02	08	08	01	0C	03	00
374.075	06	02	03	00	01	0C	03	00	06	02	08	08	01	0C	03	00
374.100	08	02	03	00	01	0C	03	00	08	02	08	08	01	0C	03	00
374.125	0A	02	03	00	01	0C	03	00	0A	02	08	08	01	0C	03	00
374.150	0C	02	03	00	01	0C	03	00	0C	02	08	08	01	0C	03	00
374.175	0E	02	03	00	01	0C	03	00	0E	02	08	08	01	0C	03	00
374.200	00	03	03	00	01	0C	03	00	00	03	08	08	01	0C	03	00
374.225	02	03	03	00	01	0C	03	00	02	03	08	08	01	0C	03	00
374.250	04	03	03	00	01	0C	03	00	04	03	08	08	01	0C	03	00
374.275	06	03	03	00	01	0C	03	00	06	03	08	08	01	0C	03	00
374.300	08	03	03	00	01	0C	03	00	08	03	08	08	01	0C	03	00
374.325	0A	03	03	00	01	0C	03	00	0A	03	08	08	01	0C	03	00
374.350	0C	03	03	00	01	0C	03	00	0C	03	08	08	01	0C	03	00
374.375	0E	03	03	00	01	0C	03	00	0E	03	08	08	01	0C	03	00
374.400	00	00	04	00	01	0C	03	00	00	00	09	08	01	0C	03	00
374.425	02	00	04	00	01	0C	03	00	02	00	09	08	01	0C	03	00
374.450	04	00	04	00	01	0C	03	00	04	00	09	08	01	0C	03	00
374.475	06	00	04	00	01	0C	03	00	06	00	09	08	01	0C	03	00

***B	UHF TX PROGRAM										UHF RX PROGRAM													
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7													
	F (MHz) 8 9 A B C D E F										0 1 2 3 4 5 6 7													
376.000	00	00	06	01	01	0C	03	00	00	00	08	06	01	0C	03	00	00	00	08	06	01	0C	03	00
376.025	02	00	06	00	04	0C	03	00	02	00	08	06	01	0C	03	00	0A	03	0C	08	01	0C	03	00
376.050	04	00	06	00	01	0C	03	00	04	00	08	08	01	0C	03	00	06	03	0C	08	01	0C	03	00
376.075	06	00	06	00	01	0C	03	00	06	00	08	08	01	0C	03	00	0E	03	0C	08	01	0C	03	00
376.100	08	00	06	00	01	0C	03	00	08	00	08	08	01	0C	03	00	00	00	0D	08	01	0C	03	00
376.125	0A	00	06	00	01	0C	03	00	0A	00	08	08	01	0C	03	00	02	00	0D	08	01	0C	03	00
376.150	0C	00	06	00	01	0C	03	00	0C	00	08	08	01	0C	03	00	04	00	0D	08	01	0C	03	00
376.175	0E	00	06	00	01	0C	03	00	0E	00	08	08	01	0C	03	00	06	00	0D	08	01	0C	03	00
376.200	00	01	06	00	01	0C	03	00	00	01	08	08	01	0C	03	00	08	00	0D	08	01	0C	03	00
376.225	02	01	06	00	01	0C	03	00	02	01	08	08	01	0C	03	00	0A	00	0D	08	01	0C	03	00
376.250	04	01	06	00	01	0C	03	00	04	01	08	08	01	0C	03	00	0C	00	0D	08	01	0C	03	00
376.275	06	01	06	00	01	0C	03	00	06	01	08	08	01	0C	03	00	0E	00	0D	08	01	0C	03	00
376.300	08	01	06	00	01	0C	03	00	08	01	08	08	01	0C	03	00	00	01	0D	08	01	0C	03	00
376.325	0A	01	06	00	01	0C	03	00	0A	01	08	08	01	0C	03	00	02	01	0D	08	01	0C	03	00
376.350	0C	01	06	00	01	0C	03	00	0C	01	08	08	01	0C	03	00	04	01	0D	08	01	0C	03	00
376.375	0E	01	06	00	01	0C	03	00	0E	01	08	08	01	0C	03	00	06	01	0D	08	01	0C	03	00
376.400	00	02	06	00	01	0C	03	00	00	02	08	08	01	0C	03	00	08	01	0D	08	01	0C	03	00
376.425	02	02	06	00	01	0C	03	00	02	02	08	08	01	0C	03	00	0A	01	0D	08	01	0C	03	00
376.450	04	02	06	00	01	0C	03	00	04	02	08	08	01	0C	03	00	0C	01	0D	08	01	0C	03	00
376.475	06	02	06	00	01	0C	03	00	06	02	08	08	01	0C	03	00	0E	01	0D	08	01	0C	03	00
376.500	08	02	06	00	01	0C	03	00	08	02	08	08	01	0C	03	00	00	02	0D	08	01	0C	03	00
376.525	0A	02	06	00	01	0C	03	00	0A	02	08	08	01	0C	03	00	02	02	0D	08	01	0C	03	00
376.550	0C	02	06	00	01	0C	03	00	0C	02	08	08	01	0C	03	00	04	02	0D	08	01	0C	03	00
376.575	0E	02	06	00	01	0C	03	00	0E	02	08	08	01	0C	03	00	06	02	0D	08	01	0C	03	00
376.600	00	03	06	00	01	0C	03	00	00	03	08	08	01	0C	03	00	08	02	0D	08	01	0C	03	00
376.625	02	03	06	00	01	0C	03	00	02	03	08	08	01	0C	03	00	0A	02	0D	08	01	0C	03	00
376.650	04	03	06	00	01	0C	03	00	04	03	08	08	01	0C	03	00	0C	02	0D	08	01	0C	03	00
376.675	06	03	06	00	01	0C	03	00	06	03	08	08	01	0C	03	00	06	03	0D	08	01	0C	03	00
376.700	08	03	06	00	01	0C	03	00	08	03	08	08	01	0C	03	00	00	03	0D	08	01	0C	03	00
376.725	0A	03	06	00	01	0C	03	00	0A	03	08	08	01	0C	03	00	02	03	0D	08	01	0C	03	00
376.750	0C	03	06	00	01	0C	03	00	0C	03	08	08	01	0C	03	00	04	03	0D	08	01	0C	03	00
376.775	0E	03	06	00	01	0C	03	00	0E	03	08	08	01	0C	03	00	06	03	0D	08	01	0C	03	00
376.800	00	07	00	01	0C	03	00	00	00	0C	08	01	0C	03	00	08	03	0D	08	01	0C	03	00	00
376.825	02	07	00	01	0C	03	00	02	00	0C	08	01	0C	03	00	0A	03	0D	08	01	0C	03	00	00
376.850	04	07	00	01	0C	03	00	04	00	0C	08	01	0C	03	00	0C	03	0D	08	01	0C	03	00	00
376.875	06	07	00	01	0C	03	00	06	00	0C	08	01	0C	03	00	0E	03	0D	08	01	0C	03	00	00
376.900	08	07	00	01	0C	03	00	08	00	0C	08	01	0C	03	00	00	00	0E	08	01	0C	03	00	00
376.925	0A	07	00	01	0C	03	00	0A	00	0C	08	01	0C	03	00	0A	00	0E	08	01	0C	03	00	00
376.950	0C	07	00	01	0C	03	00	0C	00	0C	08	01	0C	03	00	0C	00	0E	08	01	0C	03	00	00
376.975	0E	07	00	01	0C	03	00	0E	00	0C	08	01	0C	03	00	0E	00	0E	08	01	0C	03	00	00
377.000	00	01	07	00	01	0C	03	00	00	01	0C	08	01	0C	03	00	08	00	0E	08	01	0C	03	00
377.025	02	01	07	00	01	0C	03	00	02	01	0C	08	01	0C	03	00	0A	00	0E	08	01	0C	03	00
377.050	04	01	07	00	01	0C	03	00	04	01	0C	08	01	0C	03	00	0C	00	0E	08	01	0C	03	00
377.075	06	00	06	00	01	0C	03	00	06	00	08	08	01	0C	03	00	0E	00	0E	08	01	0C	03	00
377.100	08	01	07	00	01	0C	03	00	08	01	0C	08	01	0C	03	00	00	00	0E	08	01	0C	03	00
377.125	0A	01	07	00	01	0C	03	00	0A	01	0C	08	01	0C	03	00	02	01	0E	08	01	0C	03	00
377.150	0C	01	07	00	01	0C	03	00	0C	01	0C	08	01	0C	03	00	04	01	0E	08	01	0C	03	00
377.175	0E	01	07	00	01	0C	03	00	0E	01	0C	08	01	0C	03	00	06	01	0E	08	01	0C	03	00
377.200	00	02	07	00	01	0C	03	00	00	02	0C	08	01	0C	03	00	08	01	0E	08	01	0C	03	00
377.225	02	02	07	00	01	0C	03	00	02	02	0C	08	01	0C	03	00	0A	01	0E	08	01	0C	03	00
377.250	04	02	07	00	01	0C	03	00	04	02	0C	08	01	0C	03	00	0C	01	0E	08	01	0C	03	00
377.275	06	02	07	00	01	0C	03	00	06	02	0C	08	01	0C	03	00	0E	01	0E	08	01	0C	03	00
377.300	08	02	07	00	01	0C	03	00	08	02	0C	08	01	0C	03	00	00	02	0E	08	01	0C	03	00
377.325	0A	02	07	00	01	0C	03	00	0A	02	0C	08	01	0C	03	00	02	02	0E	08	01	0C	03	00
377.350	0C	02	07	00	01	0C	03	00	0C	02	0C	08	01	0C	03	00	04	02	0E	08	01	0C	03	00
377.375	0E	02	07	00	01	0C	03	00	0E	02	0C	08	01	0C	03	00	06	02	0E	08	01	0C	03	00
377.400	00	03	07	00	01	0C	03	00	00	03	0C	08	01	0C	03	00	08	02	0E	08	01	0C	03	00
377.425	02	03	07	00	01	0C	03	00	02	03	0C	08	01	0C	03	00	0A	02	0E	08	01	0C	03	00
377.450	04	03	07	00	01	0C	03	00	04	03	0C	08	01	0C	03	00	0C	02	0E	08	01	0C	03	00
377.475	06	03	07	00	01	0C	03	00	06	03	0C	08	01	0C	03	00	0E	02	0E	08	01	0C	03	00

ISSUE DATE: 8/01/91

***C	UHF TX PROGRAM										UHF RX PROGRAM													
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7													
	F (MHz) 8 9 A B C D E F										0 1 2 3 4 5 6 7													
406.000	00	02	08	0F	01	0C	03	00	00	02	00	0E	01	0C	03	00	08	01	02	0E	01	0C	03	00
406.025	02	02	08	0F	01	0C	03	00	02	02	00	0E	01	0C	03	00	0A	01	02	0E	01	0C	03	00
406.050	04	02	08	0F	01	0C	03	00	04	02	00	0E	01	0C	03	00	0C	01	02	0E	01	0C	03	00
406.075	06	02	08	0F	01	0C	03	00	06	02	00	0E	01	0C	03	00	0E	01	02	0E	01	0C	03	00
406.100	08	02	08	0F	01	0C	03	00	08	02	00	0E	01	0C	03	00	00	02	0E	01	0C	03	00	00
406.125	0A	02	08	0F	01	0C	03	00	0A	02	00	0E	01	0C	03	00	02	02	0E	01	0C	03	00	02
406.150	0C	02	08	0F	01	0C	03	00	0C	02	00	0E	01	0C	03	00	04	02	0E	01	0C	03	00	04
406.175	0E	02	08	0F	01	0C	03	00	0E	02	00	0E	01	0C	03	00	06	02	0E	01	0C	03	00	06
406.200	00	03	08	0F	01	0C	03	00	00	03	00	0E	01	0C	03	00	08	02	0E	01	0C	03	00	08
406.225	02	03	08	0F	01	0C	03	00	02	03	00	0E	01	0C	03	00	0A	02	0E	01	0C	03	00	0A
406.250	04	03	08	0F	01	0C	03	00	04	03	00	0E	01	0C	03	00	0C	02	0E	01	0C	03	00	0C
406.275	06	03	08	0F	01	0C	03	00	06	03	00	0E	01	0C	03	00	0E	02	0E	01	0C	03	00	0E
406.300	08	03	08	0F	01	0C	03	00	08	03	00	0E	01	0C	03	00	00	03	0E	01	0C	03	00	00
406.325	0A	03	08	0F	01	0C	03	00	0A	03	00	0E	01	0C	03	00	02	02	0E	01	0C	03	00	02
406.350	0C	03	08	0F	01	0C	03	00	0C	03	00	0E	01	0C	03	00	04	03	0E	01	0C	03	00	04
406.375	0E	03	08	0F	01	0C	03	00	0E	03	00	0E	01	0C	03	00	06	03	0E	01	0C	03	00	06
406.400	00	0C	0F	01	0C	03	00	00	00	01	0E	01	0C	03	00	08	03	0E	01	0C	03	00	08	
406.425	02	0C	0F	01	0C	03	00	0A	02	01	0E	01	0C	03	00	0C	03	0E	01	0C	03	00	0C	
406.450	04	02	0C	0F	01	0C	03	00	0C	02	01	0E	01	0C	03	00	0E	03	0E	01	0C	03	00	0E
406.475	06	02	0C	0F	01	0C	03	00	0E	02	01	0E	01	0C	03	00	00	00	03	0E	01	0C	03	00
406.500	08	02	0C	0F	01	0C	03	00	08	02	01	0E	01	0C	03	00	02	00	03	0E	01	0C	03	00
406.525	0A	02	0C	0F	01	0C	03	00	0A	02	01	0E	01	0C	03	00	04	00	03	0E	01	0C	03	00
406.550	0C	02	0C	0F	01	0C	03	00	0C	02	01	0E	01	0C	03	00	06	00	03	0E	01	0C	03	00
406.575	0E	02	0C	0F	01	0C	03	00	0E	02	01	0E	01	0C	03	00	08	00	03	0E	01	0C	03	00
406.600	00	03	0C	0F	01	0C	03	00	00	03	01	0E	01	0C	03	00	00	00	03	0E	01	0C	03	00
406.625	02	03	0C	0F	01	0C	03	00	02	03	01	0E	01	0C	03	00	02	01	03	0E	01	0C	03	00
406.650	04	03	0C	0F	01	0C	03	00	04	03	01	0E	01	0C	03	00	04	01	03	0E	01	0C	03	00
406.675	06	03	0C	0F	01	0C	03	00	06	03	01	0E	01	0C	03	00	06	01	03	0E	01	0C	03	00
406.700	08	03	0C	0F	01	0C	03	00	08	03	01	0E	01	0C	03	00	08	00	03	0E	01	0C	03	00
406.725	0A	03	0C	0F	01	0C	03	00	0A	03	01	0E	01	0C	03	00	00	00	03	0E	01	0C	03	00
406.750	0C	03	0C	0F	01	0C	03	00	0C	03	01	0E	01	0C	03	00	02	01	03	0E	01	0C	03	00
406.775	0E	03	0C	0F	01	0C	03	00	0E	03	01	0E	01	0C	03	00	04	01	03	0E	01	0C	03	00
406.800	00	04	0C	0F	01	0C	03	00	00	04	01	0E	01	0C	03	00	06	01	03	0E	01	0C	03	00
406.825	02	04	0C	0F	01	0C	03	00	02	04	01	0E	01	0C	03	00	08	01	03	0E	01	0C	03	00
406.850	04	04	0C	0F	01	0C	03	00	04	04	01	0E	01	0C	03	00	00	02	04	0E	01	0C	03	00
406.875	06	04	0C	0F	01	0C	03	00	06	04	01	0E	01	0C	03	00	02	00	04	0E	01	0C	03	00
406.900	08	04	0C	0F	01	0C	03	00	08	04	01	0E	01	0C	03	00	04	00	04	0E	01	0C	03	00
406.925	0A	04	0C	0F	01	0C	03	00	0A	04	01	0E	01	0C	03	00	06	00	04	0E	01	0C	03	00
406.950	0C	04	0C	0F	01	0C	03	00	0C	04	01	0E	01	0C	03	00	08	00	04	0E	01	0C	03	00
406.975	0E	04	0C	0F	01	0C	03	00	0E	04	01	0E	01	0C	03	00	00	00	04	0E	01	0C	03	00

***C F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM						
	0	1	2	3	4	5	6	0	1	2	3	4	5	6
	8	9	A	B	C	D	E	8	9	A	B	C	D	E
409.000	00	01	0F	0F	01	0C	03	00	00	01	04	0E	01	0C
409.025	02	01	0F	0F	01	0C	03	00	02	01	04	0E	01	0C
409.050	04	01	0F	0F	01	0C	03	00	04	01	04	0E	01	0C
409.075	06	01	0F	0F	01	0C	03	00	06	01	04	0E	01	0C
409.100	08	01	0F	0F	01	0C	03	00	08	01	04	0E	01	0C
409.125	0A	01	0F	0F	01	0C	03	00	0A	01	04	0E	01	0C
409.150	0C	01	0F	0F	01	0C	03	00	0C	01	04	0E	01	0C
409.175	0E	01	0F	0F	01	0C	03	00	0E	01	04	0E	01	0C
409.200	00	02	0F	0F	01	0C	03	00	00	02	04	0E	01	0C
409.225	02	02	0F	0F	01	0C	03	00	02	02	04	0E	01	0C
409.250	04	02	0F	0F	01	0C	03	00	04	02	04	0E	01	0C
409.275	06	02	0F	0F	01	0C	03	00	06	02	04	0E	01	0C
409.300	08	02	0F	0F	01	0C	03	00	08	02	04	0E	01	0C
409.325	0A	02	0F	0F	01	0C	03	00	0A	02	04	0E	01	0C
409.350	0C	02	0F	0F	01	0C	03	00	0C	02	04	0E	01	0C
409.375	0E	02	0F	0F	01	0C	03	00	0E	02	04	0E	01	0C
409.400	00	03	0F	0F	01	0C	03	00	00	03	04	0E	01	0C
409.425	02	03	0F	0F	01	0C	03	00	02	03	04	0E	01	0C
409.450	04	03	0F	0F	01	0C	03	00	04	03	04	0E	01	0C
409.475	06	03	0F	0F	01	0C	03	00	06	03	04	0E	01	0C
409.500	08	03	0F	0F	01	0C	03	00	08	03	04	0E	01	0C
409.525	0A	03	0F	0F	01	0C	03	00	0A	03	04	0E	01	0C
409.550	0C	03	0F	0F	01	0C	03	00	0C	03	04	0E	01	0C
409.575	0E	03	0F	0F	01	0C	03	00	0E	03	04	0E	01	0C
409.600	00	00	00	00	02	0C	03	00	00	00	05	0E	01	0C
409.625	02	00	00	00	02	0C	03	00	02	00	05	0E	01	0C
409.650	04	00	00	00	02	0C	03	00	04	00	05	0E	01	0C
409.675	06	00	00	00	02	0C	03	00	06	00	05	0E	01	0C
409.700	08	00	00	00	02	0C	03	00	08	00	05	0E	01	0C
409.725	0A	00	00	00	02	0C	03	00	0A	00	05	0E	01	0C
409.750	0C	00	00	00	02	0C	03	00	0C	00	05	0E	01	0C
409.775	0E	00	00	00	02	0C	03	00	0E	00	05	0E	01	0C
409.800	00	01	00	00	02	0C	03	00	00	01	05	0E	01	0C
409.825	02	01	00	00	02	0C	03	00	02	01	05	0E	01	0C
409.850	04	01	00	00	02	0C	03	00	04	01	05	0E	01	0C
409.875	06	01	00	00	02	0C	03	00	06	01	05	0E	01	0C
409.900	08	01	00	00	02	0C	03	00	08	01	05	0E	01	0C
409.925	0A	01	00	00	02	0C	03	00	0A	01	05	0E	01	0C
409.950	0C	01	00	00	02	0C	03	00	0C	01	05	0E	01	0C
409.975	0E	01	00	00	02	0C	03	00	0E	01	05	0E	01	0C
410.000	00	02	00	00	02	0C	03	00	00	02	05	0E	01	0C
410.025	02	02	00	00	02	0C	03	00	02	02	05	0E	01	0C
410.050	04	02	00	00	02	0C	03	00	04	02	05	0E	01	0C
410.075	06	02	00	00	02	0C	03	00	06	02	05	0E	01	0C
410.100	08	02	00	00	02	0C	03	00	08	02	05	0E	01	0C
410.125	0A	02	00	00	02	0C	03	00	0A	02	05	0E	01	0C
410.150	0C	02	00	00	02	0C	03	00	0C	02	05	0E	01	0C
410.175	0E	02	00	00	02	0C	03	00	0E	02	05	0E	01	0C
410.200	00	03	00	00	02	0C	03	00	00	03	05	0E	01	0C
410.225	02	03	00	00	02	0C	03	00	02	03	05	0E	01	0C
410.250	04	03	00	00	02	0C	03	00	04	03	05	0E	01	0C
410.275	06	03	00	00	02	0C	03	00	06	03	05	0E	01	0C
410.300	08	03	00	00	02	0C	03	00	08	03	05	0E	01	0C
410.325	0A	03	00	00	02	0C	03	00	0A	03	05	0E	01	0C
410.350	0C	03	00	00	02	0C	03	00	0C	03	05	0E	01	0C
410.375	0E	03	00	00	02	0C	03	00	0E	03	05	0E	01	0C
410.400	00	04	00	01	00	02	0C	03	00	00	06	0E	01	0C
410.425	02	04	00	01	00	02	0C	03	00	02	06	0E	01	0C
410.450	04	04	00	01	00	02	0C	03	00	04	06	0E	01	0C
410.475	06	04	00	01	00	02	0C	03	00	06	06	0E	01	0C

***C	UHF TX PROGRAM							UHF RX PROGRAM								
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
412.000	00	00	03	00	02	0C	03	00	00	08	0E	01	0C	03	00	00
412.025	02	00	03	00	02	0C	03	00	02	00	08	0E	01	0C	03	00
412.050	04	00	03	00	02	0C	03	00	04	00	08	0E	01	0C	03	00
412.075	06	00	03	00	02	0C	03	00	06	00	08	0E	01	0C	03	00
412.100	08	00	03	00	02	0C	03	00	08	00	08	0E	01	0C	03	00
412.125	0A	00	03	00	02	0C	03	00	0A	00	08	0E	01	0C	03	00
412.150	0C	00	03	00	02	0C	03	00	0C	00	08	0E	01	0C	03	00
412.175	0E	00	03	00	02	0C	03	00	0E	00	08	0E	01	0C	03	00
412.200	00	01	03	00	02	0C	03	00	00	01	08	0E	01	0C	03	00
412.225	02	01	03	00	02	0C	03	00	02	01	08	0E	01	0C	03	00
412.250	04	01	03	00	02	0C	03	00	04	01	08	0E	01	0C	03	00
412.275	06	01	03	00	02	0C	03	00	06	01	08	0E	01	0C	03	00
412.300	08	01	03	00	02	0C	03	00	08	01	08	0E	01	0C	03	00
412.325	0A	01	03	00	02	0C	03	00	0A	01	08	0E	01	0C	03	00
412.350	0C	01	03	00	02	0C	03	00	0C	01	08	0E	01	0C	03	00
412.375	0E	01	03	00	02	0C	03	00	0E	01	08	0E	01	0C	03	00
412.400	00	02	03	00	02	0C	03	00	00	02	08	0E	01	0C	03	00
412.425	02	02	03	00	02	0C	03	00	02	02	08	0E	01	0C	03	00
412.450	04	02	03	00	02	0C	03	00	04	02	08	0E	01	0C	03	00
412.475	06	02	03	00	02	0C	03	00	06	02	08	0E	01	0C	03	00
412.500	08	02	03	00	02	0C	03	00	08	02	08	0E	01	0C	03	00
412.525	0A	02	03	00	02	0C	03	00	0A	02	08	0E	01	0C	03	00
412.550	0C	02	03	00	02	0C	03	00	0C	02	08	0E	01	0C	03	00
412.575	0E	02	03	00	02	0C	03	00	0E	02	08	0E	01	0C	03	00
412.600	00	03	03	00	02	0C	03	00	00	03	08	0E	01	0C	03	00
412.625	02	03	03	00	02	0C	03	00	02	03	08	0E	01	0C	03	00
412.650	04	03	03	00	02	0C	03	00	04	03	08	0E	01	0C	03	00
412.675	06	03	03	00	02	0C	03	00	06	03	08	0E	01	0C	03	00
412.700	08	03	03	00	02	0C	03	00	08	03	08	0E	01	0C	03	00
412.725	0A	03	03	00	02	0C	03	00	0A	03	08	0E	01	0C	03	00
412.750	0C	03	03	00	02	0C	03	00	0C	03	08	0E	01	0C	03	00
412.775	0E	03	03	00	02	0C	03	00	0E	03	08	0E	01	0C	03	00
412.800	00	04	00	02	0C	03	00	00	00	09	0E	01	0C	03	00	00
412.825	02	04	00	02	0C	03	00	02	00	09	0E	01	0C	03	00	00
412.850	04	04	00	02	0C	03	00	04	00	09	0E	01	0C	03	00	00
412.875	06	04	00	02	0C	03	00	06	00	09	0E	01	0C	03	00	00
412.900	08	04	00	02	0C	03	00	08	00	09	0E	01	0C	03	00	00
412.925	0A	04	00	02	0C	03	00	0A	00	09	0E	01	0C	03	00	00
412.950	0C	04	00	02	0C	03	00	0C	00	09	0E	01	0C	03	00	00
412.975	0E	04	00	02	0C	03	00	0E	00	09	0E	01	0C	03	00	00
413.000	00	04	00	02	0C	03	00	00	01	09	0E	01	0C	03	00	00
413.025	02	04	00	02	0C	03	00	02	01	09	0E	01	0C	03	00	00
413.050	04	04	00	02	0C	03	00	04	01	09	0E	01	0C	03	00	00
413.075	06	04	00	02	0C	03	00	06	01	09	0E	01	0C	03	00	00
413.100	08	04	00	02	0C	03	00	08	01	09	0E	01	0C	03	00	00
413.125	0A	04	00	02	0C	03	00	0A	01	09	0E	01	0C	03	00	00
413.150	0C	04	00	02	0C	03	00	0C	01	09	0E	01	0C	03	00	00
413.175	0E	04	00	02	0C	03	00	0E	01	09	0E	01	0C	03	00	00
413.200	00	04	00	02	0C	03	00	00	02	09	0E	01	0C	03	00	00
413.225	02	04	00	02	0C	03	00	02	02	09	0E	01	0C	03	00	00
413.250	04	02	04	00	02	0C	03	00	04	02	09	0E	01	0C	03	00
413.275	06	02	04	00	02	0C	03	00	06	02	09	0E	01	0C	03	00
413.300	08	02	04	00	02	0C	03	00	08	02	09	0E	01	0C	03	00
413.325	0A	02	04	00	02	0C	03	00	0A	02	09	0E	01	0C	03	00
413.350	0C	02	04	00	02	0C	03	00	0C	02	09	0E	01	0C	03	00
413.375	0E	02	04	00	02	0C	03	00	0E	02	09	0E	01	0C	03	00
413.400	00	03	04	00	02	0C	03	00	00	03	09	0E	01	0C	03	00
413.425	02	03	04	00	02	0C	03	00	02	03	09	0E	01	0C	03	00
413.450	04	03	04	00	02	0C	03	00	04	03	09	0E	01	0C	03	00
413.475	06	03	04	00	02	0C	03	00	06	03	09	0E	01	0C	03	00

F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM								
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
415.000	00	03	06	00	02	0C	03	00	00	03	0B	0E	01	0C	03	00
415.025	02	03	06	00	02	0C	03	00	04	03	0B	0E	01	0C	03	00
415.050	04	03	06	00	02	0C	03	00	06	03	0B	0E	01	0C	03	00
415.075	06	03	06	00	02	0C	03	00	08	03	0B	0E	01	0C	03	00
415.100	08	03	06	00	02	0C	03	00	0A	03	0B	0E	01	0C	03	00
415.125	0A	03	06	00	02	0C	03	00	0C	03	0B	0E	01	0C	03	00
415.150	0C	03	06	00	02	0C	03	00	0E	03	0B	0E	01	0C	03	00
415.175	0E	03	06	00	02	0C	03	00	00	00	0C	0E	01	0C	03	00
415.200	00	07	00	00	02	0C	03	00	02	00	0C	0E	01	0C	03	00
415.225	02	00	07	00	00	02	0C	03	04	00	0C	0E	01	0C	03	00
415.250	04	00	07	00	00	02	0C	03	06	00	0C	0E	01	0C	03	00
415.275	06	00	07	00	00	02	0C	03	08	00	0C	0E	01	0C	03	00
415.300	08	00	07	00	00	02	0C	03	0A	00	0C	0E	01	0C	03	00
415.325	0A	00	07	00	00	02	0C	03	0C	00	0C	0E	01	0C	03	00
415.350	0C	00	07	00	00	02	0C	03	0E	00	0C	0E	01	0C	03	00
415.375	0E	00	07	00	00	02	0C	03	00	01	0C	0E	01	0C	03	00
415.400	00	01	07	00	00	02	0C	03	02	01	0C	0E	01	0C	03	00
415.425	02	01	07	00	00	02	0C	03	04	02	0C	0E	01	0C	03	00
415.450	04	01	07	00	00	02	0C	03	06	04	0C	0E	01	0C	03	00
415.475	06	01	07	00	00	02	0C	03	08	06	0C	0E	01	0C	03	00
415.500	08	01	07	00	00	02	0C	03	0A	08	0C	0E	01	0C	03	00
415.525	0A	01	07	00	00	02	0C	03	0C	0A	0C	0E	01	0C	03	00
415.550	0C	01	07	00	00	02	0C	03	0E	0C	0C	0E	01	0C	03	00
415.575	0E	01	07	00	00	02	0C	03	00	02	0C	0E	01	0C	03	00
415.600	00	02	07	00	00	02	0C	03	02	02	0C	0E	01	0C	03	00
415.625	02	02	07	00	00	02	0C	03	04	04	0C	0E	01	0C	03	00
415.650	04	02	07	00	00	02	0C	03	06	06	0C	0E	01	0C	03	00
415.675	06	02	07	00	00	02	0C	03	08	08	0C	0E	01	0C	03	00
415.700	08	02	07	00	00	02	0C	03	0A	0A	0C	0E	01	0C	03	00
415.725	0A	02	07	00	00	02	0C	03	0C	0C	0C	0E	01	0C	03	00
415.750	0C	02	07	00	00	02	0C	03	0E	0E	0C	0E	01	0C	03	00
415.775	0E	02	07	00	00	02	0C	03	00	01	0C	0E	01	0C	03	00
415.800	00	03	07	00	00	02	0C	03	02	03	0C	0E	01	0C	03	00
415.825	02	03	07	00	00	02	0C	03	04	04	0C	0E	01	0C	03	00
415.850	04	03	07	00	00	02	0C	03	06	06	0C	0E	01	0C	03	00
415.875	06	03	07	00	00	02	0C	03	08	08	0C	0E	01	0C	03	00
415.900	08	03	07	00	00	02	0C	03	0A	0A	0C	0E	01	0C	03	00
415.925	0A	03	07	00	00	02	0C	03	0C	0C	0C	0E	01	0C	03	00
415.950	0C	03	07	00	00	02	0C	03	0E	0E	0C	0E	01	0C	03	00
415.975	0E	03	07	00	00	02	0C	03	00	02	0C	0E	01	0C	03	00
416.000	00	04	08	00	00	02	0C	03	02	04	0C	0E	01	0C	03	00
416.025	02	04	08	00	00	02	0C	03	04	06	0C	0E	01	0C	03	00
416.050	04	04	08	00	00	02	0C	03	06	08	0C	0E	01	0C	03	00
416.075	06	04	08	00	00	02	0C	03	08	0A	0C	0E	01	0C	03	00
416.100	08	04	08	00	00	02	0C	03	0A	0C	0C	0E	01	0C	03	00
416.125	0A	04	08	00	00	02	0C	03	0C	0E	0C	0E	01	0C	03	00
416.150	0C	04	08	00	00	02	0C	03	0E	0E	0C	0E	01	0C	03	00
416.175	0E	04	08	00	00	02	0C	03	00	01	0C	0E	01	0C	03	00
416.200	00	05	08	00	00	02	0C	03	02	02	0C	0E	01	0C	03	00
416.225	02	05	08	00	00	02	0C	03	04	04	0C	0E	01	0C	03	00
416.250	04	05	08	00	00	02	0C	03	06	06	0C	0E	01	0C	03	00
416.275	06	05	08	00	00	02	0C	03	08	08	0C	0E	01	0C	03	00
416.300	08	05	08	00	00	02	0C	03	0A	0A	0C	0E	01	0C	03	00
416.325	0A	05	08	00	00	02	0C	03	0C	0C	0C	0E	01	0C	03	00
416.350	0C	05	08	00	00	02	0C	03	0E	0E	0C	0E	01	0C	03	00
416.375	0E	05	08	00	00	02	0C	03	00	02	0C	0E	01	0C	03	00
416.400	00	06	08	00	00	02	0C	03	02	06	0C	0E	01	0C	03	00
416.425	02	06	08	00	00	02	0C	03	04	08	0C	0E	01	0C	03	00
416.450	04	06	08	00	00	02	0C	03	06	0A	0C	0E	01	0C	03	00
416.475	06	06	08	00	00	02	0C	03	08	0C	0C	0E	01	0C	03	00
416.500	08	06	08	00	00	02	0C	03	0A	0E	0C	0E	01	0C	03	00
416.525	0A	06	08	00	00	02	0C	03	0C	00	0C	0E	01	0C	03	00
416.550	0C	06	08	00	00	02	0C	03	0E	02	0C	0E	01	0C	03	00
416.575	0E	06	08	00	00	02	0C	03	00	04	0C	0E	01	0C	03	00
416.600	00	07	08	00	00	02	0C	03	02	06	0C	0E	01	0C	03	00
416.625	02	07	08	00	00	02	0C	03	04	08	0C	0E	01	0C	03	00
416.650	04	07	08	00	00	02	0C	03	06	0A	0C	0E	01	0C	03	00
416.675	06	07	08	00	00	02	0C	03	08	0C	0C	0E	01	0C	03	00
416.700	08	07	08	00	00	02	0C	03	0A	0E	0C	0E	01	0C	03	00
416.725	0A	07	08	00	00	02	0C	03	0C	00	0C	0E	01	0C	03	00
416.750	0C	07	08	00	00	02	0C	03	0E	02	0C	0E	01	0C	03	00
416.775	0E	07	08	00	00	02	0C	03	00	04	0C	0E	01	0C	03	00
416.800	00	08	08	00	00	02	0C	03	02	06	0C	0E	01	0C	03	00
416.825	02	08	08	00	00	02	0C	03	04	08	0C	0E	01	0C	03	00
416.850	04	08	08	00	00	02	0C	03	06	0A	0C	0E	01	0C	03	00
416.875	06	08	08	00	00	02	0C	03	08	0C	0C	0E	01	0C	03	00
416.900	08	08	08	00	00	02	0C	03	0A	0E	0C	0E	01	0C	03	00
416.925	0A	08	08	00	00	02	0C	03	0C	00	0C	0E	01	0C	03	00
416.950	0C	08	08	00	00	02	0C	03	0E	02	0C	0E	01	0C	03	00
416.975	0E	08	08	00	00	02	0C	03	00	04	0C	0E	01	0C	03	00
417.000	00	09	08	00	00	02	0C	03	02	06	0C	0E	01	0C	03	00
417.025	02	09	08	00	00	02	0C	03	04	08	0C	0E	01	0C	03	00
417.050	04	09	08	00	00	02	0C	03	06	0A	0C	0E	01	0C	03	00
417.075	06	09	08	00	00	02	0C	03	08	0C	0C	0E	01	0C	03	00
417.100	08	09	08	00	00	02	0C	03	0A	0E	0C	0E	01	0C	03	00
417.125	0A	09	08	00	00	02	0C	03	0C	00	0C	0E	01	0C	03	00
417.150	0C	09	08	00	00	02	0C	03	0E	02	0C	0E	01	0C	03	00
417.175	0E	09	08	00	00	02	0C	03	00	04	0C	0E	01	0C	03	00
417.200	00	09	08	00	00	02	0C	03	02	06	0C	0E	01	0C	03	00
417.225	02	09	08	00	00	02	0C	03	04	08	0C	0E	01	0C	03	00
417.250	04	09	08	00	00	02	0C	03	06	0A	0C	0E	01	0C	03	00
417.275	06	09	08	00	00	02	0C	03	08	0C	0C	0E	01	0C	03	00
417.300	08	09	08	00	00	02										

***D	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	F (MHz) 8 9 A B C D E F										0 1 2 3 4 5 6 7									
440.000	00	00	06	02	02	0C	03	00	00	00	00	0B	00	02	0C	03	00	00	00	00
440.025	02	00	06	02	02	0C	03	00	02	00	0B	00	02	0C	03	00	0A	03	0C	00
440.050	04	00	06	02	02	0C	03	00	04	00	0B	00	02	0C	03	00	0A	03	0C	00
440.075	06	00	06	02	02	0C	03	00	06	00	0B	00	02	0C	03	00	0C	03	0C	00
440.100	08	00	06	02	02	0C	03	00	08	00	0B	00	02	0C	03	00	0E	03	0C	00
440.125	0A	00	06	02	02	0C	03	00	0A	00	0B	00	02	0C	03	00	00	00	00	00
440.150	0C	00	06	02	02	0C	03	00	0C	00	0B	00	02	0C	03	00	02	00	00	00
440.175	0E	00	06	02	02	0C	03	00	0E	00	0B	00	02	0C	03	00	04	00	00	00
440.200	01	00	06	02	02	0C	03	00	01	00	0B	00	02	0C	03	00	06	00	00	00
440.225	02	01	06	02	02	0C	03	00	02	01	0B	00	02	0C	03	00	08	00	00	00
440.250	04	01	06	02	02	0C	03	00	04	01	0B	00	02	0C	03	00	0A	00	00	00
440.275	06	01	06	02	02	0C	03	00	06	01	0B	00	02	0C	03	00	0C	00	00	00
440.300	08	01	06	02	02	0C	03	00	08	01	0B	00	02	0C	03	00	0E	00	00	00
440.325	0A	01	06	02	02	0C	03	00	0A	01	0B	00	02	0C	03	00	00	01	00	00
440.350	0C	01	06	02	02	0C	03	00	0C	01	0B	00	02	0C	03	00	02	01	00	00
440.375	0E	01	06	02	02	0C	03	00	0E	01	0B	00	02	0C	03	00	04	01	00	00
440.400	00	02	06	02	02	0C	03	00	00	02	0B	00	02	0C	03	00	06	01	00	00
440.425	02	02	06	02	02	0C	03	00	02	02	0B	00	02	0C	03	00	08	01	00	00
440.450	04	02	06	02	02	0C	03	00	04	02	0B	00	02	0C	03	00	0A	01	00	00
440.475	06	02	06	02	02	0C	03	00	06	02	0B	00	02	0C	03	00	0C	01	00	00
440.500	08	02	06	02	02	0C	03	00	08	02	0B	00	02	0C	03	00	0E	01	00	00
440.525	0A	02	06	02	02	0C	03	00	0A	02	0B	00	02	0C	03	00	00	02	00	00
440.550	0C	02	06	02	02	0C	03	00	0C	02	0B	00	02	0C	03	00	02	02	00	00
440.575	0E	02	06	02	02	0C	03	00	0E	02	0B	00	02	0C	03	00	04	02	00	00
440.600	00	03	06	02	02	0C	03	00	00	03	0B	00	02	0C	03	00	06	02	00	00
440.625	02	03	06	02	02	0C	03	00	02	03	0B	00	02	0C	03	00	08	02	00	00
440.650	04	03	06	02	02	0C	03	00	04	03	0B	00	02	0C	03	00	0A	02	00	00
440.675	06	03	06	02	02	0C	03	00	06	03	0B	00	02	0C	03	00	0C	02	00	00
440.700	08	03	06	02	02	0C	03	00	08	03	0B	00	02	0C	03	00	0E	02	00	00
440.725	0A	03	06	02	02	0C	03	00	0A	03	0B	00	02	0C	03	00	00	03	00	00
440.750	0C	03	06	02	02	0C	03	00	0C	03	0B	00	02	0C	03	00	02	03	00	00
440.775	0E	03	06	02	02	0C	03	00	0E	03	0B	00	02	0C	03	00	04	03	00	00
440.800	00	07	02	02	0C	03	00	00	00	0C	00	00	02	0C	03	00	06	03	00	00
440.825	02	07	02	02	0C	03	00	02	00	0C	00	00	02	0C	03	00	08	03	00	00
440.850	04	07	02	02	0C	03	00	04	00	0C	00	00	02	0C	03	00	0A	03	00	00
440.875	06	07	02	02	0C	03	00	06	00	0C	00	00	02	0C	03	00	0C	03	00	00
440.900	08	07	02	02	0C	03	00	08	00	0C	00	00	02	0C	03	00	0E	03	00	00
440.925	0A	07	02	02	0C	03	00	0A	00	0C	00	00	02	0C	03	00	00	00	00	00
440.950	0C	07	02	02	0C	03	00	0C	00	0C	00	00	02	0C	03	00	02	00	00	00
440.975	0E	07	02	02	0C	03	00	0E	00	0C	00	00	02	0C	03	00	04	00	00	00
441.000	00	01	07	02	02	0C	03	00	00	01	0C	00	02	0C	03	00	06	00	00	00
441.025	02	01	07	02	02	0C	03	00	02	01	0C	00	02	0C	03	00	08	00	00	00
441.050	04	01	07	02	02	0C	03	00	04	01	0C	00	02	0C	03	00	0A	00	00	00
441.075	06	01	07	02	02	0C	03	00	06	01	0C	00	02	0C	03	00	0C	00	00	00
441.100	08	01	07	02	02	0C	03	00	08	01	0C	00	02	0C	03	00	0E	00	00	00
441.125	0A	01	07	02	02	0C	03	00	0A	01	0C	00	02	0C	03	00	00	01	00	00
441.150	0C	01	07	02	02	0C	03	00	0C	01	0C	00	02	0C	03	00	02	01	00	00
441.175	0E	01	07	02	02	0C	03	00	0E	01	0C	00	02	0C	03	00	04	01	00	00
441.200	00	02	07	02	02	0C	03	00	00	02	0C	00	02	0C	03	00	06	01	00	00
441.225	02	02	07	02	02	0C	03	00	02	02	0C	00	02	0C	03	00	08	01	00	00
441.250	04	02	07	02	02	0C	03	00	04	02	0C	00	02	0C	03	00	0A	01	00	00
441.275	06	02	07	02	02	0C	03	00	06	02	0C	00	02	0C	03	00	0C	01	00	00
441.300	08	02	07	02	02	0C	03	00	08	02	0C	00	02	0C	03	00	0E	01	00	00
441.325	0A	02	07	02	02	0C	03	00	0A	02	0C	00	02	0C	03	00	00	02	00	00
441.350	0C	02	07	02	02	0C	03	00	0C	02	0C	00	02	0C	03	00	04	02	00	00
441.375	0E	02	07	02	02	0C	03	00	0E	02	0C	00	02	0C	03	00	06	02	00	00
441.400	00	03	07	02	02	0C	03	00	00	03	0C	00	02	0C	03	00	08	02	00	00
441.425	02	03	07	02	02	0C	03	00	02	03	0C	00	02	0C	03	00	0A	02	00	00
441.450	04	03	07	02	02	0C	03	00	04	03	0C	00	02	0C	03	00	0C	02	00	00
441.475	06	03	07	02	02	0C	03	00	06	03	0C	00	02	0C	03	00	0E	02	00	00

ISSUE DATE: 8/01/91

PAGE 23

***D	UHF TX PROGRAM							UHF RX PROGRAM							UHF RX PROGRAM									
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
449.000	00	01	01	03	02	0C	03	00	00	01	06	01	02	0C	03	00	08	00	08	01	02	0C	03	00
449.025	02	01	01	03	02	0C	03	00	02	01	06	01	02	0C	03	00	0A	00	08	01	02	0C	03	00
449.050	04	01	01	03	02	0C	03	00	04	01	06	01	02	0C	03	00	0C	00	08	01	02	0C	03	00
449.075	06	01	01	03	02	0C	03	00	06	01	06	01	02	0C	03	00	0E	00	08	01	02	0C	03	00
449.100	08	01	01	03	02	0C	03	00	08	01	06	01	02	0C	03	00	00	01	08	01	02	0C	03	00
449.125	0A	01	01	03	02	0C	03	00	0A	01	06	01	02	0C	03	00	02	01	08	01	02	0C	03	00
449.150	0C	01	01	03	02	0C	03	00	0C	01	06	01	02	0C	03	00	04	01	08	01	02	0C	03	00
449.175	0E	01	01	03	02	0C	03	00	0E	01	06	01	02	0C	03	00	06	01	08	01	02	0C	03	00
449.200	00	02	01	03	02	0C	03	00	00	02	06	01	02	0C	03	00	08	01	08	01	02	0C	03	00
449.225	02	01	03	02	0C	03	00	00	02	06	01	02	0C	03	00	00	08	01	08	01	02	0C	03	00
449.250	04	02	01	03	02	0C	03	00	04	02	06	01	02	0C	03	00	0C	01	08	01	02	0C	03	00
449.275	06	02	01	03	02	0C	03	00	06	02	06	01	02	0C	03	00	0E	01	08	01	02	0C	03	00
449.300	08	02	01	03	02	0C	03	00	08	02	06	01	02	0C	03	00	00	02	08	01	02	0C	03	00
449.325	0A	02	01	03	02	0C	03	00	0A	02	06	01	02	0C	03	00	02	02	08	01	02	0C	03	00
449.350	0C	02	01	03	02	0C	03	00	0C	02	06	01	02	0C	03	00	04	02	08	01	02	0C	03	00
449.375	0E	02	01	03	02	0C	03	00	0E	02	06	01	02	0C	03	00	06	02	08	01	02	0C	03	00
449.400	00	03	01	03	02	0C	03	00	00	03	06	01	02	0C	03	00	08	02	08	01	02	0C	03	00
449.425	02	03	01	03	02	0C	03	00	02	03	06	01	02	0C	03	00	0A	02	08	01	02	0C	03	00
449.450	04	03	01	03	02	0C	03	00	04	03	06	01	02	0C	03	00	0C	02	08	01	02	0C	03	00
449.475	06	03	01	03	02	0C	03	00	06	03	06	01	02	0C	03	00	0E	02	08	01	02	0C	03	00
449.500	08	03	01	03	02	0C	03	00	08	03	06	01	02	0C	03	00	00	02	08	01	02	0C	03	00
449.525	0A	03	01	03	02	0C	03	00	0A	03	06	01	02	0C	03	00	02	03	08	01	02	0C	03	00
449.550	0C	03	01	03	02	0C	03	00	0C	03	06	01	02	0C	03	00	04	03	08	01	02	0C	03	00
449.575	0E	03	01	03	02	0C	03	00	0E	03	06	01	02	0C	03	00	06	03	08	01	02	0C	03	00
449.600	00	02	03	02	0C	03	00	00	00	07	01	02	0C	03	00	08	03	08	01	02	0C	03	00	00
449.625	02	00	02	03	02	0C	03	00	02	00	07	01	02	0C	03	00	0A	03	08	01	02	0C	03	00
449.650	04	00	02	03	02	0C	03	00	04	00	07	01	02	0C	03	00	0C	03	08	01	02	0C	03	00
449.675	06	00	02	03	02	0C	03	00	06	00	07	01	02	0C	03	00	0E	03	08	01	02	0C	03	00
449.700	08	00	02	03	02	0C	03	00	08	00	07	01	02	0C	03	00	00	09	01	02	0C	03	00	00
449.725	0A	00	02	03	02	0C	03	00	0A	00	07	01	02	0C	03	00	02	00	09	01	02	0C	03	00
449.750	0C	00	02	03	02	0C	03	00	0C	00	07	01	02	0C	03	00	04	00	09	01	02	0C	03	00
449.775	0E	00	02	03	02	0C	03	00	0E	00	07	01	02	0C	03	00	06	00	09	01	02	0C	03	00
449.800	00	01	02	03	02	0C	03	00	00	01	07	01	02	0C	03	00	08	00	09	01	02	0C	03	00
449.825	02	01	02	03	02	0C	03	00	02	01	07	01	02	0C	03	00	0A	00	09	01	02	0C	03	00
449.850	04	01	02	03	02	0C	03	00	04	01	07	01	02	0C	03	00	0C	00	09	01	02	0C	03	00
449.875	06	01	02	03	02	0C	03	00	06	01	07	01	02	0C	03	00	0E	00	09	01	02	0C	03	00
449.900	08	01	02	03	02	0C	03	00	08	01	07	01	02	0C	03	00	00	01	09	01	02	0C	03	00
449.925	0A	01	02	03	02	0C	03	00	0A	01	07	01	02	0C	03	00	02	01	09	01	02	0C	03	00
449.950	0C	01	02	03	02	0C	03	00	0C	01	07	01	02	0C	03	00	04	01	09	01	02	0C	03	00
449.975	0E	01	02	03	02	0C	03	00	0E	01	07	01	02	0C	03	00	06	01	09	01	02	0C	03	00
450.000	00	02	02	03	02	0C	03	00	00	02	07	01	02	0C	03	00	08	01	09	01	02	0C	03	00
450.025	02	02	03	02	0C	03	00	00	02	07	01	02	0C	03	00	00	06	01	09	01	02	0C	03	00
450.050	04	02	02	03	02	0C	03	00	04	02	07	01	02	0C	03	00	0A	01	09	01	02	0C	03	00
450.075	06	02	02	03	02	0C	03	00	06	02	07	01	02	0C	03	00	0C	01	09	01	02	0C	03	00
450.100	08	02	02	03	02	0C	03	00	08	02	07	01	02	0C	03	00	0E	01	09	01	02	0C	03	00
450.125	0A	02	02	03	02	0C	03	00	0A	02	07	01	02	0C	03	00	00	02	09	01	02	0C	03	00
450.150	0C	02	02	03	02	0C	03	00	0C	02	07	01	02	0C	03	00	02	02	09	01	02	0C	03	00
450.175	0E	02	02	03	02	0C	03	00	0E	02	07	01	02	0C	03	00	04	02	09	01	02	0C	03	00
450.200	00	03	02	03	02	0C	03	00	00	03	07	01	02	0C	03	00	06	02	09	01	02	0C	03	00
450.225	02	03	02	03	02	0C	03	00	02	03	07	01	02	0C	03	00	08	02	09	01	02	0C	03	00
450.250	04	03	02	03	02	0C	03	00	04	03	07	01	02	0C	03	00	0A	02	09	01	02	0C	03	00
450.275	06	03	02	03	02	0C	03	00	06	03	07	01	02	0C	03	00	0C	02	09	01	02	0C	03	00
450.300	08	03	02	03	02	0C	03	00	08	03	07	01	02	0C	03	00	0E	02	09	01	02	0C	03	00
450.325	0A	03	02	03	02	0C	03	00	0A	03	07	01	02	0C	03	00	00	03	09	01	02	0C	03	00
450.350	0C	03	02	03	02	0C	03	00	0C	03	07	01	02	0C	03	00	02	02	09	01	02	0C	03	00
450.375	0E	03	02	03	02	0C	03	00	0E	03	07	01	02	0C	03	00	04	03	09	01	02	0C	03	00
450.400	00	00	03	03	02	0C	03	00	00	00	08	01	02	0C	03	00	06	03	09	01	02	0C	03	00
450.425	02	00	03	03	02	0C	03	00	02	00	08	01	02	0C	03	00	08	03	09	01	02	0C	03	00
450.450	04	00	03	03	02	0C	03	00	04	00	08	01	02	0C	03	00	0A	03	09	01	02	0C	03	00
450.475	06	00	03	03	02	0C	03	00	06	00	08	01	02	0C	03	00	0E	03	09	01	02	0C	03	00

***D F (MHz)	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	8	9	A	B	C	D	E	F			8	9	A	B	C	D	E	F		
452.000	00	00	05	03	02	0C	03	00			00	00	0A	01	02	0C	03	00		
452.025	02	00	05	03	02	0C	03	00			02	00	0A	01	02	0C	03	00		
452.050	04	00	05	03	02	0C	03	00			04	00	0A	01	02	0C	03	00		
452.075	06	00	05	03	02	0C	03	00			06	00	0A	01	02	0C	03	00		
452.100	08	00	05	03	02	0C	03	00			08	00	0A	01	02	0C	03	00		
452.125	0A	00	05	03	02	0C	03	00			0A	00	0A	01	02	0C	03	00		
452.150	0C	00	05	03	02	0C	03	00			0C	00	0A	01	02	0C	03	00		
452.175	0E	00	05	03	02	0C	03	00			0E	00	0A	01	02	0C	03	00		
452.200	01	01	05	03	02	0C	03	00			00	01	0A	01	02	0C	03	00		
452.225	02	01	05	03	02	0C	03	00			02	01	0A	01	02	0C	03	00		
452.250	04	01	05	03	02	0C	03	00			04	01	0A	01	02	0C	03	00		
452.275	06	01	05	03	02	0C	03	00			06	01	0A	01	02	0C	03	00		
452.300	08	01	05	03	02	0C	03	00			08	01	0A	01	02	0C	03	00		
452.325	0A	01	05	03	02	0C	03	00			0A	01	0A	01	02	0C	03	00		
452.350	0C	01	05	03	02	0C	03	00			0C	01	0A	01	02	0C	03	00		
452.375	0E	01	05	03	02	0C	03	00			0E	01	0A	01	02	0C	03	00		
452.400	00	02	05	03	02	0C	03	00			00	02	0A	01	02	0C	03	00		
452.425	02	02	05	03	02	0C	03	00			02	02	0A	01	02	0C	03	00		
452.450	04	02	05	03	02	0C	03	00			04	02	0A	01	02	0C	03	00		
452.475	06	02	05	03	02	0C	03	00			06	02	0A	01	02	0C	03	00		
452.500	08	02	05	03	02	0C	03	00			08	02	0A	01	02	0C	03	00		
452.525	0A	02	05	03	02	0C	03	00			0A	02	0A	01	02	0C	03	00		
452.550	0C	02	05	03	02	0C	03	00			0C	02	0A	01	02	0C	03	00		
452.575	0E	02	05	03	02	0C	03	00			0E	02	0A	01	02	0C	03	00		
452.600	00	03	05	03	02	0C	03	00			00	03	0A	01	02	0C	03	00		
452.625	02	03	05	03	02	0C	03	00			02	03	0A	01	02	0C	03	00		
452.650	04	03	05	03	02	0C	03	00			04	03	0A	01	02	0C	03	00		
452.675	06	03	05	03	02	0C	03	00			06	03	0A	01	02	0C	03	00		
452.700	08	03	05	03	02	0C	03	00			08	03	0A	01	02	0C	03	00		
452.725	0A	03	05	03	02	0C	03	00			0A	03	0A	01	02	0C	03	00		
452.750	0C	03	05	03	02	0C	03	00			0C	03	0A	01	02	0C	03	00		
452.775	0E	03	05	03	02	0C	03	00			0E	03	0A	01	02	0C	03	00		
452.800	00	00	06	03	02	0C	03	00			00	00	0B	01	02	0C	03	00		
452.825	02	00	06	03	02	0C	03	00			02	00	0B	01	02	0C	03	00		
452.850	04	00	06	03	02	0C	03	00			04	00	0B	01	02	0C	03	00		
452.875	06	00	06	03	02	0C	03	00			06	00	0B	01	02	0C	03	00		
452.900	08	00	06	03	02	0C	03	00			08	00	0B	01	02	0C	03	00		
452.925	0A	00	06	03	02	0C	03	00			0A	00	0B	01	02	0C	03	00		
452.950	0C	00	06	03	02	0C	03	00			0C	00	0B	01	02	0C	03	00		
452.975	0E	00	06	03	02	0C	03	00			0E	00	0B	01	02	0C	03	00		
453.000	00	01	06	03	02	0C	03	00			00	01	0B	01	02	0C	03	00		
453.025	02	01	06	03	02	0C	03	00			02	01	0B	01	02	0C	03	00		
453.050	04	01	06	03	02	0C	03	00			04	01	0B	01	02	0C	03	00		
453.075	06	01	06	03	02	0C	03	00			06	01	0B	01	02	0C	03	00		
453.100	08	01	06	03	02	0C	03	00			08	01	0B	01	02	0C	03	00		
453.125	0A	01	06	03	02	0C	03	00			0A	01	0B	01	02	0C	03	00		
453.150	0C	01	06	03	02	0C	03	00			0C	01	0B	01	02	0C	03	00		
453.175	0E	01	06	03	02	0C	03	00			0E	01	0B	01	02	0C	03	00		
453.200	00	02	06	03	02	0C	03	00			00	02	0B	01	02	0C	03	00		
453.225	02	02	06	03	02	0C	03	00			02	02	0B	01	02	0C	03	00		
453.250	04	02	06	03	02	0C	03	00			04	02	0B	01	02	0C	03	00		
453.275	06	02	06	03	02	0C	03	00			06	02	0B	01	02	0C	03	00		
453.300	08	02	06	03	02	0C	03	00			08	02	0B	01	02	0C	03	00		
453.325	0A	02	06	03	02	0C	03	00			0A	02	0B	01	02	0C	03	00		
453.350	0C	02	06	03	02	0C	03	00			0C	02	0B	01	02	0C	03	00		
453.375	0E	02	06	03	02	0C	03	00			0E	02	0B	01	02	0C	03	00		
453.400	00	03	06	03	02	0C	03	00			00	03	0B	01	02	0C	03	00		
453.425	02	03	06	03	02	0C	03	00			02	03	0B	01	02	0C	03	00		
453.450	04	03	06	03	02	0C	03	00			04	03	0B	01	02	0C	03	00		
453.475	06	03	06	03	02	0C	03	00			06	03	0B	01	02	0C	03	00		

F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM							UHF RX PROGRAM																			
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7												
	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F		
455.000	00	03	08	03	02	0C	03	00	00	03	00	01	02	0C	03	00	455.500	08	02	0A	03	02	0C	03	00	08	02	0F	01	02	0C	03	00	
455.025	02	03	08	03	02	0C	03	00	02	03	00	01	02	0C	03	00	455.525	0A	02	0A	03	02	0C	03	00	0A	02	0F	01	02	0C	03	00	
455.050	04	03	08	03	02	0C	03	00	04	03	00	01	02	0C	03	00	455.550	0C	02	0A	03	02	0C	03	00	0C	02	0F	01	02	0C	03	00	
455.075	06	03	08	03	02	0C	03	00	06	03	00	01	02	0C	03	00	455.575	0E	02	0A	03	02	0C	03	00	0E	02	0F	01	02	0C	03	00	
455.100	08	03	08	03	02	0C	03	00	08	03	00	01	02	0C	03	00	455.600	00	03	0A	03	02	0C	03	00	00	03	0F	01	02	0C	03	00	
455.125	0A	03	08	03	02	0C	03	00	0A	03	00	01	02	0C	03	00	455.625	02	03	0A	03	02	0C	03	00	02	03	0F	01	02	0C	03	00	
455.150	0C	03	08	03	02	0C	03	00	0C	03	00	01	02	0C	03	00	455.650	04	03	0A	03	02	0C	03	00	04	03	0F	01	02	0C	03	00	
455.175	0E	03	08	03	02	0C	03	00	0E	03	00	01	02	0C	03	00	455.675	06	03	0A	03	02	0C	03	00	06	03	0F	01	02	0C	03	00	
455.200	00	09	03	02	0C	03	00	00	00	0E	01	02	0C	03	00	455.700	08	03	0A	03	02	0C	03	00	08	03	0F	01	02	0C	03	00		
455.225	02	00	09	03	02	0C	03	00	02	00	0E	01	02	0C	03	00	455.725	0A	03	0A	03	02	0C	03	00	0A	03	0F	01	02	0C	03	00	
455.250	04	00	09	03	02	0C	03	00	04	00	0E	01	02	0C	03	00	455.750	0C	03	0A	03	02	0C	03	00	0C	03	0F	01	02	0C	03	00	
455.275	06	00	09	03	02	0C	03	00	06	00	0E	01	02	0C	03	00	455.775	0E	03	0A	03	02	0C	03	00	0E	03	0F	01	02	0C	03	00	
455.300	08	00	09	03	02	0C	03	00	08	00	0E	01	02	0C	03	00	455.800	00	03	0A	03	02	0C	03	00	00	03	0F	01	02	0C	03	00	
455.325	0A	00	09	03	02	0C	03	00	0A	00	0E	01	02	0C	03	00	455.825	02	00	0B	03	02	0C	03	00	02	00	02	02	0C	03	00	00	
455.350	0C	00	09	03	02	0C	03	00	0C	00	0E	01	02	0C	03	00	455.850	04	00	0B	03	02	0C	03	00	04	00	00	02	02	0C	03	00	00
455.375	0E	00	09	03	02	0C	03	00	0E	00	0E	01	02	0C	03	00	455.875	06	00	0B	03	02	0C	03	00	06	00	00	02	02	0C	03	00	00
455.400	00	01	09	03	02	0C	03	00	00	01	0E	01	02	0C	03	00	455.900	08	00	0B	03	02	0C	03	00	08	00	00	02	02	0C	03	00	00
455.425	02	01	09	03	02	0C	03	00	02	01	0E	01	02	0C	03	00	455.925	0A	00	0B	03	02	0C	03	00	0A	00	00	02	02	0C	03	00	00
455.450	04	01	09	03	02	0C	03	00	04	01	0E	01	02	0C	03	00	455.950	0C	00	0B	03	02	0C	03	00	0C	00	00	02	02	0C	03	00	00
455.475	06	01	09	03	02	0C	03	00	06	01	0E	01	02	0C	03	00	456.000	00	01	0B	03	02	0C	03	00	0A	01	00	02	02	0C	03	00	00
455.500	08	01	09	03	02	0C	03	00	08	01	0E	01	02	0C	03	00	456.025	0A	02	0B	03	02	0C	03	00	0C	01	00	02	02	0C	03	00	00
455.525	0A	01	09	03	02	0C	03	00	0A	01	0E	01	02	0C	03	00	456.050	0C	02	0B	03	02	0C	03	00	0A	02	00	02	02	0C	03	00	00
455.550	0C	01	09	03	02	0C	03	00	0C	01	0E	01	02	0C	03	00	456.075	0E	03	0B	03	02	0C	03	00	0C	02	00	02	02	0C	03	00	00
455.575	0E	01	09	03	02	0C	03	00	0E	01	0E	01	02	0C	03	00	456.100	00	04	0B	03	02	0C	03	00	0A	02	00	02	02	0C	03	00	00
455.600	00	02	09	03	02	0C	03	00	00	02	0E	01	02	0C	03	00	456.125	0A	02	0B	03	02	0C	03	00	0C	02	00	02	02	0C	03	00	00
455.625	02	02	09	03	02	0C	03	00	02	02	0E	01	02	0C	03	00	456.150	0C	00	0B	03	02	0C	03	00	0E	02	00	02	02	0C	03	00	00
455.650	04	02	09	03	02	0C	03	00	04	02	0E	01	02	0C	03	00	456.175	0E	00	0A	03	02	0C	03	00	06	00	01	02	02	0C	03	00	00
455.675	06	02	09	03	02	0C	03	00	06	02	0E	01	02	0C	03	00	456.200	00	01	0A	03	02	0C	03	00	08	00	01	02	02	0C	03	00	00
455.700	08	02	09	03	02	0C	03	00	08	02	0E	01	02	0C	03	00	456.225	02	00	0A	03	02	0C	03	00	0A	00	01	02	02	0C	03	00	00
455.725	0A	02	09	03	02	0C	03	00	0A	02	0E	01	02	0C	03	00	456.250	04	01	0A	03	02	0C	03	00	0C	00	01	02	02	0C	03	00	00
455.750	0C	02	09	03	02	0C	03	00	0C	02	0E	01	02	0C	03	00	456.275	06	01	0A	03	02	0C	03	00	04	00	01	02	02	0C	03	00	00
455.775	0E	02	09	03	02	0C	03	00	0E	02	0E	01	02	0C	03	00	456.300	08	01	0A	03	02	0C	03	00	0E	00	01	02	02	0C	03	00	00
455.800	00	03	09	03	02	0C	03	00	00	03	0E	01	02	0C	03	00	456.325	0A	01	0A	03	02	0C	03	00	02	01	01	02	02	0C	03	00	00
455.825	02	03	09	03	02	0C	03	00	02	03	0E	01	02	0C	03	00	456.350	0C	01	0A	03	02	0C	03	00	0C	00	01	02	02	0C	03	00	00
455.850	04	03	09	03	02	0C	03	00	04	03	0E	01	02	0C	03	00	456.375	0E	01	0A	03	02	0C	03	00	0E	01	01	02	02	0C	03	00	00
455.875	06	03	09	03	02	0C	03	00	06	03	0E	01	02	0C	03	00	456.400	00	02	0A	03	02	0C	03	00	00	02	0F	01	02	02	0C	03	00
455.900	08	03	09	03	02	0C	03	00	08	03	0E	01	02	0C	03	00	456.425	02	0A	03	02	0C	03	00	02	02	0F	01	02	02	0C	03	00	00
455.925	0A	03	09	03	02	0C	03	00	0A	03	0E	01	02	0C	03	00	456.450	04	02	0A	03	02	0C	03	00	04	02	0F	01	02	02	0C	03	00
455.950	0C	03	09	03	02	0C	03	00	0C	03	0E	01	02	0C	03	00	456.475	06	02	0A	03	02	0C	03	00	06	02	0F	01	02	02	0C	03	00
456.000	00	00	0A	03	02	0C	03	00	00	00	0F	01	02	0C	03	00																		
456.025	02	00	0A	03	02	0C	03	00	02	00	0F	01	02	0C	03	00																		
456.050	04	00	0A	03	02	0C	03	00	04	00	0F	01	02	0C	03	00																		
456.075	06	00	0A	03	02	0C	03	00	06	00	0F	01	02	0C	03	00																		
456.100	08	00	0A	03	02	0C	03	00	08	00	0F	01	02	0C	03	00																		
456.125	0A	00	0A	03	02	0C	03	00	0A	00	0F	01	02	0C	03	00																		
456.150	0C	00	0A	03	02	0C	03	00	0C	00	0F	01	02	0C	03	00																		
456.175	0E	00	0A	03	02	0C	03	00	0E	00	0F	01	02	0C	03	00																		
456.200	00	01	0A	03	02	0C	03	00	00	01	0F	01	02	0C	03	00																		
456.225	02	00	0A	03	02	0C	03	00	02	00	0F	01	02	0C	03	00																		
456.250	04	01	0A	03	02	0C	03	00	04	01	0F	01	02																					

F (MHz)										UHF TX PROGRAM							UHF RX PROGRAM									
0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7									
459.500	08	01	0E	03	02	0C	03	00	08	01	0E	03	02	0C	03	00	08	01	03	02	02	0C	03	00		
459.525	0A	01	0E	03	02	0C	03	00	0A	01	0E	03	02	0C	03	00	0A	01	03	02	02	0C	03	00		
459.550	0C	01	0E	03	02	0C	03	00	0C	01	0E	03	02	0C	03	00	0C	01	03	02	02	0C	03	00		
459.575	0E	01	0E	03	02	0C	03	00	0E	01	0E	03	02	0C	03	00	0E	01	03	02	02	0C	03	00		
459.600	00	02	0E	03	02	0C	03	00	00	02	0E	03	02	0C	03	00	00	02	03	02	02	0C	03	00		
459.625	02	0E	03	02	0C	03	00	00	02	0E	03	02	0C	03	00	00	02	03	02	02	0C	03	00			
459.650	04	02	0E	03	02	0C	03	00	04	02	0E	03	02	0C	03	00	04	02	03	02	02	0C	03	00		
459.675	06	02	0E	03	02	0C	03	00	06	02	0E	03	02	0C	03	00	06	02	03	02	02	0C	03	00		
459.700	08	02	0E	03	02	0C	03	00	08	02	0E	03	02	0C	03	00	08	02	03	02	02	0C	03	00		
459.725	0A	02	0E	03	02	0C	03	00	0A	02	0E	03	02	0C	03	00	0A	02	03	02	02	0C	03	00		
459.750	0C	02	0E	03	02	0C	03	00	0C	02	0E	03	02	0C	03	00	0C	02	03	02	02	0C	03	00		
459.775	0E	02	0E	03	02	0C	03	00	0E	02	0E	03	02	0C	03	00	0E	02	03	02	02	0C	03	00		
459.800	00	03	0E	03	02	0C	03	00	00	03	0E	03	02	0C	03	00	00	03	02	02	02	0C	03	00		
459.825	02	03	0E	03	02	0C	03	00	02	03	0E	03	02	0C	03	00	02	03	02	02	02	0C	03	00		
459.850	04	03	0E	03	02	0C	03	00	04	03	0E	03	02	0C	03	00	04	03	02	02	02	0C	03	00		
459.875	06	03	0E	03	02	0C	03	00	06	03	0E	03	02	0C	03	00	06	03	02	02	02	0C	03	00		
459.900	08	03	0E	03	02	0C	03	00	08	03	0E	03	02	0C	03	00	08	03	02	02	02	0C	03	00		
459.925	0A	03	0E	03	02	0C	03	00	0A	03	0E	03	02	0C	03	00	0A	03	02	02	02	0C	03	00		
459.950	0C	03	0E	03	02	0C	03	00	0C	03	0E	03	02	0C	03	00	0C	03	02	02	02	0C	03	00		
459.975	0E	03	0E	03	02	0C	03	00	0E	03	0E	03	02	0C	03	00	0E	03	02	02	02	0C	03	00		
460.000	00	0F	03	02	0C	03	00	00	00	0F	03	02	0C	03	00	00	00	0F	03	02	02	0C	03	00		
460.025	02	00	0F	03	02	0C	03	00	02	00	0F	03	02	0C	03	00	02	00	0F	03	02	02	0C	03	00	
460.050	04	00	0F	03	02	0C	03	00	04	00	0F	03	02	0C	03	00	04	00	0F	03	02	02	0C	03	00	
460.075	06	00	0F	03	02	0C	03	00	06	00	0F	03	02	0C	03	00	06	00	0F	03	02	02	0C	03	00	
460.100	08	00	0F	03	02	0C	03	00	08	00	0F	03	02	0C	03	00	08	00	0F	03	02	02	0C	03	00	
460.125	0A	00	0F	03	02	0C	03	00	0A	00	0F	03	02	0C	03	00	0A	00	0F	03	02	02	0C	03	00	
460.150	0C	00	0F	03	02	0C	03	00	0C	00	0F	03	02	0C	03	00	0C	00	0F	03	02	02	0C	03	00	
460.175	0E	00	0F	03	02	0C	03	00	0E	00	0F	03	02	0C	03	00	0E	00	0F	03	02	02	0C	03	00	
460.200	00	01	0F	03	02	0C	03	00	00	01	0F	03	02	0C	03	00	00	01	0F	03	02	02	0C	03	00	
460.225	02	01	0F	03	02	0C	03	00	02	01	0F	03	02	0C	03	00	02	01	0F	03	02	02	0C	03	00	
460.250	04	01	0F	03	02	0C	03	00	04	01	0F	03	02	0C	03	00	04	01	0F	03	02	02	0C	03	00	
460.275	06	01	0F	03	02	0C	03	00	06	01	0F	03	02	0C	03	00	06	01	0F	03	02	02	0C	03	00	
460.300	08	01	0F	03	02	0C	03	00	08	01	0F	03	02	0C	03	00	08	01	0F	03	02	02	0C	03	00	
460.325	0A	01	0F	03	02	0C	03	00	0A	01	0F	03	02	0C	03	00	0A	01	0F	03	02	02	0C	03	00	
460.350	0C	01	0F	03	02	0C	03	00	0C	01	0F	03	02	0C	03	00	0C	01	0F	03	02	02	0C	03	00	
460.375	0E	01	0F	03	02	0C	03	00	0E	01	0F	03	02	0C	03	00	0E	01	0F	03	02	02	0C	03	00	
460.400	00	02	0F	03	02	0C	03	00	00	02	0F	03	02	0C	03	00	00	02	0F	03	02	02	0C	03	00	
460.425	02	02	0F	03	02	0C	03	00	02	02	0F	03	02	0C	03	00	02	02	0F	03	02	02	0C	03	00	
460.450	04	02	0F	03	02	0C	03	00	04	02	0F	03	02	0C	03	00	04	02	0F	03	02	02	0C	03	00	
460.475	06	02	0F	03	02	0C	03	00	06	02	0F	03	02	0C	03	00	06	02	0F	03	02	02	0C	03	00	
460.500	08	02	0F	03	02	0C	03	00	08	02	0F	03	02	0C	03	00	08	02	0F	03	02	02	0C	03	00	
460.525	0A	02	0F	03	02	0C	03	00	0A	02	0F	03	02	0C	03	00	0A	02	0F	03	02	02	0C	03	00	
460.550	0C	02	0F	03	02	0C	03	00	0C	02	0F	03	02	0C	03	00	0C	02	0F	03	02	02	0C	03	00	
460.575	0E	02	0F	03	02	0C	03	00	0E	02	0F	03	02	0C	03	00	0E	02	0F	03	02	02	0C	03	00	
460.600	00	03	0F	03	02	0C	03	00	00	03	0F	03	02	0C	03	00	00	03	0F	03	02	02	0C	03	00	
460.625	02	03	0F	03	02	0C	03	00	02	03	0F	03	02	0C	03	00	02	03	0F	03	02	02	0C	03	00	
460.650	04	03	0F	03	02	0C	03	00	04	03	0F	03	02	0C	03	00	04	03	0F	03	02	02	0C	03	00	
460.675	06	03	0F	03	02	0C	03	00	06	03	0F	03	02	0C	03	00	06	03	0F	03	02	02	0C	03	00	
460.700	08	03	0F	03	02	0C	03	00	08	03	0F	03	02	0C	03	00	08	03	0F	03	02	02	0C	03	00	
460.725	0A	03	0F	03	02	0C	03	00	0A	03	0F	03	02	0C	03	00	0A	03	0F	03	02	02	0C	03	00	
460.750	0C	03	0F	03	02	0C	03	00	0C	03	0F	03	02	0C	03	00	0C	03	0F	03	02	02	0C	03	00	
460.775	0E	03	0F	03	02	0C	03	00	0E	03	0F	03	02	0C	03	00	0E	03	0F	03	02	02	0C	03	00	
460.800	00	00	04	02	0C	03	00	00	00	04	02	0C	03	00	00	00	00	04	02	0C	02	02	0C	03	00	
460.825	02	00	04	02	0C	03	00	02	00	04	02	0C	03	00	02	00	02	04	02	0C	02	02	0C	03	00	
460.850	04	00	04	02	0C	03	00	04	00	04	02	0C	03	00	04	00	04	02	0C	02	02	0C	03	00		
460.875	06	00	04	02	0C	03	00	06	00	04	02	0C	03	00	06	00	04	02	0C	02	02	0C	03	00		
460.900	08	00	04	02	0C	03	00	08	00	04	02	0C	03	00	08	00	04	02	0C	02	02	0C	03	00		
460.925	0A	00	04	02	0C	03	00	0A	00	04	02	0C	03	00	0A	00	04	02	0C	02	02	0C	03	00		
460.950	0C	00	04	02	0C	03	00	0C	00	04	02	0C	03	00	0C	00	04	02	0C	02	02	0C	03	00		
460.975	0E	00	04	02	0C	03	00	0E	00	04	02	0C	03	00	0E	00	04	02	0C	02	02	0C	03	00		
460.975	0E	00	04	02	0C	03	00	460.975	0E	00	04	02	0C	03	00	460.975	0E	00	04	02	0C	02	02	0C	03	00

***D	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	F (MHz) 8 9 A B C D E F										0 1 2 3 4 5 6 7									
461.000	00	01	00	04	02	0C	03	00			00	01	05	02	02	0C	03	00		
461.025	02	01	00	04	02	0C	03	00			02	01	05	02	02	0C	03	00		
461.050	04	01	00	04	02	0C	03	00			04	01	05	02	02	0C	03	00		
461.075	06	01	00	04	02	0C	03	00			06	01	05	02	02	0C	03	00		
461.100	08	01	00	04	02	0C	03	00			08	01	05	02	02	0C	03	00		
461.125	0A	01	00	04	02	0C	03	00			0A	01	05	02	02	0C	03	00		
461.150	0C	01	00	04	02	0C	03	00			0C	01	05	02	02	0C	03	00		
461.175	0E	01	00	04	02	0C	03	00			0E	01	05	02	02	0C	03	00		
461.200	02	00	04	02	0C	03	00				00	02	05	02	02	0C	03	00		
461.225	02	00	04	02	0C	03	00				02	02	05	02	02	0C	03	00		
461.250	04	02	00	04	02	0C	03	00			04	02	05	02	02	0C	03	00		
461.275	06	02	00	04	02	0C	03	00			06	02	05	02	02	0C	03	00		
461.300	08	02	00	04	02	0C	03	00			08	02	05	02	02	0C	03	00		
461.325	0A	02	00	04	02	0C	03	00			0A	02	05	02	02	0C	03	00		
461.350	0C	02	00	04	02	0C	03	00			0C	02	05	02	02	0C	03	00		
461.375	0E	02	00	04	02	0C	03	00			0E	02	05	02	02	0C	03	00		
461.400	00	03	00	04	02	0C	03	00			00	03	05	02	02	0C	03	00		
461.425	02	03	00	04	02	0C	03	00			02	03	05	02	02	0C	03	00		
461.450	04	03	00	04	02	0C	03	00			04	03	05	02	02	0C	03	00		
461.475	06	03	00	04	02	0C	03	00			06	03	05	02	02	0C	03	00		
461.500	08	03	00	04	02	0C	03	00			08	03	05	02	02	0C	03	00		
461.525	0A	03	00	04	02	0C	03	00			0A	03	05	02	02	0C	03	00		
461.550	0C	03	00	04	02	0C	03	00			0C	03	05	02	02	0C	03	00		
461.575	0E	03	00	04	02	0C	03	00			0E	03	05	02	02	0C	03	00		
461.600	00	01	04	02	0C	03	00				00	00	06	02	02	0C	03	00		
461.625	00	01	04	02	0C	03	00				02	00	06	02	02	0C	03	00		
461.650	04	00	01	04	02	0C	03	00			04	00	06	02	02	0C	03	00		
461.675	06	01	04	02	0C	03	00				06	00	06	02	02	0C	03	00		
461.700	08	00	01	04	02	0C	03	00			08	00	06	02	02	0C	03	00		
461.725	0A	00	01	04	02	0C	03	00			0A	00	06	02	02	0C	03	00		
461.750	0C	00	01	04	02	0C	03	00			0C	00	06	02	02	0C	03	00		
461.775	0E	00	01	04	02	0C	03	00			0E	00	06	02	02	0C	03	00		
461.800	00	01	04	02	0C	03	00				00	01	06	02	02	0C	03	00		
461.825	02	01	04	02	0C	03	00				02	01	06	02	02	0C	03	00		
461.850	04	01	04	02	0C	03	00				04	01	06	02	02	0C	03	00		
461.875	06	01	04	02	0C	03	00				06	01	06	02	02	0C	03	00		
461.900	08	01	04	02	0C	03	00				08	01	06	02	02	0C	03	00		
461.925	0A	01	04	02	0C	03	00				0A	01	06	02	02	0C	03	00		
461.950	0C	01	04	02	0C	03	00				0C	01	06	02	02	0C	03	00		
461.975	0E	01	04	02	0C	03	00				0E	01	06	02	02	0C	03	00		
462.000	00	02	01	04	02	0C	03	00			00	02	06	02	02	0C	03	00		
462.025	02	02	01	04	02	0C	03	00			02	02	06	02	02	0C	03	00		
462.050	04	02	01	04	02	0C	03	00			04	02	06	02	02	0C	03	00		
462.075	06	02	01	04	02	0C	03	00			06	02	06	02	02	0C	03	00		
462.100	08	02	01	04	02	0C	03	00			08	02	06	02	02	0C	03	00		
462.125	0A	02	01	04	02	0C	03	00			0A	02	06	02	02	0C	03	00		
462.150	0C	02	01	04	02	0C	03	00			0C	02	06	02	02	0C	03	00		
462.175	0E	02	01	04	02	0C	03	00			0E	02	06	02	02	0C	03	00		
462.200	00	03	01	04	02	0C	03	00			00	03	06	02	02	0C	03	00		
462.225	02	03	01	04	02	0C	03	00			02	03	06	02	02	0C	03	00		
462.250	04	03	01	04	02	0C	03	00			04	03	06	02	02	0C	03	00		
462.275	06	03	01	04	02	0C	03	00			06	03	06	02	02	0C	03	00		
462.300	08	03	01	04	02	0C	03	00			08	03	06	02	02	0C	03	00		
462.325	0A	03	01	04	02	0C	03	00			0A	03	06	02	02	0C	03	00		
462.350	0C	03	01	04	02	0C	03	00			0C	03	06	02	02	0C	03	00		
462.375	0E	03	01	04	02	0C	03	00			0E	03	06	02	02	0C	03	00		
462.400	00	00	02	04	02	0C	03	00			00	00	07	02	02	0C	03	00		
462.425	02	00	02	04	02	0C	03	00			02	00	07	02	02	0C	03	00		
462.450	04	00	02	04	02	0C	03	00			04	00	07	02	02	0C	03	00		
462.475	06	00	02	04	02	0C	03	00			06	00	07	02	02	0C	03	00		

***D										UHF TX PROGRAM							UHF RX PROGRAM							UHF RX PROGRAM													
F (MHz)							8	9	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7				
464.000	00	00	04	04	02	03	00	00	09	02	02	02	03	00	00	03	0A	02	02	02	03	00	08	03	0A	02	02	02	03	00	08	03	0A	02	02	03	00
464.025	02	00	04	04	02	03	00	02	00	09	02	02	03	00	02	00	0A	02	02	02	03	00	0A	03	0A	02	02	02	03	00	0A	03	0A	02	02	03	00
464.050	04	00	04	04	02	03	00	04	00	09	02	02	03	00	06	00	0A	02	02	02	03	00	0E	03	0A	02	02	02	03	00	0E	03	0A	02	02	03	00
464.075	06	00	04	04	02	03	00	08	00	09	02	02	03	00	08	00	0A	02	02	02	03	00	02	00	0B	02	02	02	03	00	02	00	0B	02	02	03	00
464.100	08	00	04	04	02	03	00	0A	00	09	02	02	03	00	0A	00	0A	02	02	02	03	00	02	00	0B	02	02	02	03	00	02	00	0B	02	02	03	00
464.125	0A	00	04	04	02	03	00	0C	00	09	02	02	03	00	0C	00	0A	02	02	02	03	00	04	00	0B	02	02	02	03	00	04	00	0B	02	02	03	00
464.150	0C	00	04	04	02	03	00	0E	00	09	02	02	03	00	0E	00	0A	02	02	02	03	00	06	00	0B	02	02	02	03	00	06	00	0B	02	02	03	00
464.175	0E	00	04	04	02	03	00	01	00	09	02	02	03	00	01	00	0A	02	02	02	03	00	08	00	0B	02	02	02	03	00	08	00	0B	02	02	03	00
464.200	01	00	04	04	02	03	00	02	01	09	02	02	03	00	02	01	0A	02	02	02	03	00	0A	00	0B	02	02	02	03	00	0A	00	0B	02	02	03	00
464.225	02	01	04	04	02	03	00	04	01	09	02	02	03	00	04	01	0A	02	02	02	03	00	0C	00	0B	02	02	02	03	00	0C	00	0B	02	02	03	00
464.250	04	01	04	04	02	03	00	06	01	09	02	02	03	00	06	01	0A	02	02	02	03	00	0E	00	0B	02	02	02	03	00	0E	00	0B	02	02	03	00
464.275	06	01	04	04	02	03	00	08	01	09	02	02	03	00	08	01	0A	02	02	02	03	00	02	01	0B	02	02	02	03	00	02	01	0B	02	02	03	00
464.300	08	01	04	04	02	03	00	0A	01	09	02	02	03	00	0A	01	0A	02	02	02	03	00	02	01	0B	02	02	02	03	00	02	01	0B	02	02	03	00
464.325	0A	01	04	04	02	03	00	0C	01	09	02	02	03	00	0C	01	0A	02	02	02	03	00	02	01	0B	02	02	02	03	00	02	01	0B	02	02	03	00
464.350	0C	01	04	04	02	03	00	0E	01	09	02	02	03	00	0E	01	0A	02	02	02	03	00	04	01	0B	02	02	02	03	00	04	01	0B	02	02	03	00
464.375	0E	01	04	04	02	03	00	01	02	09	02	02	03	00	01	02	0A	02	02	02	03	00	06	01	0B	02	02	02	03	00	06	01	0B	02	02	03	00
464.400	02	02	04	04	02	03	00	02	02	09	02	02	03	00	02	02	0A	02	02	02	03	00	0A	01	0B	02	02	02	03	00	0A	01	0B	02	02	03	00
464.425	02	02	04	04	02	03	00	04	02	09	02	02	03	00	04	02	0A	02	02	02	03	00	0C	01	0B	02	02	02	03	00	0C	01	0B	02	02	03	00
464.450	04	02	04	04	02	03	00	06	02	09	02	02	03	00	06	02	0A	02	02	02	03	00	0E	01	0B	02	02	02	03	00	0E	01	0B	02	02	03	00
464.475	06	02	04	04	02	03	00	08	02	09	02	02	03	00	08	02	0A	02	02	02	03	00	02	01	0B	02	02	02	03	00	02	01	0B	02	02	03	00
464.500	08	02	04	04	02	03	00	0A	02	09	02	02	03	00	0A	02	0A	02	02	02	03	00	02	01	0B	02	02	02	03	00	02	01	0B	02	02	03	00
464.525	0A	02	04	04	02	03	00	0C	02	09	02	02	03	00	0C	02	0A	02	02	02	03	00	04	02	0B	02	02	02	03	00	04	02	0B	02	02	03	00
464.550	0C	02	04	04	02	03	00	0E	02	09	02	02	03	00	0E	02	0A	02	02	02	03	00	06	02	0B	02	02	02	03	00	06	02	0B	02	02	03	00
464.575	0E	02	04	04	02	03	00	01	03	09	02	02	03	00	01	03	0A	02	02	02	03	00	08	02	0B	02	02	02	03	00	08	02	0B	02	02	03	00
464.600	03	04	04	04	02	03	00	02	03	09	02	02	03	00	02	03	0A	02	02	02	03	00	0A	02	0B	02	02	02	03	00	0A	02	0B	02	02	03	00
464.625	02	03	04	04	02	03	00	04	03	09	02	02	03	00	04	03	0A	02	02	02	03	00	0E	02	0B	02	02	02	03	00	0E	02	0B	02	02	03	00
464.650	04	03	04	04	02	03	00	06	04	09	02	02	03	00	06	04	0A	02	02	02	03	00	02	03	0B	02	02	02	03	00	02	03	0B	02	02	03	00
464.675	06	03	04	04	02	03	00	08	04	09	02	02	03	00	08	04	0A	02	02	02	03	00	04	03	0B	02	02	02	03	00	04	03	0B	02	02	03	00
464.700	08	03	04	04	02	03	00	0A	03	09	02	02	03	00	0A	03	0A	02	02	02	03	00	06	04	0B	02	02	02	03	00	06	04	0B	02	02	03	00
464.725	0A	03	04	04	02	03	00	0C	03	09	02	02	03	00	0C	03	0A	02	02	02	03	00	08	04	0B	02	02	02	03	00	08	04	0B	02	02	03	00
464.750	0C	03	04	04	02	03	00	0E	03	09	02	02	03	00	0E	03	0A	02	02	02	03	00	0A	03	0B	02	02	02	03	00	0A	03	0B	02	02	03	00
464.775	0E	03	04	04	02	03	00	01	04	09	02	02	03	00	01	04	0A	02	02	02	03	00	06	04	0B	02	02	02	03	00	06	04	0B	02	02	03	00
464.800	00	05	04	04	02	03	00	02	00	0A	02	02	03	00	02	00	0A	02	02	02	03	00	08	04	0B	02	02	02	03	00	08	04	0B	02	02	03	00
464.825	02	00	05	04	02	03	00	04	00	0A	02	02	03	00	04	00	0A	02	02	02	03	00	0A	03	0B	02	02	02	03	00	0A	03	0B	02	02	03	00
464.850	04	00	05	04	02	03	00	06	00	0A	02	02	03	00	06	00	0A	02	02	02	03	00	0E	03	0B	02	02	02	03	00	0E	03	0B	02	02	03	00
464.875	06	00	05	04	02	03	00	08	00	0A	02	02	03	00	08	00	0A	02	02	02	03	00	06	04	0B	02	02	02	03	00	06	04	0B	02	02	03	00
464.900	08	00	05	04	02	03	00	0A	00	0A	02	02	03	00	0A	00	0A	02	02	02	03	00	08	04	0B	02	02	02	03	00	08	04	0B	02	02	03	00
464.925	0A	00	05	04	02	03	00	0C	00	0A	02	02	03	00	0C	00	0A	02	02	02	03	00	0A	00	0B	02	02	02	03	00	0A	00	0B	02	02	03	00
464.950	0C	01	06	04	02	03	00	0E	01	0A	02	02	03	00	0E	01	0A	02	02	02	03	00	06	04	0B	02	02	02	03	00	06	04	0B	02	02	03	00
464.975	0E	01	06	04	02	03	00	01	02	0A	02	02	03	00	01	02	0A	02	02	02	03	00	08	04	0B	02	02	02	03	00	08	04	0B	02	02	03	00
465.000	00	01	06	04	02	03	00	03	00	0A	02	02	03	00	03	00	0A	02	02	02	03	00	0A	00	0B	02	02	02	03	00	0A	00	0B	02	02	03	00
465.025	02	00	06	04	02	03	00	05	00	0A	02	02	03	00	05	00	0A	02	02	02	03	00	06	04	0B	02	02	02	03	00	06	04	0B	02	02	03	00
465.050	04	00	06	04	02	03	00	07	00	0A	02	02	03	00	07	00	0A	02	02	02	03	00	08	04	0B	02	02	02	03	00	08	04	0B	02	02	03	00
465.075	06	00	06	04	02	03	00	09	00	0A	02	02	03	00	09	00	0A	02	02	02	03	00	0A	00	0B	02	02	02	03	00	0A	00	0B	02	02	03	00
465.100	08	00	06	04	02	03</																															

F (MHz)	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	8	9	A	B	C	D	E	F			8	9	A	B	C	D	E	F		
467.000	00	03	07	04	02	0C	03	00			00	03	0C	02	02	0C	03	00		
467.025	02	03	07	04	02	0C	03	00			02	03	0C	02	02	0C	03	00		
467.050	04	03	07	04	02	0C	03	00			04	03	0C	02	02	0C	03	00		
467.075	06	03	07	04	02	0C	03	00			06	03	0C	02	02	0C	03	00		
467.100	08	03	07	04	02	0C	03	00			08	03	0C	02	02	0C	03	00		
467.125	0A	03	07	04	02	0C	03	00			0A	03	0C	02	02	0C	03	00		
467.150	0C	03	07	04	02	0C	03	00			0C	03	0C	02	02	0C	03	00		
467.175	0E	03	07	04	02	0C	03	00			0E	03	0C	02	02	0C	03	00		
467.200	00	00	08	04	02	0C	03	00			00	00	0D	02	02	0C	03	00		
467.225	02	00	08	04	02	0C	03	00			02	00	0D	02	02	0C	03	00		
467.250	04	00	08	04	02	0C	03	00			04	00	0D	02	02	0C	03	00		
467.275	06	00	08	04	02	0C	03	00			06	00	0D	02	02	0C	03	00		
467.300	08	00	08	04	02	0C	03	00			08	00	0D	02	02	0C	03	00		
467.325	0A	00	08	04	02	0C	03	00			0A	00	0D	02	02	0C	03	00		
467.350	0C	00	08	04	02	0C	03	00			0C	00	0D	02	02	0C	03	00		
467.375	0E	00	08	04	02	0C	03	00			0E	00	0D	02	02	0C	03	00		
467.400	01	08	04	02	0C	03	00	00			00	01	0D	02	02	0C	03	00		
467.425	02	01	08	04	02	0C	03	00			02	01	0D	02	02	0C	03	00		
467.450	04	01	08	04	02	0C	03	00			04	01	0D	02	02	0C	03	00		
467.475	06	01	08	04	02	0C	03	00			06	01	0D	02	02	0C	03	00		
467.500	08	01	08	04	02	0C	03	00			08	01	0D	02	02	0C	03	00		
467.525	0A	01	08	04	02	0C	03	00			0A	01	0D	02	02	0C	03	00		
467.550	0C	01	08	04	02	0C	03	00			0C	01	0D	02	02	0C	03	00		
467.575	0E	01	08	04	02	0C	03	00			0E	01	0D	02	02	0C	03	00		
467.600	00	01	08	04	02	0C	03	00			00	02	0D	02	02	0C	03	00		
467.625	02	02	08	04	02	0C	03	00			02	02	0D	02	02	0C	03	00		
467.650	04	02	08	04	02	0C	03	00			04	02	0D	02	02	0C	03	00		
467.675	06	02	08	04	02	0C	03	00			06	02	0D	02	02	0C	03	00		
467.700	08	02	08	04	02	0C	03	00			08	02	0D	02	02	0C	03	00		
467.725	0A	02	08	04	02	0C	03	00			0A	02	0D	02	02	0C	03	00		
467.750	0C	02	08	04	02	0C	03	00			0C	02	0D	02	02	0C	03	00		
467.775	0E	02	08	04	02	0C	03	00			0E	02	0D	02	02	0C	03	00		
467.800	00	03	08	04	02	0C	03	00			00	03	0D	02	02	0C	03	00		
467.825	02	03	08	04	02	0C	03	00			02	03	0D	02	02	0C	03	00		
467.850	04	03	08	04	02	0C	03	00			04	03	0D	02	02	0C	03	00		
467.875	06	03	08	04	02	0C	03	00			06	03	0D	02	02	0C	03	00		
467.900	08	03	08	04	02	0C	03	00			08	03	0D	02	02	0C	03	00		
467.925	0A	03	08	04	02	0C	03	00			0A	03	0D	02	02	0C	03	00		
467.950	0C	03	08	04	02	0C	03	00			0C	03	0D	02	02	0C	03	00		
468.000	00	00	09	04	02	0C	03	00			00	00	0E	02	02	0C	03	00		
468.025	02	00	09	04	02	0C	03	00			02	00	0E	02	02	0C	03	00		
468.050	04	00	09	04	02	0C	03	00			04	00	0E	02	02	0C	03	00		
468.075	06	00	09	04	02	0C	03	00			06	00	0E	02	02	0C	03	00		
468.100	08	00	09	04	02	0C	03	00			08	00	0E	02	02	0C	03	00		
468.125	0A	00	09	04	02	0C	03	00			0A	00	0E	02	02	0C	03	00		
468.150	0C	00	09	04	02	0C	03	00			0C	00	0E	02	02	0C	03	00		
468.175	0E	00	09	04	02	0C	03	00			0E	00	0E	02	02	0C	03	00		
468.200	00	01	09	04	02	0C	03	00			00	01	0E	02	02	0C	03	00		
468.225	02	01	09	04	02	0C	03	00			02	01	0E	02	02	0C	03	00		
468.250	04	01	09	04	02	0C	03	00			04	01	0E	02	02	0C	03	00		
468.275	06	01	09	04	02	0C	03	00			06	01	0E	02	02	0C	03	00		
468.300	08	01	09	04	02	0C	03	00			08	01	0E	02	02	0C	03	00		
468.325	0A	01	09	04	02	0C	03	00			0A	01	0E	02	02	0C	03	00		
468.350	0C	01	09	04	02	0C	03	00			0C	01	0E	02	02	0C	03	00		
468.375	0E	01	09	04	02	0C	03	00			0E	01	0E	02	02	0C	03	00		
468.400	00	02	09	04	02	0C	03	00			00	02	0E	02	02	0C	03	00		
468.425	02	02	09	04	02	0C	03	00			02	02	0E	02	02	0C	03	00		
468.450	04	02	09	04	02	0C	03	00			04	02	0E	02	02	0C	03	00		
468.475	06	02	09	04	02	0C	03	00			06	02	0E	02	02	0C	03	00		

***D F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM							UHF TX PROGRAM							UHF RX PROGRAM																		
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7																		
	8	9	A	B	C	D	E	F							8	9	A	B	C	D	E	F						8	9	A	B	C	D	E	F					
470.000	00	02	0B	04	02	0C	03	00	00	02	00	03	02	0C	03	00	08	01	02	03	02	0C	03	00	0A	01	02	03	02	0C	03	00	08	01	02	03	02	0C	03	00
470.025	02	02	0B	04	02	0C	03	00	02	02	00	03	02	0C	03	00	04	01	02	03	02	0C	03	00	0A	01	02	03	02	0C	03	00	04	01	02	03	02	0C	03	00
470.050	04	02	0B	04	02	0C	03	00	04	02	00	03	02	0C	03	00	06	02	00	03	02	0C	03	00	0C	01	02	03	02	0C	03	00	0C	01	02	03	02	0C	03	00
470.075	06	02	0B	04	02	0C	03	00	06	02	00	03	02	0C	03	00	08	02	00	03	02	0C	03	00	0E	01	02	03	02	0C	03	00	0E	01	02	03	02	0C	03	00
470.100	08	02	0B	04	02	0C	03	00	08	02	00	03	02	0C	03	00	0A	02	00	03	02	0C	03	00	00	02	02	03	02	0C	03	00	00	02	02	03	02	0C	03	00
470.125	0A	02	0B	04	02	0C	03	00	0A	02	00	03	02	0C	03	00	0C	02	00	03	02	0C	03	00	02	02	02	03	02	0C	03	00	02	02	02	03	02	0C	03	00
470.150	0C	02	0B	04	02	0C	03	00	0C	02	00	03	02	0C	03	00	0E	02	00	03	02	0C	03	00	05	02	02	03	02	0C	03	00	05	02	02	03	02	0C	03	00
470.175	0E	02	0B	04	02	0C	03	00	0E	02	00	03	02	0C	03	00	00	03	00	03	02	0C	03	00	08	02	02	03	02	0C	03	00	08	02	02	03	02	0C	03	00
470.200	00	03	0B	04	02	0C	03	00	02	03	00	03	02	0C	03	00	02	03	00	03	02	0C	03	00	0A	02	02	03	02	0C	03	00	0A	02	02	03	02	0C	03	00
470.225	02	03	0B	04	02	0C	03	00	04	03	00	03	02	0C	03	00	04	03	00	03	02	0C	03	00	0C	02	02	03	02	0C	03	00	0C	02	02	03	02	0C	03	00
470.250	04	03	0B	04	02	0C	03	00	06	03	00	03	02	0C	03	00	06	03	00	03	02	0C	03	00	0E	02	02	03	02	0C	03	00	0E	02	02	03	02	0C	03	00
470.275	06	03	0B	04	02	0C	03	00	08	03	00	03	02	0C	03	00	08	03	00	03	02	0C	03	00	00	03	02	03	02	0C	03	00	00	03	02	03	02	0C	03	00
470.300	08	03	0B	04	02	0C	03	00	0A	03	00	03	02	0C	03	00	0A	03	00	03	02	0C	03	00	02	03	02	03	02	0C	03	00	02	03	02	03	02	0C	03	00
470.325	0A	03	0B	04	02	0C	03	00	0C	03	00	03	02	0C	03	00	0C	03	00	03	02	0C	03	00	06	03	02	03	02	0C	03	00	06	03	02	03	02	0C	03	00
470.350	0C	03	0B	04	02	0C	03	00	0E	03	00	03	02	0C	03	00	0E	03	00	03	02	0C	03	00	08	03	02	03	02	0C	03	00	08	03	02	03	02	0C	03	00
470.375	0E	03	0B	04	02	0C	03	00	00	03	00	03	02	0C	03	00	00	03	00	03	02	0C	03	00	0A	03	02	03	02	0C	03	00	0A	03	02	03	02	0C	03	00
470.400	00	00	0C	04	02	0C	03	00	02	00	01	03	02	0C	03	00	04	00	01	03	02	0C	03	00	0C	03	02	03	02	0C	03	00	0C	03	02	03	02	0C	03	00
470.425	02	00	0C	04	02	0C	03	00	04	00	01	03	02	0C	03	00	06	00	01	03	02	0C	03	00	0E	03	02	03	02	0C	03	00	0E	03	02	03	02	0C	03	00
470.450	04	00	0C	04	02	0C	03	00	06	00	01	03	02	0C	03	00	08	00	01	03	02	0C	03	00	00	03	02	03	02	0C	03	00	00	03	02	03	02	0C	03	00
470.475	06	00	0C	04	02	0C	03	00	08	00	01	03	02	0C	03	00	0A	00	01	03	02	0C	03	00	02	00	03	02	0C	03	00	02	00	03	02	03	02	0C	03	00
470.500	08	00	0C	04	02	0C	03	00	0A	00	01	03	02	0C	03	00	0C	00	01	03	02	0C	03	00	04	00	03	02	0C	03	00	04	00	03	02	03	02	0C	03	00
470.525	0A	00	0C	04	02	0C	03	00	0C	00	01	03	02	0C	03	00	0E	00	01	03	02	0C	03	00	06	00	03	02	0C	03	00	06	00	03	02	03	02	0C	03	00
470.550	0C	00	0C	04	02	0C	03	00	0E	00	01	03	02	0C	03	00	00	00	01	03	02	0C	03	00	08	00	03	02	0C	03	00	08	00	03	02	03	02	0C	03	00
470.575	0E	00	0C	04	02	0C	03	00	00	00	01	03	02	0C	03	00	02	00	01	03	02	0C	03	00	0A	00	03	02	0C	03	00	0A	00	03	02	03	02	0C	03	00
470.600	00	01	0C	04	02	0C	03	00	02	01	01	03	02	0C	03	00	04	00	01	03	02	0C	03	00	0C	00	03	02	0C	03	00	0C	00	03	02	03	02	0C	03	00
470.625	02	01	0C	04	02	0C	03	00	04	01	01	03	02	0C	03	00	06	01	01	03	02	0C	03	00	0E	00	03	02	0C	03	00	0E	00	03	02	03	02	0C	03	00
470.650	04	01	0C	04	02	0C	03	00	06	01	01	03	02	0C	03	00	08	01	01	03	02	0C	03	00	00	01	03	02	0C	03	00	00	01	03	02	03	02	0C	03	00
470.675	06	01	0C	04	02	0C	03	00	08	01	01	03	02	0C	03	00	0A	01	01	03	02	0C	03	00	02	00	03	02	0C	03	00	02	00	03	02	03	02	0C	03	00
470.700	08	01	0C	04	02	0C	03	00	0A	01	01	03	02	0C	03	00	0C	00	01	03	02	0C	03	00	04	00	03	02	0C	03	00	04	00	03	02	03	02	0C	03	00
470.725	0A	01	0C	04	02	0C	03	00	0C	01	01	03	02	0C	03	00	0E	01	01	03	02	0C	03	00	06	01	03	02	0C	03	00	06	01	03	02	03	02	0C	03	00
470.750	0C	01	0C	04	02	0C	03	00	0E	01	01	03	02	0C	03	00	00	02	01	03	02	0C	03	00	08	01	03	02	0C	03	00	08	01	03	02	03	02	0C	03	00
470.775	0E	01	0C	04	02	0C	03	00	00	02	01	03	02	0C	03	00	04	02	01	03	02	0C	03	00	0A	01	03	02	0C	03	00	0A	01	03	02	03	02	0C	03	00
470.800	00	02	0C	04	02	0C	03	00	04	02	01	03	02	0C	03	00	06	02	01	03	02	0C	03	00	0C	00	03	02	0C	03	00	0C	00	03	02	03	02	0C	03	00
470.825	02	02	0C	04	02	0C	03	00	06	02	01	03	02	0C	03	00	08	02	01	03	02	0C	03	00	0E	01	03	02	0C	03	00	0E	01	03	02	03	02	0C	03	00
470.850	04	02	0C	04	02	0C	03	00	08	02	01	03	02	0C	03	00	0A	02	01	03	02	0C	03	00	00	02	03	02	0C	03	00	00	02	03	02	03	02	0C	03	00
470.875	06	02	0C	04	02	0C	03	00	0A	02	01	03	02	0C	03	00	0C	02	01																					

***D	UHF TX PROGRAM								UHF RX PROGRAM							
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7
473.000	00	01	0F	04	02	0C	03	00	00	01	04	03	02	0C	03	00
473.025	02	01	0F	04	02	0C	03	00	02	01	04	03	02	0C	03	00
473.050	04	01	0F	04	02	0C	03	00	04	01	04	03	02	0C	03	00
473.075	06	01	0F	04	02	0C	03	00	06	01	04	03	02	0C	03	00
473.100	08	01	0F	04	02	0C	03	00	08	01	04	03	02	0C	03	00
473.125	0A	01	0F	04	02	0C	03	00	0A	01	04	03	02	0C	03	00
473.150	0C	01	0F	04	02	0C	03	00	0C	01	04	03	02	0C	03	00
473.175	0E	01	0F	04	02	0C	03	00	0E	01	04	03	02	0C	03	00
473.200	00	02	0F	04	02	0C	03	00	00	02	04	03	02	0C	03	00
473.225	02	02	0F	04	02	0C	03	00	02	02	04	03	02	0C	03	00
473.250	04	02	0F	04	02	0C	03	00	04	02	04	03	02	0C	03	00
473.275	06	02	0F	04	02	0C	03	00	06	02	04	03	02	0C	03	00
473.300	08	02	0F	04	02	0C	03	00	08	02	04	03	02	0C	03	00
473.325	0A	02	0F	04	02	0C	03	00	0A	02	04	03	02	0C	03	00
473.350	0C	02	0F	04	02	0C	03	00	0C	02	04	03	02	0C	03	00
473.375	0E	02	0F	04	02	0C	03	00	0E	02	04	03	02	0C	03	00
473.400	00	03	0F	04	02	0C	03	00	00	03	04	03	02	0C	03	00
473.425	02	03	0F	04	02	0C	03	00	02	03	04	03	02	0C	03	00
473.450	04	03	0F	04	02	0C	03	00	04	03	04	03	02	0C	03	00
473.475	06	03	0F	04	02	0C	03	00	06	03	04	03	02	0C	03	00
473.500	08	03	0F	04	02	0C	03	00	08	03	04	03	02	0C	03	00
473.525	0A	03	0F	04	02	0C	03	00	0A	03	04	03	02	0C	03	00
473.550	0C	03	0F	04	02	0C	03	00	0C	03	04	03	02	0C	03	00
473.575	0E	03	0F	04	02	0C	03	00	0E	03	04	03	02	0C	03	00
473.600	00	00	05	02	0C	03	00	00	00	05	03	02	0C	03	00	00
473.625	02	00	05	02	0C	03	00	02	00	05	03	02	0C	03	00	02
473.650	04	00	05	02	0C	03	00	04	00	05	03	02	0C	03	00	04
473.675	06	00	05	02	0C	03	00	06	00	05	03	02	0C	03	00	06
473.700	08	00	05	02	0C	03	00	08	00	05	03	02	0C	03	00	08
473.725	0A	00	05	02	0C	03	00	0A	00	05	03	02	0C	03	00	0A
473.750	0C	00	05	02	0C	03	00	0C	00	05	03	02	0C	03	00	0C
473.775	0E	00	05	02	0C	03	00	0E	00	05	03	02	0C	03	00	0E
473.800	00	01	05	02	0C	03	00	00	01	05	03	02	0C	03	00	00
473.825	02	01	05	02	0C	03	00	02	01	05	03	02	0C	03	00	02
473.850	04	01	05	02	0C	03	00	04	01	05	03	02	0C	03	00	04
473.875	06	01	05	02	0C	03	00	06	01	05	03	02	0C	03	00	06
473.900	08	01	05	02	0C	03	00	08	01	05	03	02	0C	03	00	08
473.925	0A	01	05	02	0C	03	00	0A	01	05	03	02	0C	03	00	0A
473.950	0C	01	05	02	0C	03	00	0C	01	05	03	02	0C	03	00	0C
473.975	0E	01	05	02	0C	03	00	0E	01	05	03	02	0C	03	00	0E
474.000	00	02	05	02	0C	03	00	00	02	05	03	02	0C	03	00	00
474.025	02	02	05	02	0C	03	00	02	02	05	03	02	0C	03	00	02
474.050	04	02	05	02	0C	03	00	04	02	05	03	02	0C	03	00	04
474.075	06	02	05	02	0C	03	00	06	02	05	03	02	0C	03	00	06
474.100	08	02	05	02	0C	03	00	08	02	05	03	02	0C	03	00	08
474.125	0A	02	05	02	0C	03	00	0A	02	05	03	02	0C	03	00	0A
474.150	0C	02	05	02	0C	03	00	0C	02	05	03	02	0C	03	00	0C
474.175	0E	02	05	02	0C	03	00	0E	02	05	03	02	0C	03	00	0E
474.200	00	03	05	02	0C	03	00	00	03	05	03	02	0C	03	00	00
474.225	02	03	05	02	0C	03	00	02	03	05	03	02	0C	03	00	02
474.250	04	03	05	02	0C	03	00	04	03	05	03	02	0C	03	00	04
474.275	06	03	05	02	0C	03	00	06	03	05	03	02	0C	03	00	06
474.300	08	03	05	02	0C	03	00	08	03	05	03	02	0C	03	00	08
474.325	0A	03	05	02	0C	03	00	0A	03	05	03	02	0C	03	00	0A
474.350	0C	03	05	02	0C	03	00	0C	03	05	03	02	0C	03	00	0C
474.375	0E	03	05	02	0C	03	00	0E	03	05	03	02	0C	03	00	0E
474.400	00	00	01	05	02	0C	03	00	00	00	06	03	02	0C	03	00
474.425	02	00	01	05	02	0C	03	00	02	00	06	03	02	0C	03	00
474.450	04	00	01	05	02	0C	03	00	04	00	06	03	02	0C	03	00
474.475	06	00	01	05	02	0C	03	00	06	00	06	03	02	0C	03	00

***D F (MHz)	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	8 9 A B C D E F										8 9 A B C D E F									
476.000	00	00	03	05	02	0C	03	00			00	00	08	03	02	0C	02	00		
476.025	02	00	03	05	02	0C	03	00			04	00	08	03	02	0C	03	00		
476.050	04	00	03	05	02	0C	03	00			02	00	08	03	02	0C	03	00		
476.075	06	00	03	05	02	0C	03	00			06	00	08	03	02	0C	03	00		
476.100	08	00	03	05	02	0C	03	00			08	00	08	03	02	0C	03	00		
476.125	0A	00	03	05	02	0C	03	00			0A	00	08	03	02	0C	03	00		
476.150	0C	00	03	05	02	0C	03	00			0C	00	08	03	02	0C	03	00		
476.175	0E	00	03	05	02	0C	03	00			0E	00	08	03	02	0C	03	00		
476.200	00	01	03	05	02	0C	03	00			00	01	08	03	02	0C	03	00		
476.225	02	01	03	05	02	0C	03	00			02	01	08	03	02	0C	03	00		
476.250	04	01	03	05	02	0C	03	00			04	01	08	03	02	0C	03	00		
476.275	06	01	03	05	02	0C	03	00			06	01	08	03	02	0C	03	00		
476.300	08	01	03	05	02	0C	03	00			08	01	08	03	02	0C	03	00		
476.325	0A	01	03	05	02	0C	03	00			0A	01	08	03	02	0C	03	00		
476.350	0C	01	03	05	02	0C	03	00			0C	01	08	03	02	0C	03	00		
476.375	0E	01	03	05	02	0C	03	00			0E	01	08	03	02	0C	03	00		
476.400	00	02	03	05	02	0C	03	00			00	02	08	03	02	0C	03	00		
476.425	02	02	03	05	02	0C	03	00			02	02	08	03	02	0C	03	00		
476.450	04	02	03	05	02	0C	03	00			04	02	08	03	02	0C	03	00		
476.475	06	02	03	05	02	0C	03	00			06	02	08	03	02	0C	03	00		
476.500	08	02	03	05	02	0C	03	00			08	02	08	03	02	0C	03	00		
476.525	0A	02	03	05	02	0C	03	00			0A	02	08	03	02	0C	03	00		
476.550	0C	02	03	05	02	0C	03	00			0C	02	08	03	02	0C	03	00		
476.575	0E	02	03	05	02	0C	03	00			0E	02	08	03	02	0C	03	00		
476.600	00	03	05	02	0C	03	00				00	03	08	03	02	0C	03	00		
476.625	02	03	05	02	0C	03	00				02	03	08	03	02	0C	03	00		
476.650	04	03	05	02	0C	03	00				04	03	08	03	02	0C	03	00		
476.675	06	03	05	02	0C	03	00				06	03	08	03	02	0C	03	00		
476.700	08	03	05	02	0C	03	00				08	03	08	03	02	0C	03	00		
476.725	0A	03	05	02	0C	03	00				0A	03	08	03	02	0C	03	00		
476.750	0C	03	05	02	0C	03	00				0C	03	08	03	02	0C	03	00		
476.775	0E	03	05	02	0C	03	00				0E	03	08	03	02	0C	03	00		
476.800	00	04	05	02	0C	03	00				00	04	09	03	02	0C	03	00		
476.825	02	04	05	02	0C	03	00				02	04	09	03	02	0C	03	00		
476.850	04	04	05	02	0C	03	00				04	04	09	03	02	0C	03	00		
476.875	06	04	05	02	0C	03	00				06	04	09	03	02	0C	03	00		
476.900	08	04	05	02	0C	03	00				08	04	09	03	02	0C	03	00		
476.925	0A	04	05	02	0C	03	00				0A	04	09	03	02	0C	03	00		
476.950	0C	04	05	02	0C	03	00				0C	04	09	03	02	0C	03	00		
477.000	00	05	02	0C	03	00					00	05	09	03	02	0C	03	00		
477.025	02	05	02	0C	03	00					02	05	09	03	02	0C	03	00		
477.050	04	05	02	0C	03	00					04	05	09	03	02	0C	03	00		
477.075	06	05	02	0C	03	00					06	05	09	03	02	0C	03	00		
477.100	08	05	02	0C	03	00					08	05	09	03	02	0C	03	00		
477.125	0A	05	02	0C	03	00					0A	05	09	03	02	0C	03	00		
477.150	0C	05	02	0C	03	00					0C	05	09	03	02	0C	03	00		
477.175	0E	05	02	0C	03	00					0E	05	09	03	02	0C	03	00		
477.200	00	06	05	02	0C	03	00				00	06	09	03	02	0C	03	00		
477.225	02	06	05	02	0C	03	00				02	06	09	03	02	0C	03	00		
477.250	04	06	05	02	0C	03	00				04	06	09	03	02	0C	03	00		
477.275	06	06	05	02	0C	03	00				06	06	09	03	02	0C	03	00		
477.300	08	06	05	02	0C	03	00				08	06	09	03	02	0C	03	00		
477.325	0A	06	05	02	0C	03	00				0A	06	09	03	02	0C	03	00		
477.350	0C	06	05	02	0C	03	00				0C	06	09	03	02	0C	03	00		
477.375	0E	06	05	02	0C	03	00				0E	06	09	03	02	0C	03	00		
477.400	00	07	06	05	02	0C	03	00			00	07	09	03	02	0C	03	00		
477.425	02	07	06	05	02	0C	03	00			02	07	09	03	02	0C	03	00		
477.450	04	07	06	05	02	0C	03	00			04	07	09	03	02	0C	03	00		
477.475	06	07	06	05	02	0C	03	00			06	07	09	03	02	0C	03	00		

[illegible]

***E	UHF TX PROGRAM							UHF RX PROGRAM							UHF RX PROGRAM									
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
480.000	00	00	08	05	02	0C	03	00	00	00	03	02	0C	03	00	00	00	03	02	0C	03	00	00	00
480.025	02	00	08	05	02	0C	03	00	02	00	0D	03	02	0C	03	00	0A	03	0E	03	02	0C	03	00
480.050	04	00	08	05	02	0C	03	00	04	00	0D	03	02	0C	03	00	0C	03	0E	03	02	0C	03	00
480.075	06	00	08	05	02	0C	03	00	06	00	0D	03	02	0C	03	00	0E	03	0E	03	02	0C	03	00
480.100	08	00	08	05	02	0C	03	00	08	00	0D	03	02	0C	03	00	00	00	0F	03	02	0C	03	00
480.125	0A	00	08	05	02	0C	03	00	0A	00	0D	03	02	0C	03	00	02	00	0F	03	02	0C	03	00
480.150	0C	00	08	05	02	0C	03	00	0C	00	0D	03	02	0C	03	00	04	00	0F	03	02	0C	03	00
480.175	0E	00	08	05	02	0C	03	00	0E	00	0D	03	02	0C	03	00	06	00	0F	03	02	0C	03	00
480.200	00	01	08	05	02	0C	03	00	00	01	0D	03	02	0C	03	00	08	00	0F	03	02	0C	03	00
480.225	02	01	08	05	02	0C	03	00	02	01	0D	03	02	0C	03	00	0A	00	0F	03	02	0C	03	00
480.250	04	01	08	05	02	0C	03	00	04	01	0D	03	02	0C	03	00	0C	00	0F	03	02	0C	03	00
480.275	06	01	08	05	02	0C	03	00	06	01	0D	03	02	0C	03	00	0E	00	0F	03	02	0C	03	00
480.300	08	01	08	05	02	0C	03	00	08	01	0D	03	02	0C	03	00	00	01	0F	03	02	0C	03	00
480.325	0A	01	08	05	02	0C	03	00	0A	01	0D	03	02	0C	03	00	02	01	0F	03	02	0C	03	00
480.350	0C	01	08	05	02	0C	03	00	0C	01	0D	03	02	0C	03	00	04	01	0F	03	02	0C	03	00
480.375	0E	01	08	05	02	0C	03	00	0E	01	0D	03	02	0C	03	00	06	01	0F	03	02	0C	03	00
480.400	00	02	08	05	02	0C	03	00	00	02	0D	03	02	0C	03	00	08	01	0F	03	02	0C	03	00
480.425	02	02	08	05	02	0C	03	00	02	02	0D	03	02	0C	03	00	0A	01	0F	03	02	0C	03	00
480.450	04	02	08	05	02	0C	03	00	04	02	0D	03	02	0C	03	00	0C	01	0F	03	02	0C	03	00
480.475	06	02	08	05	02	0C	03	00	06	02	0D	03	02	0C	03	00	0E	01	0F	03	02	0C	03	00
480.500	08	02	08	05	02	0C	03	00	08	02	0D	03	02	0C	03	00	00	02	0F	03	02	0C	03	00
480.525	0A	02	08	05	02	0C	03	00	0A	02	0D	03	02	0C	03	00	02	02	0F	03	02	0C	03	00
480.550	0C	02	08	05	02	0C	03	00	0C	02	0D	03	02	0C	03	00	04	02	0F	03	02	0C	03	00
480.575	0E	02	08	05	02	0C	03	00	0E	02	0D	03	02	0C	03	00	06	02	0F	03	02	0C	03	00
480.600	00	03	08	05	02	0C	03	00	00	03	0D	03	02	0C	03	00	08	02	0F	03	02	0C	03	00
480.625	02	03	08	05	02	0C	03	00	02	03	0D	03	02	0C	03	00	0A	02	0F	03	02	0C	03	00
480.650	04	03	08	05	02	0C	03	00	04	03	0D	03	02	0C	03	00	0C	02	0F	03	02	0C	03	00
480.675	06	03	08	05	02	0C	03	00	06	03	0D	03	02	0C	03	00	0E	02	0F	03	02	0C	03	00
480.700	08	03	08	05	02	0C	03	00	08	03	0D	03	02	0C	03	00	00	03	0F	03	02	0C	03	00
480.725	0A	03	08	05	02	0C	03	00	0A	03	0D	03	02	0C	03	00	02	03	0F	03	02	0C	03	00
480.750	0C	03	08	05	02	0C	03	00	0C	03	0D	03	02	0C	03	00	04	03	0F	03	02	0C	03	00
480.775	0E	03	08	05	02	0C	03	00	0E	03	0D	03	02	0C	03	00	06	03	0F	03	02	0C	03	00
480.800	00	04	08	05	02	0C	03	00	00	00	0E	03	02	0C	03	00	08	03	0F	03	02	0C	03	00
480.825	02	04	08	05	02	0C	03	00	02	00	0E	03	02	0C	03	00	0A	03	0F	03	02	0C	03	00
480.850	04	04	08	05	02	0C	03	00	04	00	0E	03	02	0C	03	00	0C	03	0F	03	02	0C	03	00
480.875	06	04	08	05	02	0C	03	00	06	00	0E	03	02	0C	03	00	0E	03	0F	03	02	0C	03	00
480.900	08	04	08	05	02	0C	03	00	08	00	0E	03	02	0C	03	00	00	00	00	04	02	0C	03	00
480.925	0A	04	08	05	02	0C	03	00	0A	00	0E	03	02	0C	03	00	02	00	00	04	02	0C	03	00
480.950	0C	04	08	05	02	0C	03	00	0C	00	0E	03	02	0C	03	00	04	00	00	04	02	0C	03	00
480.975	0E	04	08	05	02	0C	03	00	0E	00	0E	03	02	0C	03	00	06	00	00	04	02	0C	03	00
481.000	00	05	08	05	02	0C	03	00	00	01	0E	03	02	0C	03	00	08	00	00	04	02	0C	03	00
481.025	02	05	08	05	02	0C	03	00	02	01	0E	03	02	0C	03	00	0A	00	00	04	02	0C	03	00
481.050	04	05	08	05	02	0C	03	00	04	01	0E	03	02	0C	03	00	0C	00	00	04	02	0C	03	00
481.075	06	05	08	05	02	0C	03	00	06	01	0E	03	02	0C	03	00	0E	01	00	04	02	0C	03	00
481.100	08	05	08	05	02	0C	03	00	08	01	0E	03	02	0C	03	00	00	01	00	04	02	0C	03	00
481.125	0A	05	08	05	02	0C	03	00	0A	01	0E	03	02	0C	03	00	0A	01	00	04	02	0C	03	00
481.150	0C	05	08	05	02	0C	03	00	0C	01	0E	03	02	0C	03	00	0C	01	00	04	02	0C	03	00
481.175	0E	05	08	05	02	0C	03	00	0E	01	0E	03	02	0C	03	00	0E	01	00	04	02	0C	03	00
481.200	00	06	08	05	02	0C	03	00	00	02	0E	03	02	0C	03	00	06	01	00	04	02	0C	03	00
481.225	02	06	08	05	02	0C	03	00	02	02	0E	03	02	0C	03	00	08	01	00	04	02	0C	03	00
481.250	04	06	08	05	02	0C	03	00	04	02	0E	03	02	0C	03	00	0C	01	00	04	02	0C	03	00
481.275	06	06	08	05	02	0C	03	00	06	02	0E	03	02	0C	03	00	0E	01	00	04	02	0C	03	00
481.300	08	06	08	05	02	0C	03	00	08	02	0E	03	02	0C	03	00	00	02	00	04	02	0C	03	00
481.325	0A	06	08	05	02	0C	03	00	0A	02	0E	03	02	0C	03	00	02	02	00	04	02	0C	03	00
481.350	0C	06	08	05	02	0C	03	00	0C	02	0E	03	02	0C	03	00	04	02	00	04	02	0C	03	00
481.375	0E	06	08	05	02	0C	03	00	0E	02	0E	03	02	0C	03	00	06	02	00	04	02	0C	03	00
481.400	00	07	08	05	02	0C	03	00	00	03	0E	03	02	0C	03	00	0A	02	00	04	02	0C	03	00
481.425	02	07	08	05	02	0C	03	00	02	03	0E	03	02	0C	03	00	0C	02	00	04	02	0C	03	00
481.450	04	07	08	05	02	0C	03	00	04	03	0E	03	02	0C	03	00	0E	02	00	04	02	0C	03	00
481.475	06	07	08	05	02	0C	03	00	06	03	0E	03	02	0C	03	00	0E	02	00	04	02	0C	03	00

***E	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	F (MHz)	8	9	A	B	C	D	E	F		F (MHz)	8	9	A	B	C	D	E	F	
483.000	00	03	08	05	02	0C	03	00	00	03	00	04	02	0C	03	00	00	03	00	00
483.025	02	03	08	05	02	0C	03	00	02	03	00	04	02	0C	03	00	00	03	00	00
483.050	04	03	08	05	02	0C	03	00	04	03	00	04	02	0C	03	00	00	03	00	00
483.075	06	03	08	05	02	0C	03	00	06	03	00	04	02	0C	03	00	00	03	00	00
483.100	08	03	08	05	02	0C	03	00	08	03	00	04	02	0C	03	00	00	03	00	00
483.125	0A	03	08	05	02	0C	03	00	0A	03	00	04	02	0C	03	00	00	03	00	00
483.150	0C	03	08	05	02	0C	03	00	0C	03	00	04	02	0C	03	00	00	03	00	00
483.175	0E	03	08	05	02	0C	03	00	0E	03	00	04	02	0C	03	00	00	03	00	00
483.200	00	0C	05	02	0C	03	00	00	00	01	04	02	0C	03	00	00	03	00	00	00
483.225	02	0C	05	02	0C	03	00	02	00	01	04	02	0C	03	00	00	03	00	00	00
483.250	04	0C	05	02	0C	03	00	04	00	01	04	02	0C	03	00	00	03	00	00	00
483.275	06	0C	05	02	0C	03	00	06	00	01	04	02	0C	03	00	00	03	00	00	00
483.300	08	0C	05	02	0C	03	00	08	00	01	04	02	0C	03	00	00	03	00	00	00
483.325	0A	0C	05	02	0C	03	00	0A	00	01	04	02	0C	03	00	00	03	00	00	00
483.350	0C	0C	05	02	0C	03	00	0C	00	01	04	02	0C	03	00	00	03	00	00	00
483.375	0E	0C	05	02	0C	03	00	0E	00	01	04	02	0C	03	00	00	03	00	00	00
483.400	00	01	0C	05	02	0C	03	00	00	01	04	02	0C	03	00	00	03	00	00	00
483.425	02	01	0C	05	02	0C	03	00	02	01	04	02	0C	03	00	00	03	00	00	00
483.450	04	01	0C	05	02	0C	03	00	04	01	04	02	0C	03	00	00	03	00	00	00
483.475	06	01	0C	05	02	0C	03	00	06	01	04	02	0C	03	00	00	03	00	00	00
483.500	08	01	0C	05	02	0C	03	00	08	01	04	02	0C	03	00	00	03	00	00	00
483.525	0A	01	0C	05	02	0C	03	00	0A	01	04	02	0C	03	00	00	03	00	00	00
483.550	0C	01	0C	05	02	0C	03	00	0C	01	04	02	0C	03	00	00	03	00	00	00
483.575	0E	01	0C	05	02	0C	03	00	0E	01	04	02	0C	03	00	00	03	00	00	00
483.600	00	02	0C	05	02	0C	03	00	00	02	01	04	02	0C	03	00	00	03	00	00
483.625	02	0C	05	02	0C	03	00	02	02	01	04	02	0C	03	00	00	03	00	00	00
483.650	04	02	0C	05	02	0C	03	00	04	02	01	04	02	0C	03	00	00	03	00	00
483.675	06	0C	05	02	0C	03	00	06	02	01	04	02	0C	03	00	00	03	00	00	00
483.700	08	0C	05	02	0C	03	00	08	02	01	04	02	0C	03	00	00	03	00	00	00
483.725	0A	0C	05	02	0C	03	00	0A	02	01	04	02	0C	03	00	00	03	00	00	00
483.750	0C	0C	05	02	0C	03	00	0C	02	01	04	02	0C	03	00	00	03	00	00	00
483.775	0E	0C	05	02	0C	03	00	0E	02	01	04	02	0C	03	00	00	03	00	00	00
483.800	00	03	0C	05	02	0C	03	00	00	03	01	04	02	0C	03	00	00	03	00	00
483.825	02	03	0C	05	02	0C	03	00	02	03	01	04	02	0C	03	00	00	03	00	00
483.850	04	0C	05	02	0C	03	00	04	03	01	04	02	0C	03	00	00	03	00	00	00
483.875	06	03	0C	05	02	0C	03	00	06	03	01	04	02	0C	03	00	00	03	00	00
483.900	08	03	0C	05	02	0C	03	00	08	03	01	04	02	0C	03	00	00	03	00	00
483.925	0A	03	0C	05	02	0C	03	00	0A	03	01	04	02	0C	03	00	00	03	00	00
483.950	0C	03	0C	05	02	0C	03	00	0C	03	01	04	02	0C	03	00	00	03	00	00
483.975	0E	03	0C	05	02	0C	03	00	0E	03	01	04	02	0C	03	00	00	03	00	00
484.000	00	00	0B	05	02	0C	03	00	00	00	02	04	02	0C	03	00	00	04	02	0C
484.025	02	00	0B	05	02	0C	03	00	02	00	02	04	02	0C	03	00	00	04	02	0C
484.050	04	00	0B	05	02	0C	03	00	04	00	02	04	02	0C	03	00	00	04	02	0C
484.075	06	00	0B	05	02	0C	03	00	06	00	02	04	02	0C	03	00	00	04	02	0C
484.100	08	00	0B	05	02	0C	03	00	08	00	02	04	02	0C	03	00	00	04	02	0C
484.125	0A	00	0B	05	02	0C	03	00	0A	00	02	04	02	0C	03	00	00	04	02	0C
484.150	0C	00	0B	05	02	0C	03	00	0C	00	02	04	02	0C	03	00	00	04	02	0C
484.175	0E	00	0B	05	02	0C	03	00	0E	00	02	04	02	0C	03	00	00	04	02	0C
484.200	00	01	0B	05	02	0C	03	00	00	01	02	04	02	0C	03	00	00	04	02	0C
484.225	02	01	0B	05	02	0C	03	00	02	01	02	04	02	0C	03	00	00	04	02	0C
484.250	04	01	0B	05	02	0C	03	00	04	01	02	04	02	0C	03	00	00	04	02	0C
484.275	06	01	0B	05	02	0C	03	00	06	01	02	04	02	0C	03	00	00	04	02	0C
484.300	08	01	0B	05	02	0C	03	00	08	01	02	04	02	0C	03	00	00	04	02	0C
484.325	0A	01	0B	05	02	0C	03	00	0A	01	02	04	02	0C	03	00	00	04	02	0C
484.350	0C	01	0B	05	02	0C	03	00	0C	01	02	04	02	0C	03	00	00	04	02	0C
484.375	0E	01	0B	05	02	0C	03	00	0E	01	02	04	02	0C	03	00	00	04	02	0C
484.400	00	02	0B	05	02	0C	03	00	00	02	02	04	02	0C	03	00	00	04	02	0C
484.425	02	02	0B	05	02	0C	03	00	02	02	02	04	02	0C	03	00	00	04	02	0C
484.450	04	02	0B	05	02	0C	03	00	04	02	02	04	02	0C	03	00	00	04	02	0C
484.475	06	02	0B	05	02	0C	03	00	06	02	02	04	02	0C	03	00	00	04	02	0C

***E	UHF TX PROGRAM							UHF RX PROGRAM						
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7						
	F (MHz)	8	9	A	B	C	D E F	F (MHz)	8	9	A	B	C	D E F
486.000	00	02	0F	05	02	0C	03 00	487.500	08	01	01	06	02	0C 03 00
486.025	02	02	0F	05	02	0C	03 00	487.525	0A	01	01	06	02	0C 03 00
486.050	04	02	0F	05	02	0C	03 00	487.550	0C	01	01	06	02	0C 03 00
486.075	06	02	0F	05	02	0C	03 00	487.575	0E	01	01	06	02	0C 03 00
486.100	08	02	0F	05	02	0C	03 00	487.600	00	02	01	06	02	0C 03 00
486.125	0A	02	0F	05	02	0C	03 00	487.625	02	01	06	02	0C 03 00	
486.150	0C	02	0F	05	02	0C	03 00	487.650	04	02	01	06	02	0C 03 00
486.175	0E	02	0F	05	02	0C	03 00	487.675	06	02	01	06	02	0C 03 00
486.200	00	03	0F	05	02	0C	03 00	487.700	08	02	01	06	02	0C 03 00
486.225	02	03	0F	05	02	0C	03 00	487.725	0A	02	01	06	02	0C 03 00
486.250	04	03	0F	05	02	0C	03 00	487.750	0C	02	01	06	02	0C 03 00
486.275	06	03	0F	05	02	0C	03 00	487.775	0E	02	01	06	02	0C 03 00
486.300	08	03	0F	05	02	0C	03 00	487.800	00	03	01	06	02	0C 03 00
486.325	0A	03	0F	05	02	0C	03 00	487.825	02	03	01	06	02	0C 03 00
486.350	0C	03	0F	05	02	0C	03 00	487.850	04	03	01	06	02	0C 03 00
486.375	0E	03	0F	05	02	0C	03 00	487.875	06	03	01	06	02	0C 03 00
486.400	00	00	06	02	0C	03 00	487.900	08	03	01	06	02	0C 03 00	
486.425	02	00	06	02	0C	03 00	487.925	0A	03	01	06	02	0C 03 00	
486.450	04	00	06	02	0C	03 00	487.950	0C	03	01	06	02	0C 03 00	
486.475	06	00	06	02	0C	03 00	487.975	0E	03	01	06	02	0C 03 00	
486.500	08	00	06	02	0C	03 00	488.000	00	02	06	02	0C 03 00		
486.525	0A	00	06	02	0C	03 00	488.025	02	00	02	06	02	0C 03 00	
486.550	0C	00	06	02	0C	03 00	488.050	04	00	02	06	02	0C 03 00	
486.575	0E	00	06	02	0C	03 00	488.075	06	00	02	06	02	0C 03 00	
486.600	01	00	06	02	0C	03 00	488.100	08	00	02	06	02	0C 03 00	
486.625	02	01	06	02	0C	03 00	488.125	0A	00	02	06	02	0C 03 00	
486.650	04	01	06	02	0C	03 00	488.150	0C	00	02	06	02	0C 03 00	
486.675	06	01	06	02	0C	03 00	488.175	0E	00	02	06	02	0C 03 00	
486.700	08	01	06	02	0C	03 00	488.200	00	01	02	06	02	0C 03 00	
486.725	0A	01	06	02	0C	03 00	488.225	02	01	02	06	02	0C 03 00	
486.750	0C	01	06	02	0C	03 00	488.250	04	01	02	06	02	0C 03 00	
486.775	0E	01	06	02	0C	03 00	488.275	06	01	02	06	02	0C 03 00	
486.800	00	02	06	02	0C	03 00	488.300	08	01	02	06	02	0C 03 00	
486.825	02	02	06	02	0C	03 00	488.325	0A	01	02	06	02	0C 03 00	
486.850	04	02	06	02	0C	03 00	488.350	0C	01	02	06	02	0C 03 00	
486.875	06	02	06	02	0C	03 00	488.375	0E	01	02	06	02	0C 03 00	
486.900	08	02	06	02	0C	03 00	488.400	00	02	06	02	0C 03 00		
486.925	0A	02	06	02	0C	03 00	488.425	02	02	06	02	0C 03 00		
486.950	0C	02	06	02	0C	03 00	488.450	04	02	06	02	0C 03 00		
486.975	0E	02	06	02	0C	03 00	488.475	06	02	06	02	0C 03 00		
487.000	00	03	06	02	0C	03 00	488.500	08	02	06	02	0C 03 00		
487.025	02	03	06	02	0C	03 00	488.525	0A	02	06	02	0C 03 00		
487.050	04	03	06	02	0C	03 00	488.550	0C	02	06	02	0C 03 00		
487.075	06	03	06	02	0C	03 00	488.575	0E	02	06	02	0C 03 00		
487.100	08	03	06	02	0C	03 00	488.600	00	03	02	06	02	0C 03 00	
487.125	0A	03	06	02	0C	03 00	488.625	02	03	02	06	02	0C 03 00	
487.150	0C	03	06	02	0C	03 00	488.650	04	03	02	06	02	0C 03 00	
487.175	0E	03	06	02	0C	03 00	488.675	06	03	02	06	02	0C 03 00	
487.200	00	00	06	02	0C	03 00	488.700	08	03	02	06	02	0C 03 00	
487.225	02	00	06	02	0C	03 00	488.725	0A	03	02	06	02	0C 03 00	
487.250	04	00	06	02	0C	03 00	488.750	0C	03	02	06	02	0C 03 00	
487.275	06	00	06	02	0C	03 00	488.775	0E	03	02	06	02	0C 03 00	
487.300	08	00	06	02	0C	03 00	488.800	00	03	02	06	02	0C 03 00	
487.325	0A	00	06	02	0C	03 00	488.825	02	00	03	02	06	02	0C 03 00
487.350	0C	00	06	02	0C	03 00	488.850	04	00	03	02	06	02	0C 03 00
487.375	0E	00	06	02	0C	03 00	488.875	06	00	03	02	06	02	0C 03 00
487.400	00	01	06	02	0C	03 00	488.900	08	00	03	02	06	02	0C 03 00
487.425	02	01	06	02	0C	03 00	488.925	0A	00	03	02	06	02	0C 03 00
487.450	04	01	06	02	0C	03 00	488.950	0C	00	03	02	06	02	0C 03 00
487.475	06	01	06	02	0C	03 00	488.975	0E	00	03	02	06	02	0C 03 00

***E	UHF TX PROGRAM							UHF RX PROGRAM							UHF RX PROGRAM									
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
489.000	00	01	03	06	02	0C	03	00	00	01	08	04	02	0C	03	00	08	00	0A	04	02	0C	03	00
489.025	02	01	03	06	02	0C	03	00	02	01	08	04	02	0C	03	00	0A	00	0A	04	02	0C	03	00
489.050	04	01	03	06	02	0C	03	00	04	01	08	04	02	0C	03	00	0C	00	0A	04	02	0C	03	00
489.075	06	01	03	06	02	0C	03	00	06	01	08	04	02	0C	03	00	0E	00	0A	04	02	0C	03	00
489.100	08	01	03	06	02	0C	03	00	08	01	08	04	02	0C	03	00	00	01	0A	04	02	0C	03	00
489.125	0A	01	03	06	02	0C	03	00	0A	01	08	04	02	0C	03	00	02	01	0A	04	02	0C	03	00
489.150	0C	01	03	06	02	0C	03	00	0C	01	08	04	02	0C	03	00	04	01	0A	04	02	0C	03	00
489.175	0E	01	03	06	02	0C	03	00	0E	01	08	04	02	0C	03	00	06	01	0A	04	02	0C	03	00
489.200	00	02	03	06	02	0C	03	00	00	02	08	04	02	0C	03	00	08	01	0A	04	02	0C	03	00
489.225	02	02	03	06	02	0C	03	00	02	02	08	04	02	0C	03	00	05	01	0A	04	02	0C	03	00
489.250	04	02	03	06	02	0C	03	00	04	02	08	04	02	0C	03	00	0C	01	0A	04	02	0C	03	00
489.275	06	02	03	06	02	0C	03	00	06	02	08	04	02	0C	03	00	0E	01	0A	04	02	0C	03	00
489.300	08	02	03	06	02	0C	03	00	08	02	08	04	02	0C	03	00	00	02	0A	04	02	0C	03	00
489.325	0A	02	03	06	02	0C	03	00	0A	02	08	04	02	0C	03	00	02	02	0A	04	02	0C	03	00
489.350	0C	02	03	06	02	0C	03	00	0C	02	08	04	02	0C	03	00	04	02	0A	04	02	0C	03	00
489.375	0E	02	03	06	02	0C	03	00	0E	02	08	04	02	0C	03	00	06	02	0A	04	02	0C	03	00
489.400	00	03	06	02	0C	03	00	00	00	03	08	04	02	0C	03	00	08	02	0A	04	02	0C	03	00
489.425	02	03	06	02	0C	03	00	02	03	08	04	02	0C	03	00	00	0A	02	0A	04	02	0C	03	00
489.450	04	03	06	02	0C	03	00	04	03	08	04	02	0C	03	00	0C	02	0A	04	02	0C	03	00	
489.475	06	03	06	02	0C	03	00	06	03	08	04	02	0C	03	00	0C	02	0A	04	02	0C	03	00	
489.500	08	03	06	02	0C	03	00	08	03	08	04	02	0C	03	00	0E	02	0A	04	02	0C	03	00	
489.525	0A	03	06	02	0C	03	00	0A	03	08	04	02	0C	03	00	00	03	0A	04	02	0C	03	00	
489.550	0C	03	06	02	0C	03	00	0C	03	08	04	02	0C	03	00	02	03	0A	04	02	0C	03	00	
489.575	0E	03	06	02	0C	03	00	0E	03	08	04	02	0C	03	00	04	03	0A	04	02	0C	03	00	
489.600	00	04	06	02	0C	03	00	00	00	09	04	02	0C	03	00	06	03	0A	04	02	0C	03	00	
489.625	02	04	06	02	0C	03	00	02	00	09	04	02	0C	03	00	08	03	0A	04	02	0C	03	00	
489.650	04	04	06	02	0C	03	00	04	00	09	04	02	0C	03	00	0A	03	0A	04	02	0C	03	00	
489.675	06	04	06	02	0C	03	00	06	00	09	04	02	0C	03	00	0C	03	0A	04	02	0C	03	00	
489.700	08	04	06	02	0C	03	00	08	00	09	04	02	0C	03	00	0E	03	0A	04	02	0C	03	00	
489.725	0A	04	06	02	0C	03	00	0A	00	09	04	02	0C	03	00	02	00	08	04	02	0C	03	00	
489.750	0C	04	06	02	0C	03	00	0C	00	09	04	02	0C	03	00	04	00	08	04	02	0C	03	00	
489.775	0E	04	06	02	0C	03	00	0E	00	09	04	02	0C	03	00	06	00	08	04	02	0C	03	00	
489.800	01	04	06	02	0C	03	00	00	01	09	04	02	0C	03	00	08	00	08	04	02	0C	03	00	
489.825	02	04	06	02	0C	03	00	02	01	09	04	02	0C	03	00	0A	00	08	04	02	0C	03	00	
489.850	04	04	06	02	0C	03	00	04	01	09	04	02	0C	03	00	0C	00	08	04	02	0C	03	00	
489.875	06	04	06	02	0C	03	00	06	01	09	04	02	0C	03	00	0E	00	08	04	02	0C	03	00	
489.900	08	04	06	02	0C	03	00	08	01	09	04	02	0C	03	00	04	00	08	04	02	0C	03	00	
489.925	0A	04	06	02	0C	03	00	0A	01	09	04	02	0C	03	00	02	00	08	04	02	0C	03	00	
489.950	0C	04	06	02	0C	03	00	0C	01	09	04	02	0C	03	00	04	01	08	04	02	0C	03	00	
489.975	0E	04	06	02	0C	03	00	0E	01	09	04	02	0C	03	00	06	01	08	04	02	0C	03	00	
490.000	00	05	06	02	0C	03	00	00	00	09	04	02	0C	03	00	08	01	08	04	02	0C	03	00	
490.025	02	05	06	02	0C	03	00	02	00	09	04	02	0C	03	00	0A	00	08	04	02	0C	03	00	
490.050	04	05	06	02	0C	03	00	04	00	09	04	02	0C	03	00	0C	01	08	04	02	0C	03	00	
490.075	06	05	06	02	0C	03	00	06	00	09	04	02	0C	03	00	0E	01	08	04	02	0C	03	00	
490.100	08	05	06	02	0C	03	00	08	00	09	04	02	0C	03	00	04	02	08	04	02	0C	03	00	
490.125	0A	05	06	02	0C	03	00	0A	00	09	04	02	0C	03	00	02	02	08	04	02	0C	03	00	
490.150	0C	05	06	02	0C	03	00	0C	00	09	04	02	0C	03	00	04	01	08	04	02	0C	03	00	
490.175	0E	05	06	02	0C	03	00	0E	00	09	04	02	0C	03	00	06	02	08	04	02	0C	03	00	
490.200	00	06	06	02	0C	03	00	00	00	09	04	02	0C	03	00	08	02	08	04	02	0C	03	00	
490.225	02	06	06	02	0C	03	00	02	00	09	04	02	0C	03	00	0A	02	08	04	02	0C	03	00	
490.250	04	06	06	02	0C	03	00	04	00	09	04	02	0C	03	00	0C	02	08	04	02	0C	03	00	
490.275	06	06	06	02	0C	03	00	06	00	09	04	02	0C	03	00	0E	02	08	04	02	0C	03	00	
490.300	08	06	06	02	0C	03	00	08	00	09	04	02	0C	03	00	04	02	08	04	02	0C	03	00	
490.325	0A	06	06	02	0C	03	00	0A	00	09	04	02	0C	03	00	02	03	08	04	02	0C	03	00	
490.350	0C	06	06	02	0C	03	00	0C	00	09	04	02	0C	03	00	04	02	08	04	02	0C	03	00	
490.375	0E	06	06	02	0C	03	00	0E	00	09	04	02	0C	03	00	06	03	08	04	02	0C	03	00	
490.400	00	07	06	02	0C	03	00	00	00	0A	04	02	0C	03	00	08	03	08	04	02	0C	03	00	
490.425	02	07	06	02	0C	03	00	02	00	0A	04	02	0C	03	00	0A	03	08	04	02	0C	03	00	
490.450	04	07	06	02	0C	03	00	04	00	0A	04	02	0C	03	00	0C	03	08	04	02	0C	03	00	
490.475	06	07	06	02	0C	03	00	06	00	0A	04	02	0C	03	00	0E	03	08	04	02	0C	03	00	

PAGE 39

***E F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM								
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7								
	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
495.000	00	03	0A	06	02	0C	03	00	00	03	0F	04	02	0C	03	00
495.025	02	03	0A	06	02	0C	03	00	02	03	0F	04	02	0C	03	00
495.050	04	03	0A	06	02	0C	03	00	04	03	0F	04	02	0C	03	00
495.075	06	03	0A	06	02	0C	03	00	06	03	0F	04	02	0C	03	00
495.100	08	03	0A	06	02	0C	03	00	08	03	0F	04	02	0C	03	00
495.125	0A	03	0A	06	02	0C	03	00	0A	03	0F	04	02	0C	03	00
495.150	0C	03	0A	06	02	0C	03	00	0C	03	0F	04	02	0C	03	00
495.175	0E	03	0A	06	02	0C	03	00	0E	03	0F	04	02	0C	03	00
495.200	00	00	0B	06	02	0C	03	00	00	00	00	05	02	0C	03	00
495.225	02	00	0B	06	02	0C	03	00	02	00	00	05	02	0C	03	00
495.250	04	00	0B	06	02	0C	03	00	04	00	00	05	02	0C	03	00
495.275	06	00	0B	06	02	0C	03	00	06	00	00	05	02	0C	03	00
495.300	08	00	0B	06	02	0C	03	00	08	00	00	05	02	0C	03	00
495.325	0A	00	0B	06	02	0C	03	00	0A	00	00	05	02	0C	03	00
495.350	0C	00	0B	06	02	0C	03	00	0C	00	00	05	02	0C	03	00
495.375	0E	00	0B	06	02	0C	03	00	0E	00	00	05	02	0C	03	00
495.400	00	01	0B	06	02	0C	03	00	00	01	00	05	02	0C	03	00
495.425	02	01	0B	06	02	0C	03	00	02	01	00	05	02	0C	03	00
495.450	04	01	0B	06	02	0C	03	00	04	01	00	05	02	0C	03	00
495.475	06	01	0B	06	02	0C	03	00	06	01	00	05	02	0C	03	00
495.500	08	01	0B	06	02	0C	03	00	08	01	00	05	02	0C	03	00
495.525	0A	01	0B	06	02	0C	03	00	0A	01	00	05	02	0C	03	00
495.550	0C	01	0B	06	02	0C	03	00	0C	01	00	05	02	0C	03	00
495.575	0E	01	0B	06	02	0C	03	00	0E	01	00	05	02	0C	03	00
495.600	00	02	0B	06	02	0C	03	00	00	02	00	05	02	0C	03	00
495.625	02	02	0B	06	02	0C	03	00	02	02	00	05	02	0C	03	00
495.650	04	02	0B	06	02	0C	03	00	04	02	00	05	02	0C	03	00
495.675	06	02	0B	06	02	0C	03	00	06	02	00	05	02	0C	03	00
495.700	08	02	0B	06	02	0C	03	00	08	02	00	05	02	0C	03	00
495.725	0A	02	0B	06	02	0C	03	00	0A	02	00	05	02	0C	03	00
495.750	0C	02	0B	06	02	0C	03	00	0C	02	00	05	02	0C	03	00
495.775	0E	02	0B	06	02	0C	03	00	0E	02	00	05	02	0C	03	00
495.800	00	03	0B	06	02	0C	03	00	00	03	00	05	02	0C	03	00
495.825	02	03	0B	06	02	0C	03	00	02	03	00	05	02	0C	03	00
495.850	04	03	0B	06	02	0C	03	00	04	03	00	05	02	0C	03	00
495.875	06	03	0B	06	02	0C	03	00	06	03	00	05	02	0C	03	00
495.900	08	03	0B	06	02	0C	03	00	08	03	00	05	02	0C	03	00
495.925	0A	03	0B	06	02	0C	03	00	0A	03	00	05	02	0C	03	00
495.950	0C	03	0B	06	02	0C	03	00	0C	03	00	05	02	0C	03	00
495.975	0E	03	0B	06	02	0C	03	00	0E	03	00	05	02	0C	03	00
496.000	00	00	0C	06	02	0C	03	00	00	00	01	05	02	0C	03	00
496.025	02	00	0C	06	02	0C	03	00	02	00	01	05	02	0C	03	00
496.050	04	00	0C	06	02	0C	03	00	04	00	01	05	02	0C	03	00
496.075	06	00	0C	06	02	0C	03	00	06	00	01	05	02	0C	03	00
496.100	08	00	0C	06	02	0C	03	00	08	00	01	05	02	0C	03	00
496.125	0A	00	0C	06	02	0C	03	00	0A	00	01	05	02	0C	03	00
496.150	0C	00	0C	06	02	0C	03	00	0C	00	01	05	02	0C	03	00
496.175	0E	00	0C	06	02	0C	03	00	0E	00	01	05	02	0C	03	00
496.200	00	01	0C	06	02	0C	03	00	00	01	01	05	02	0C	03	00
496.225	02	01	0C	06	02	0C	03	00	02	01	01	05	02	0C	03	00
496.250	04	01	0C	06	02	0C	03	00	04	01	01	05	02	0C	03	00
496.275	06	01	0C	06	02	0C	03	00	06	01	01	05	02	0C	03	00
496.300	08	01	0C	06	02	0C	03	00	08	01	01	05	02	0C	03	00
496.325	0A	01	0C	06	02	0C	03	00	0A	01	01	05	02	0C	03	00
496.350	0C	01	0C	06	02	0C	03	00	0C	01	01	05	02	0C	03	00
496.375	0E	01	0C	06	02	0C	03	00	0E	01	01	05	02	0C	03	00
496.400	00	02	0C	06	02	0C	03	00	00	02	01	05	02	0C	03	00
496.425	02	02	0C	06	02	0C	03	00	02	02	01	05	02	0C	03	00
496.450	04	02	0C	06	02	0C	03	00	04	02	01	05	02	0C	03	00
496.475	06	02	0C	06	02	0C	03	00	06	02	01	05	02	0C	03	00

UHF TX PROGRAM								UHF RX PROGRAM								
0 1 2 3 4 5 6 7								0 1 2 3 4 5 6 7								
F (MHz)	8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7
498.000	00	02	0E	06	02	0C	03	00	00	02	03	05	02	0C	03	00
498.025	02	02	0E	06	02	0C	03	00	02	02	03	05	02	0C	03	00
498.050	04	02	0E	06	02	0C	03	00	04	02	03	05	02	0C	03	00
498.075	06	02	0E	06	02	0C	03	00	06	02	03	05	02	0C	03	00
498.100	08	02	0E	06	02	0C	03	00	08	02	03	05	02	0C	03	00
498.125	0A	02	0E	06	02	0C	03	00	0A	02	03	05	02	0C	03	00
498.150	0C	02	0E	06	02	0C	03	00	0C	02	03	05	02	0C	03	00
498.175	0E	02	0E	06	02	0C	03	00	0E	02	03	05	02	0C	03	00
498.200	00	03	0E	06	02	0C	03	00	00	03	03	05	02	0C	03	00
498.225	02	03	0E	06	02	0C	03	00	02	03	03	05	02	0C	03	00
498.250	04	03	0E	06	02	0C	03	00	04	03	03	05	02	0C	03	00
498.275	06	03	0E	06	02	0C	03	00	06	03	03	05	02	0C	03	00
498.300	08	03	0E	06	02	0C	03	00	08	03	03	05	02	0C	03	00
498.325	0A	03	0E	06	02	0C	03	00	0A	03	03	05	02	0C	03	00
498.350	0C	03	0E	06	02	0C	03	00	0C	03	03	05	02	0C	03	00
498.375	0E	03	0E	06	02	0C	03	00	0E	03	03	05	02	0C	03	00
498.400	00	00	0F	06	02	0C	03	00	00	00	04	05	02	0C	03	00
498.425	02	00	0F	06	02	0C	03	00	02	00	04	05	02	0C	03	00
498.450	04	00	0F	06	02	0C	03	00	04	00	04	05	02	0C	03	00
498.475	06	00	0F	06	02	0C	03	00	06	00	04	05	02	0C	03	00
498.500	08	00	0F	06	02	0C	03	00	08	00	04	05	02	0C	03	00
498.525	0A	00	0F	06	02	0C	03	00	0A	00	04	05	02	0C	03	00
498.550	0C	00	0F	06	02	0C	03	00	0C	00	04	05	02	0C	03	00
498.575	0E	00	0F	06	02	0C	03	00	0E	00	04	05	02	0C	03	00
498.600	00	01	0F	06	02	0C	03	00	00	01	04	05	02	0C	03	00
498.625	02	01	0F	06	02	0C	03	00	02	01	04	05	02	0C	03	00
498.650	04	01	0F	06	02	0C	03	00	04	01	04	05	02	0C	03	00
498.675	06	01	0F	06	02	0C	03	00	06	01	04	05	02	0C	03	00
498.700	08	01	0F	06	02	0C	03	00	08	01	04	05	02	0C	03	00
498.725	0A	01	0F	06	02	0C	03	00	0A	01	04	05	02	0C	03	00
498.750	0C	01	0F	06	02	0C	03	00	0C	01	04	05	02	0C	03	00
498.775	0E	01	0F	06	02	0C	03	00	0E	01	04	05	02	0C	03	00
498.800	00	02	0F	06	02	0C	03	00	00	02	04	05	02	0C	03	00
498.825	02	0F	06	02	0C	03	00	02	02	04	05	02	0C	03	00	00
498.850	04	02	0F	06	02	0C	03	00	04	02	04	05	02	0C	03	00
498.875	06	02	0F	06	02	0C	03	00	06	02	04	05	02	0C	03	00
498.900	08	02	0F	06	02	0C	03	00	08	02	04	05	02	0C	03	00
498.925	0A	02	0F	06	02	0C	03	00	0A	02	04	05	02	0C	03	00
498.950	0C	02	0F	06	02	0C	03	00	0C	02	04	05	02	0C	03	00
498.975	0E	02	0F	06	02	0C	03	00	0E	02	04	05	02	0C	03	00
499.000	00	03	0F	06	02	0C	03	00	00	03	04	05	02	0C	03	00
499.025	02	03	0F	06	02	0C	03	00	02	03	04	05	02	0C	03	00
499.050	04	03	0F	06	02	0C	03	00	04	03	04	05	02	0C	03	00
499.075	06	03	0F	06	02	0C	03	00	06	03	04	05	02	0C	03	00
499.100	08	03	0F	06	02	0C	03	00	08	03	04	05	02	0C	03	00
499.125	0A	03	0F	06	02	0C	03	00	0A	03	04	05	02	0C	03	00
499.150	0C	03	0F	06	02	0C	03	00	0C	03	04	05	02	0C	03	00
499.175	0E	03	0F	06	02	0C	03	00	0E	03	04	05	02	0C	03	00
499.200	00	00	07	02	0C	03	00	00	00	05	05	02	0C	03	00	00
499.225	02	00	07	02	0C	03	00	02	02	05	05	02	0C	03	00	00
499.250	04	00	07	02	0C	03	00	04	00	05	05	02	0C	03	00	00
499.275	06	00	07	02	0C	03	00	06	00	05	05	02	0C	03	00	00
499.300	08	00	07	02	0C	03	00	08	00	05	05	02	0C	03	00	00
499.325	0A	00	07	02	0C	03	00	0A	00	05	05	02	0C	03	00	00
499.350	0C	00	07	02	0C	03	00	0C	00	05	05	02	0C	03	00	00
499.375	0E	00	07	02	0C	03	00	0E	00	05	05	02	0C	03	00	00
499.400	00	01	07	02	0C	03	00	00	01	05	05	02	0C	03	00	00
499.425	02	01	07	02	0C	03	00	02	01	05	05	02	0C	03	00	00
499.450	04	01	07	02	0C	03	00	04	01	05	05	02	0C	03	00	00
499.475	06	01	07	02	0C	03	00	06	01	05	05	02	0C	03	00	00
499.500	08	01	07	02	0C	03	00	08	01	05	05	02	0C	03	00	00
499.525	0A	01	07	02	0C	03	00	0A	01	05	05	02	0C	03	00	00
499.550	0C	01	07	02	0C	03	00	0C	01	05	05	02	0C	03	00	00
499.575	0E	01	07	02	0C	03	00	0E	01	05	05	02	0C	03	00	00
499.600	00	02	07	02	0C	03	00	00	02	05	05	02	0C	03	00	00
499.625	02	00	07	02	0C	03	00	02	00	05	05	02	0C	03	00	00
499.650	04	02	07	02	0C	03	00	04	02	05	05	02	0C	03	00	00
499.675	06	02	07	02	0C	03	00	06	02	05	05	02	0C	03	00	00
499.700	08	02	07	02	0C	03	00	08	02	05	05	02	0C	03	00	00
499.725	0A	02	07	02	0C	03	00	0A	02	05	05	02	0C	03	00	00
499.750	0C	02	07	02	0C	03	00	0C	02	05	05	02	0C	03	00	00
499.775	0E	02	07	02	0C	03	00	0E	02	05	05	02	0C	03	00	00
499.800	00	03	07	02	0C	03	00	00	03	05	05	02	0C	03	00	00
499.825	02	03	07	02	0C	03	00	02	03	05	05	02	0C	03	00	00
499.850	04	03	07	02	0C	03	00	04	03	05	05	02	0C	03	00	00
499.875	06	03	07	02	0C	03	00	06	03	05	05	02	0C	03	00	00
499.900	08	03	07	02	0C	03	00	08	03	05	05	02	0C	03	00	00
499.925	0A	03	07	02	0C	03	00	0A	03	05	05	02	0C	03	00	00
499.950	0C	03	07	02	0C	03	00	0C	03	05	05	02	0C	03	00	00
499.975	0E	03	07	02	0C	03	00	0E	03	05	05	02	0C	03	00	00
500.000	00	00	01	07	02	0C	03	00	00	00	06	05	02	0C	03	00
500.025	02	00	01	07	02	0C	03	00	02	00	06	05	02	0C	03	00
500.050	04	00	01	07	02	0C	03	00	04	00	06	05	02	0C	03	00
500.075	06	00	01	07	02	0C	03	00	06	00	06	05	02	0C	03	00
500.100	08	00	01	07	02	0C	03	00	08	00	06	05	02	0C	03	00
500.125	0A	00	01	07	02	0C	03	00	0A	00	06	05	02	0C	03	00
500.150	0C	00	01	07	02	0C	03	00	0C	00	06	05	02	0C	03	00
500.175	0E	00	01	07	02	0C	03	00	0E	00	06	05	02	0C	03	00
500.200	00	01	07	02	0C	03	00	00	01	06	05	02	0C	03	00	00
500.225	02	01	07	02	0C	03	00	02	01	06	05	02	0C	03	00	00
500.250	04	01	07	02	0C	03	00	04	01	06	05	02	0C	03	00	00
500.275	06	01	07	02	0C	03	00	06	01	06	05	02	0C	03	00	00
500.300	08	01	07	02	0C	03	00	08	01	06	05	02	0C	03	00	00
500.325	0A	01	07	02	0C	03	00	0A	01	06	05	02	0C	03	00	00
500.350	0C	01	07	02	0C	03	00	0C	01	06	05	02	0C	03	00	00
500.375	0E	01														

***E																	UHF TX PROGRAM							UHF RX PROGRAM								
F (MHz)																	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7									
501.000	00	01	02	07	02	0C	03	00	00	01	07	05	02	0C	03	00	08	00	09	05	02	0C	03	00								
501.025	02	01	02	07	02	0C	03	00	02	01	07	05	02	0C	03	00	0A	00	09	05	02	0C	03	00								
501.050	04	01	02	07	02	0C	03	00	04	01	07	05	02	0C	03	00	0C	00	09	05	02	0C	03	00								
501.075	06	01	02	07	02	0C	03	00	06	01	07	05	02	0C	03	00	0E	00	09	05	02	0C	03	00								
501.100	08	01	02	07	02	0C	03	00	08	01	07	05	02	0C	03	00	00	01	09	05	02	0C	03	00								
501.125	0A	01	02	07	02	0C	03	00	0A	01	07	05	02	0C	03	00	02	01	09	05	02	0C	03	00								
501.150	0C	01	02	07	02	0C	03	00	0C	01	07	05	02	0C	03	00	04	01	09	05	02	0C	03	00								
501.175	0E	01	02	07	02	0C	03	00	0E	01	07	05	02	0C	03	00	06	01	09	05	02	0C	03	00								
501.200	00	02	07	02	0C	03	00	00	02	07	05	02	0C	03	00	08	01	09	05	02	0C	03	00	00								
501.225	02	02	07	02	0C	03	00	02	02	07	05	02	0C	03	00	0A	01	09	05	02	0C	03	00	00								
501.250	04	02	07	02	0C	03	00	04	02	07	05	02	0C	03	00	0C	01	09	05	02	0C	03	00	00								
501.275	06	02	07	02	0C	03	00	06	02	07	05	02	0C	03	00	0E	01	09	05	02	0C	03	00	00								
501.300	08	02	07	02	0C	03	00	08	02	07	05	02	0C	03	00	00	02	09	05	02	0C	03	00	00								
501.325	0A	02	07	02	0C	03	00	0A	02	07	05	02	0C	03	00	00	02	09	05	02	0C	03	00	00								
501.350	0C	02	07	02	0C	03	00	0C	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00	00								
501.375	0E	02	07	02	0C	03	00	0E	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00	00								
501.400	00	03	02	07	02	0C	03	00	00	03	02	07	05	02	0C	03	00	06	02	09	05	02	0C	03	00							
501.425	02	03	02	07	02	0C	03	00	02	03	02	07	05	02	0C	03	00	08	02	09	05	02	0C	03	00							
501.450	04	03	02	07	02	0C	03	00	04	03	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00							
501.475	06	03	02	07	02	0C	03	00	06	03	02	07	05	02	0C	03	00	0C	02	09	05	02	0C	03	00							
501.500	08	03	02	07	02	0C	03	00	08	03	02	07	05	02	0C	03	00	0E	02	09	05	02	0C	03	00							
501.525	0A	03	02	07	02	0C	03	00	0A	03	02	07	05	02	0C	03	00	00	02	09	05	02	0C	03	00							
501.550	0C	03	02	07	02	0C	03	00	0C	03	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00							
501.575	0E	03	02	07	02	0C	03	00	0E	03	02	07	05	02	0C	03	00	0C	02	09	05	02	0C	03	00							
501.600	00	03	02	07	02	0C	03	00	00	03	02	07	05	02	0C	03	00	0E	02	09	05	02	0C	03	00							
501.625	02	00	03	02	07	02	0C	03	02	00	03	02	07	05	02	0C	03	00	00	02	09	05	02	0C	03	00						
501.650	04	00	03	02	07	02	0C	03	04	00	03	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00						
501.675	06	00	03	02	07	02	0C	03	06	00	03	02	07	05	02	0C	03	00	0C	02	09	05	02	0C	03	00						
501.700	08	00	03	02	07	02	0C	03	08	00	03	02	07	05	02	0C	03	00	0E	02	09	05	02	0C	03	00						
501.725	0A	00	03	02	07	02	0C	03	0A	00	03	02	07	05	02	0C	03	00	00	02	09	05	02	0C	03	00						
501.750	0C	00	03	02	07	02	0C	03	0C	00	03	02	07	05	02	0C	03	00	0A	02	09	05	02	0C	03	00						
501.775	0E	00	03	02	07	02	0C	03	0E	00	03	02	07	05	02	0C	03	00	0C	02	09	05	02	0C	03	00						
501.800	00	01	03	02	07	02	0C	03	00	0E	01	08	05	02	0C	03	00	06	00	0A	05	02	0C	03	00	00						
501.825	02	01	03	02	07	02	0C	03	00	02	01	08	05	02	0C	03	00	0A	00	0A	05	02	0C	03	00	00						
501.850	04	01	03	02	07	02	0C	03	00	04	01	08	05	02	0C	03	00	0C	00	0A	05	02	0C	03	00	00						
501.875	06	01	03	02	07	02	0C	03	00	06	01	08	05	02	0C	03	00	0E	00	0A	05	02	0C	03	00	00						
501.900	08	01	03	02	07	02	0C	03	00	08	01	08	05	02	0C	03	00	00	01	0A	05	02	0C	03	00	00						
501.925	0A	01	03	02	07	02	0C	03	00	0A	01	08	05	02	0C	03	00	02	01	0A	05	02	0C	03	00	00						
501.950	0C	01	03	02	07	02	0C	03	00	0C	01	08	05	02	0C	03	00	04	01	0A	05	02	0C	03	00	00						
501.975	0E	01	03	02	07	02	0C	03	00	0E	01	08	05	02	0C	03	00	06	01	0A	05	02	0C	03	00	00						
502.000	00	02	03	07	02	0C	03	00	00	02	08	05	02	0C	03	00	08	01	0A	05	02	0C	03	00	00	00						
502.025	02	02	03	07	02	0C	03	00	02	02	08	05	02	0C	03	00	0A	01	0A	05	02	0C	03	00	00	00						
502.050	04	02	03	07	02	0C	03	00	04	02	08	05	02	0C	03	00	0C	01	0A	05	02	0C	03	00	00	00						
502.075	06	02	03	07	02	0C	03	00	06	02	08	05	02	0C	03	00	0E	01	0A	05	02	0C	03	00	00	00						
502.100	08	02	03	07	02	0C	03	00	08	02	08	05	02	0C	03	00	00	02	0A	05	02	0C	03	00	00	00						
502.125	0A	02	03	07	02	0C	03	00	0A	02	08	05	02	0C	03	00	02	0A	05	02	0C	03	00	00	00	00						
502.150	0C	02	03	07	02	0C	03	00	0C	02	08	05	02	0C	03	00	04	02	0A	05	02	0C	03	00	00	00						
502.175	0E	02	03	07	02	0C	03	00	0E	02	08	05	02	0C	03	00	06	02	0A	05	02	0C	03	00	00	00						
502.200	00	03	07	02	0C	03	00	00	00	03	08	05	02	0C	03	00	08	02	0A	05	02	0C	03	00	00	00						
502.225	02	03	07	02	0C	03	00	02	03	08	05	02	0C	03	00	00	0A	02	0A	05	02	0C	03	00	00	00						
502.250	04	03	07	02	0C	03	00	04	03	08	05	02	0C	03	00	02	0C	0A	05	02	0C	03	00	00	00							
502.275	06	03	07	02	0C	03	00	06	03	08	05	02	0C	03	00	04	03	0A	05	02	0C	03	00	00	00							
502.300	08	03	07	02	0C	03	00	08	03	08	05	02	0C	03	00	06	04	0A	05	02	0C	03	00	00	00							
502.325	0A	03	07	02	0C	03	00	0A	03	08	05	02	0C	03	00	08	06	0A	05	02	0C	03	00	00	00							
502.350	0C	03	07	02	0C	03	00	0C	03	08	05	02	0C	03	00	0A	08	0A	05	02	0C	03	00	00	00							
502.375	0E	03	07	02	0C	03	00	0E	03	08	05	02	0C	03	00	0C	0A	05	02	0C	03	00	00	00	00							
502.400	00	00	04	07	02	0C	03	00	00	00	09	05	02	0C	03	00	0E	03	0A	05	02	0C	03	00	00	00						
502.425	02	00	04	07	02	0C	03	00	02	00	09	05	02	0C	03	00	00	03	0A	05	02	0C	03	00	00	00						
502.450	04	00	04	07	02	0C	03	00	04	00	09	05	02	0C	03	00	0A	03	0A	05	02	0C	03	00	00	00						
502.475	06	00	04	07	02	0C	03	00	06	00	09	05	02	0C	03	00	0E	03	0A	05	02	0C	03	00	00	00						

***E	UHF TX PROGRAM							UHF RX PROGRAM								
	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
F (MHz)	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
504.000	00	00	06	07	02	0C	03	00	00	00	0B	05	02	0C	03	00
504.025	02	00	06	07	02	0C	03	00	02	00	08	05	02	0C	03	00
504.050	04	00	06	07	02	0C	03	00	04	00	0B	05	02	0C	03	00
504.075	06	00	06	07	02	0C	03	00	06	00	0B	05	02	0C	03	00
504.100	08	00	06	07	02	0C	03	00	08	00	0B	05	02	0C	03	00
504.125	0A	00	06	07	02	0C	03	00	0A	00	0B	05	02	0C	03	00
504.150	0C	00	06	07	02	0C	03	00	0C	00	0B	05	02	0C	03	00
504.175	0E	00	06	07	02	0C	03	00	0E	00	0B	05	02	0C	03	00
504.200	00	01	06	07	02	0C	03	00	00	01	0B	05	02	0C	03	00
504.225	02	01	06	07	02	0C	03	00	02	01	0B	05	02	0C	03	00
504.250	04	01	06	07	02	0C	03	00	04	01	0B	05	02	0C	03	00
504.275	06	01	06	07	02	0C	03	00	06	01	0B	05	02	0C	03	00
504.300	08	01	06	07	02	0C	03	00	08	01	0B	05	02	0C	03	00
504.325	0A	01	06	07	02	0C	03	00	0A	01	0B	05	02	0C	03	00
504.350	0C	01	06	07	02	0C	03	00	0C	01	0B	05	02	0C	03	00
504.375	0E	01	06	07	02	0C	03	00	0E	01	0B	05	02	0C	03	00
504.400	00	02	06	07	02	0C	03	00	00	02	0B	05	02	0C	03	00
504.425	02	02	06	07	02	0C	03	00	02	02	0B	05	02	0C	03	00
504.450	04	02	06	07	02	0C	03	00	04	02	0B	05	02	0C	03	00
504.475	06	02	06	07	02	0C	03	00	06	02	0B	05	02	0C	03	00
504.500	08	02	06	07	02	0C	03	00	08	02	0B	05	02	0C	03	00
504.525	0A	02	06	07	02	0C	03	00	0A	02	0B	05	02	0C	03	00
504.550	0C	02	06	07	02	0C	03	00	0C	02	0B	05	02	0C	03	00
504.575	0E	02	06	07	02	0C	03	00	0E	02	0B	05	02	0C	03	00
504.600	00	03	06	07	02	0C	03	00	00	03	0B	05	02	0C	03	00
504.625	02	03	06	07	02	0C	03	00	02	03	0B	05	02	0C	03	00
504.650	04	03	06	07	02	0C	03	00	04	03	0B	05	02	0C	03	00
504.675	06	03	06	07	02	0C	03	00	06	03	0B	05	02	0C	03	00
504.700	08	03	06	07	02	0C	03	00	08	03	0B	05	02	0C	03	00
504.725	0A	03	06	07	02	0C	03	00	0A	03	0B	05	02	0C	03	00
504.750	0C	03	06	07	02	0C	03	00	0C	03	0B	05	02	0C	03	00
504.775	0E	03	06	07	02	0C	03	00	0E	03	0B	05	02	0C	03	00
504.800	00	04	07	02	0C	03	00	00	00	04	07	02	0C	03	00	00
504.825	02	00	07	02	0C	03	00	02	00	04	07	02	0C	03	00	00
504.850	04	00	07	02	0C	03	00	04	00	04	07	02	0C	03	00	00
504.875	06	00	07	02	0C	03	00	06	00	04	07	02	0C	03	00	00
504.900	08	00	07	02	0C	03	00	08	00	04	07	02	0C	03	00	00
504.925	0A	00	07	02	0C	03	00	0A	00	04	07	02	0C	03	00	00
504.950	0C	00	07	02	0C	03	00	0C	00	04	07	02	0C	03	00	00
504.975	0E	00	07	02	0C	03	00	0E	00	04	07	02	0C	03	00	00
505.000	00	01	07	02	0C	03	00	00	01	04	07	02	0C	03	00	00
505.025	02	01	07	02	0C	03	00	02	01	04	07	02	0C	03	00	00
505.050	04	01	07	02	0C	03	00	04	01	04	07	02	0C	03	00	00
505.075	06	01	07	02	0C	03	00	06	01	04	07	02	0C	03	00	00
505.100	08	01	07	02	0C	03	00	08	01	04	07	02	0C	03	00	00
505.125	0A	01	07	02	0C	03	00	0A	01	04	07	02	0C	03	00	00
505.150	0C	01	07	02	0C	03	00	0C	01	04	07	02	0C	03	00	00
505.175	0E	01	07	02	0C	03	00	0E	01	04	07	02	0C	03	00	00
505.200	00	02	07	02	0C	03	00	00	02	04	07	02	0C	03	00	00
505.225	02	02	07	02	0C	03	00	02	02	04	07	02	0C	03	00	00
505.250	04	02	07	02	0C	03	00	04	02	04	07	02	0C	03	00	00
505.275	06	02	07	02	0C	03	00	06	02	04	07	02	0C	03	00	00
505.300	08	02	07	02	0C	03	00	08	02	04	07	02	0C	03	00	00
505.325	0A	02	07	02	0C	03	00	0A	02	04	07	02	0C	03	00	00
505.350	0C	02	07	02	0C	03	00	0C	02	04	07	02	0C	03	00	00
505.375	0E	02	07	02	0C	03	00	0E	02	04	07	02	0C	03	00	00
505.400	00	03	07	02	0C	03	00	00	03	04	07	02	0C	03	00	00
505.425	02	03	07	02	0C	03	00	02	03	04	07	02	0C	03	00	00
505.450	04	03	07	02	0C	03	00	04	03	04	07	02	0C	03	00	00
505.475	06	03	07	02	0C	03	00	06	03	04	07	02	0C	03	00	00
505.500	08	03	07	02	0C	03	00	08	03	04	07	02	0C	03	00	00
505.525	0A	03	07	02	0C	03	00	0A	03	04	07	02	0C	03	00	00
505.550	0C	03	07	02	0C	03	00	0C	03	04	07	02	0C	03	00	00
505.575	0E	03	07	02	0C	03	00	0E	03	04	07	02	0C	03	00	00
505.600	00	04	07	02	0C	03	00	00	04	04	07	02	0C	03	00	00
505.625	02	04	07	02	0C	03	00	02	04	04	07	02	0C	03	00	00
505.650	04	04	07	02	0C	03	00	04	04	04	07	02	0C	03	00	00
505.675	06	04	07	02	0C	03	00	06	04	04	07	02	0C	03	00	00
505.700	08	04	07	02	0C	03	00	08	04	04	07	02	0C	03	00	00
505.725	0A	04	07	02	0C	03	00	0A	04	04	07	02	0C	03	00	00
505.750	0C	04	07	02	0C	03	00	0C	04	04	07	02	0C	03	00	00
505.775	0E	04	07	02	0C	03	00	0E	04	04	07	02	0C	03	00	00
505.800	00	05	07	02	0C	03	00	00	05	04	07	02	0C	03	00	00
505.825	02	05	07	02	0C	03	00	02	05	04	07	02	0C	03	00	00
505.850	04	05	07	02	0C	03	00	04	05	04	07	02	0C	03	00	00
505.875	06	05	07	02	0C	03	00	06	05	04	07	02	0C	03	00	00
505.900	08	05	07	02	0C	03	00	08	05	04	07	02	0C	03	00	00
505.925	0A	05	07	02	0C	03	00	0A	05	04	07	02	0C	03	00	00
505.950	0C	05	07	02	0C	03	00	0C	05	04	07	02	0C	03	00	00
505.975	0E	05	07	02	0C	03	00	0E	05	04	07	02	0C	03	00	00

***E	UHF TX PROGRAM										UHF RX PROGRAM									
	0 1 2 3 4 5 6 7										0 1 2 3 4 5 6 7									
	F (MHz)	8	9	A	B	C	D	E	F		F (MHz)	8	9	A	B	C	D	E	F	
507.000	00 03 09 07 02 0C 03 00	00	03	0E	05	02	0C	03	00		08	02	00	06	02	0C	03	00		
507.025	02 03 09 07 02 0C 03 00	02	03	0E	05	02	0C	03	00		0A	02	00	06	02	0C	03	00		
507.050	04 03 09 07 02 0C 03 00	04	03	0E	05	02	0C	03	00		0C	02	00	06	02	0C	03	00		
507.075	06 03 09 07 02 0C 03 00	06	03	0E	05	02	0C	03	00		0E	02	00	06	02	0C	03	00		
507.100	08 03 09 07 02 0C 03 00	08	03	0E	05	02	0C	03	00		00	03	00	06	02	0C	03	00		
507.125	0A 03 09 07 02 0C 03 00	0A	03	0E	05	02	0C	03	00		02	03	00	06	02	0C	03	00		
507.150	0C 03 09 07 02 0C 03 00	0C	03	0E	05	02	0C	03	00		04	03	00	06	02	0C	03	00		
507.175	0E 03 09 07 02 0C 03 00	0E	03	0E	05	02	0C	03	00		06	03	00	06	02	0C	03	00		
507.200	00 0A 07 02 0C 03 00	00	00	0F	05	02	0C	03	00		08	03	00	06	02	0C	03	00		
507.225	02 0A 07 02 0C 03 00	02	00	0F	05	02	0C	03	00		0A	03	00	06	02	0C	03	00		
507.250	04 0A 07 02 0C 03 00	04	00	0F	05	02	0C	03	00		0C	03	00	06	02	0C	03	00		
507.275	06 0A 07 02 0C 03 00	06	00	0F	05	02	0C	03	00		0E	03	00	06	02	0C	03	00		
507.300	08 0A 07 02 0C 03 00	08	00	0F	05	02	0C	03	00		00	00	01	06	02	0C	03	00		
507.325	0A 0A 07 02 0C 03 00	0A	00	0F	05	02	0C	03	00		02	00	01	06	02	0C	03	00		
507.350	0C 0A 07 02 0C 03 00	0C	00	0F	05	02	0C	03	00		04	00	01	06	02	0C	03	00		
507.375	0E 0A 07 02 0C 03 00	0E	00	0F	05	02	0C	03	00		06	00	01	06	02	0C	03	00		
507.400	00 0A 07 02 0C 03 00	00	01	0F	05	02	0C	03	00		08	00	01	06	02	0C	03	00		
507.425	02 0A 07 02 0C 03 00	02	01	0F	05	02	0C	03	00		0A	00	01	06	02	0C	03	00		
507.450	04 0A 07 02 0C 03 00	04	01	0F	05	02	0C	03	00		0C	00	01	06	02	0C	03	00		
507.475	06 0A 07 02 0C 03 00	06	01	0F	05	02	0C	03	00		0E	00	01	06	02	0C	03	00		
507.500	08 0A 07 02 0C 03 00	08	01	0F	05	02	0C	03	00		00	01	01	06	02	0C	03	00		
507.525	0A 0A 07 02 0C 03 00	0A	01	0F	05	02	0C	03	00		02	01	01	06	02	0C	03	00		
507.550	0C 0A 07 02 0C 03 00	0C	01	0F	05	02	0C	03	00		04	02	01	06	02	0C	03	00		
507.575	0E 0A 07 02 0C 03 00	0E	01	0F	05	02	0C	03	00		06	02	01	06	02	0C	03	00		
507.600	00 0A 07 02 0C 03 00	00	02	0F	05	02	0C	03	00		08	01	01	06	02	0C	03	00		
507.625	02 0A 07 02 0C 03 00	02	02	0F	05	02	0C	03	00		0A	01	01	06	02	0C	03	00		
507.650	04 0A 07 02 0C 03 00	04	02	0F	05	02	0C	03	00		0C	01	01	06	02	0C	03	00		
507.675	06 0A 07 02 0C 03 00	06	02	0F	05	02	0C	03	00		0E	01	01	06	02	0C	03	00		
507.700	08 0A 07 02 0C 03 00	08	02	0F	05	02	0C	03	00		00	02	01	06	02	0C	03	00		
507.725	0A 0A 07 02 0C 03 00	0A	02	0F	05	02	0C	03	00		02	02	01	06	02	0C	03	00		
507.750	0C 0A 07 02 0C 03 00	0C	02	0F	05	02	0C	03	00		04	02	01	06	02	0C	03	00		
507.775	0E 0A 07 02 0C 03 00	0E	02	0F	05	02	0C	03	00		06	02	01	06	02	0C	03	00		
507.800	00 0A 07 02 0C 03 00	00	03	0F	05	02	0C	03	00		08	02	01	06	02	0C	03	00		
507.825	02 0A 07 02 0C 03 00	02	03	0F	05	02	0C	03	00		0A	02	01	06	02	0C	03	00		
507.850	04 0A 07 02 0C 03 00	04	03	0F	05	02	0C	03	00		0C	02	01	06	02	0C	03	00		
507.875	06 0A 07 02 0C 03 00	06	03	0F	05	02	0C	03	00		0E	02	01	06	02	0C	03	00		
507.900	08 0A 07 02 0C 03 00	08	03	0F	05	02	0C	03	00		00	03	01	06	02	0C	03	00		
507.925	0A 0A 07 02 0C 03 00	0A	03	0F	05	02	0C	03	00		02	03	01	06	02	0C	03	00		
507.950	0C 0A 07 02 0C 03 00	0C	03	0F	05	02	0C	03	00		04	03	01	06	02	0C	03	00		
507.975	0E 0A 07 02 0C 03 00	0E	03	0F	05	02	0C	03	00		06	03	01	06	02	0C	03	00		
508.000	00 0B 07 02 0C 03 00	00	00	00	06	02	0C	03	00		08	03	01	06	02	0C	03	00		
508.025	02 0B 07 02 0C 03 00	02	00	00	06	02	0C	03	00		0A	03	01	06	02	0C	03	00		
508.050	04 0B 07 02 0C 03 00	04	00	00	06	02	0C	03	00		0C	03	01	06	02	0C	03	00		
508.075	06 0B 07 02 0C 03 00	06	00	00	06	02	0C	03	00		0E	03	01	06	02	0C	03	00		
508.100	08 0B 07 02 0C 03 00	08	00	00	06	02	0C	03	00		00	00	02	06	02	0C	03	00		
508.125	0A 0B 07 02 0C 03 00	0A	00	00	06	02	0C	03	00		02	00	02	06	02	0C	03	00		
508.150	0C 0B 07 02 0C 03 00	0C	00	00	06	02	0C	03	00		04	00	02	06	02	0C	03	00		
508.175	0E 0B 07 02 0C 03 00	0E	00	00	06	02	0C	03	00		06	00	02	06	02	0C	03	00		
508.200	00 0B 07 02 0C 03 00	00	01	00	06	02	0C	03	00		08	00	02	06	02	0C	03	00		
508.225	02 0B 07 02 0C 03 00	02	01	00	06	02	0C	03	00		0A	00	02	06	02	0C	03	00		
508.250	04 0B 07 02 0C 03 00	04	01	00	06	02	0C	03	00		0C	00	02	06	02	0C	03	00		
508.275	06 0B 07 02 0C 03 00	06	01	00	06	02	0C	03	00		0E	00	02	06	02	0C	03	00		
508.300	08 0B 07 02 0C 03 00	08	01	00	06	02	0C	03	00		00	01	02	06	02	0C	03	00		
508.325	0A 0B 07 02 0C 03 00	0A	01	00	06	02	0C	03	00		02	01	02	06	02	0C	03	00		
508.350	0C 0B 07 02 0C 03 00	0C	01	00	06	02	0C	03	00		04	01	02	06	02	0C	03	00		
508.375	0E 0B 07 02 0C 03 00	0E	01	00	06	02	0C	03	00		06	01	02	06	02	0C	03	00		
508.400	00 0B 07 02 0C 03 00	00	02	00	06	02	0C	03	00		08	01	02	06	02	0C	03	00		
508.425	02 0B 07 02 0C 03 00	02	02	00	06	02	0C	03	00		0A	01	02	06	02	0C	03	00		
508.450	04 0B 07 02 0C 03 00	04	02	00	06	02	0C	03	00		0C	01	02	06	02	0C	03	00		
508.475	06 0B 07 02 0C 03 00	06	02	00	06	02	0C	03	00		0E	01	02	06	02	0C	03	00		

***E F (MHz)	UHF TX PROGRAM							UHF RX PROGRAM								
	0 1 2 3 4 5 6 7							0 1 2 3 4 5 6 7								
	8	9	A	B	C	D	E	F	8	9	A	B	C	D	E	F
510.000	00	02	00	07	02	0C	03	00	00	02	06	02	0C	03	00	00
510.025	02	02	00	07	02	0C	03	00	02	02	06	02	0C	03	00	00
510.050	04	02	00	07	02	0C	03	00	04	02	06	02	0C	03	00	00
510.075	06	02	00	07	02	0C	03	00	06	02	06	02	0C	03	00	00
510.100	08	02	00	07	02	0C	03	00	08	02	06	02	0C	03	00	00
510.125	0A	02	00	07	02	0C	03	00	0A	02	06	02	0C	03	00	00
510.150	0C	02	00	07	02	0C	03	00	0C	02	06	02	0C	03	00	00
510.175	0E	02	00	07	02	0C	03	00	0E	02	06	02	0C	03	00	00
510.200	00	03	00	07	02	0C	03	00	00	03	02	06	02	0C	03	00
510.225	02	03	00	07	02	0C	03	00	02	03	02	06	02	0C	03	00
510.250	04	03	00	07	02	0C	03	00	04	03	02	06	02	0C	03	00
510.275	06	03	00	07	02	0C	03	00	06	03	02	06	02	0C	03	00
510.300	08	03	00	07	02	0C	03	00	08	03	02	06	02	0C	03	00
510.325	0A	03	00	07	02	0C	03	00	0A	03	02	06	02	0C	03	00
510.350	0C	03	00	07	02	0C	03	00	0C	03	02	06	02	0C	03	00
510.375	0E	03	00	07	02	0C	03	00	0E	03	02	06	02	0C	03	00
510.400	00	0E	07	02	0C	03	00	00	00	03	06	02	0C	03	00	00
510.425	02	00	0E	07	02	0C	03	00	02	00	03	06	02	0C	03	00
510.450	04	00	0E	07	02	0C	03	00	04	00	03	06	02	0C	03	00
510.475	06	00	0E	07	02	0C	03	00	06	00	03	06	02	0C	03	00
510.500	08	00	0E	07	02	0C	03	00	08	00	03	06	02	0C	03	00
510.525	0A	00	0E	07	02	0C	03	00	0A	00	03	06	02	0C	03	00
510.550	0C	00	0E	07	02	0C	03	00	0C	00	03	06	02	0C	03	00
510.575	0E	00	0E	07	02	0C	03	00	0E	00	03	06	02	0C	03	00
510.600	00	01	0E	07	02	0C	03	00	00	01	03	06	02	0C	03	00
510.625	02	01	0E	07	02	0C	03	00	02	01	03	06	02	0C	03	00
510.650	04	01	0E	07	02	0C	03	00	04	01	03	06	02	0C	03	00
510.675	06	01	0E	07	02	0C	03	00	06	01	03	06	02	0C	03	00
510.700	08	01	0E	07	02	0C	03	00	08	01	03	06	02	0C	03	00
510.725	0A	01	0E	07	02	0C	03	00	0A	01	03	06	02	0C	03	00
510.750	0C	01	0E	07	02	0C	03	00	0C	01	03	06	02	0C	03	00
510.775	0E	01	0E	07	02	0C	03	00	0E	01	03	06	02	0C	03	00
510.800	00	02	0E	07	02	0C	03	00	00	02	03	06	02	0C	03	00
510.825	02	0E	07	02	0C	03	00	02	02	03	06	02	0C	03	00	00
510.850	04	02	0E	07	02	0C	03	00	04	02	03	06	02	0C	03	00
510.875	06	02	0E	07	02	0C	03	00	06	02	03	06	02	0C	03	00
510.900	08	02	0E	07	02	0C	03	00	08	02	03	06	02	0C	03	00
510.925	0A	02	0E	07	02	0C	03	00	0A	02	03	06	02	0C	03	00
510.950	0C	02	0E	07	02	0C	03	00	0C	02	03	06	02	0C	03	00
510.975	0E	02	0E	07	02	0C	03	00	0E	02	03	06	02	0C	03	00
511.000	00	03	0E	07	02	0C	03	00	00	03	03	06	02	0C	03	00
511.025	02	03	0E	07	02	0C	03	00	02	03	03	06	02	0C	03	00
511.050	04	03	0E	07	02	0C	03	00	04	03	03	06	02	0C	03	00
511.075	06	03	0E	07	02	0C	03	00	06	03	03	06	02	0C	03	00
511.100	08	03	0E	07	02	0C	03	00	08	03	03	06	02	0C	03	00
511.125	0A	03	0E	07	02	0C	03	00	0A	03	03	06	02	0C	03	00
511.150	0C	03	0E	07	02	0C	03	00	0C	03	03	06	02	0C	03	00
511.175	0E	03	0E	07	02	0C	03	00	0E	03	03	06	02	0C	03	00
511.200	00	00	0F	07	02	0C	03	00	00	00	04	06	02	0C	03	00
511.225	02	00	0F	07	02	0C	03	00	02	00	04	06	02	0C	03	00
511.250	04	00	0F	07	02	0C	03	00	04	00	04	06	02	0C	03	00
511.275	06	00	0F	07	02	0C	03	00	06	00	04	06	02	0C	03	00
511.300	08	00	0F	07	02	0C	03	00	08	00	04	06	02	0C	03	00
511.325	0A	00	0F	07	02	0C	03	00	0A	00	04	06	02	0C	03	00
511.350	0C	00	0F	07	02	0C	03	00	0C	00	04	06	02	0C	03	00
511.375	0E	00	0F	07	02	0C	03	00	0E	00	04	06	02	0C	03	00
511.400	00	01	0F	07	02	0C	03	00	00	01	04	06	02	0C	03	00
511.425	02	01	0F	07	02	0C	03	00	02	01	04	06	02	0C	03	00
511.450	04	01	0F	07	02	0C	03	00	04	01	04	06	02	0C	03	00
511.475	06	01	0F	07	02	0C	03	00	06	01	04	06	02	0C	03	00